




# ET-Module PF3EVFAMZ2

ET-Module with three proximity switches Pepperl+Fuchs SB3,5-E2, signal "OPEN+MIDDLE+CLOSED", auf circuit board, in Vestamid-Housing 120x80x55 mm, with vision panel, with 2x solenoid valve cable gland M12x1,5

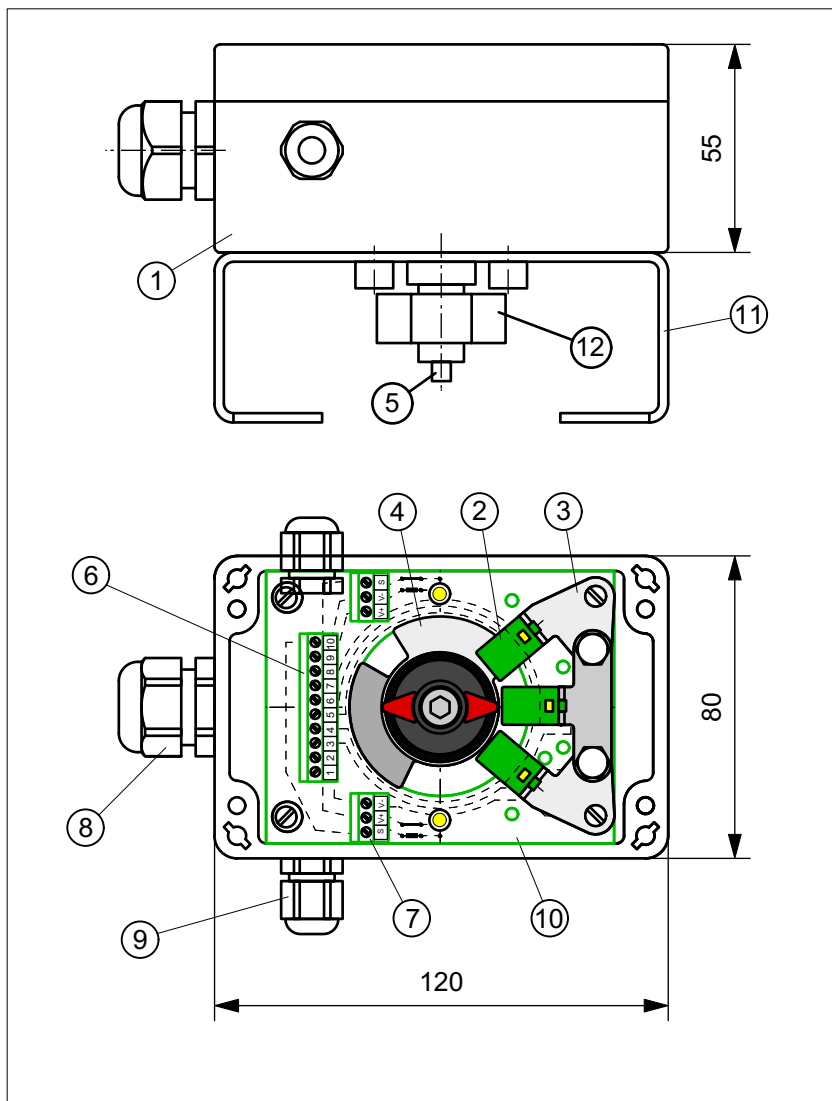


## OBJECT LIST

| Pos. | Pcs. | Description             | Material |
|------|------|-------------------------|----------|
| 1    | 1    | Housing                 | Vestamid |
| 2    | 3    | Sensor P+F SB3,5-E2     | -        |
| 3    | 3    | Sensor fastener         | A2       |
| 4    | 2    | Switch plates           | ABS + Ni |
| 5    | 1    | Axis                    | A2       |
| 6    | 1    | Terminal block, 10-pole | -        |
| 7    | 2    | Terminal block, 3-pole  | -        |
| 8    | 1    | Cable gland M20x1,5     | PA       |
| 9    | 2    | Cable gland M12x1,5     | PA       |
| 10   | 1    | Circuit board           | -        |
| 11   | 1    | Bracket size 1 - 4      | A2       |
| 12   | 1    | Position indicator      | PE       |


## TECHNICAL DATA

Manufacturer: Pepperl+Fuchs  
Type: SB3,5-E2,  
Slot type,  
Normally open contact  
PNP  
Depth of immersion: 5 ... 7 mm  
Operating voltage: 10 ... 30 V DC  
Operating current: 0 ... 100 mA  
Output: short-circuit protection,  
inverse-polarity protection  
Temperature: -25 ... +70°C  
Switch. frequency: 0 ... 3000 Hz  
Housing: Vestamid, black  
Cover with vision panel  
Sealing: EPDM  
Ingress protection: IP67 (Sensor)  
IP65 (Housing)  
Switch. precision: <1.5°  
System connection: Cable gland M20x1,5  
Clamp. range 8...13 mm  
Solenoid connect.: 2x Cable gland M12x1,5  
Clamp. range 4...7 mm



Housing cover  
with vision panel ø45

## WIRING DIAGRAM

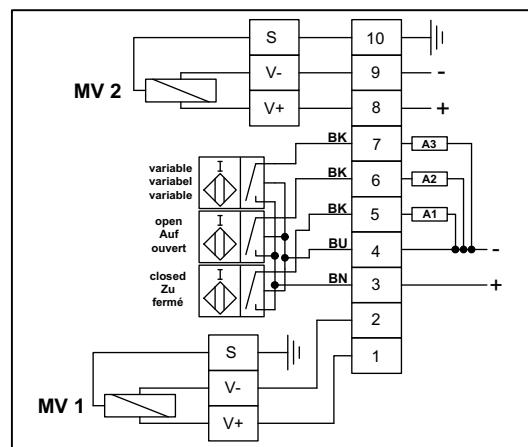

Więcej informacji - skontaktuj się z nami:

**ARA**®  
PNEUMATIK

ul. Wyścigowa 38 53-012 Wrocław  
tel. +48 71 364 72 85, 691 112 333  
armatura@arapneumatik.pl



arapneumatik.pl