




CCR3ASEAZ0TT


COM-Module with two micro switches Crouzet type 83.161.301
in Aluminium housing 140x89x62 mm, with high vision beacon "OPEN+CLOSED",
low-temperature design down to -40° C

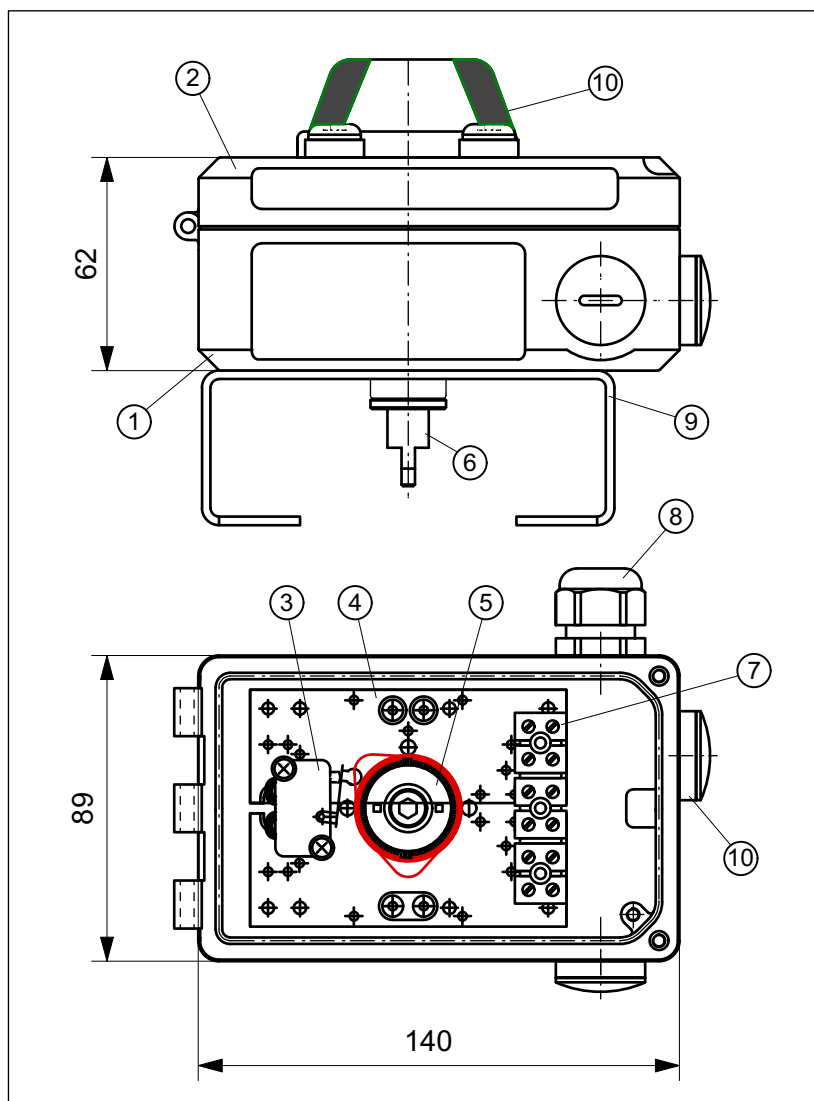

TECHNICAL DATA

Manufacturer: Crouzet
Type: 83.161.301
Silver contacts,
two-way contact (SPDT)
Switch. power: 4 A, 230 V AC/DC
Economic life time: 2×10^7 switch. cycles
Temperature: -40 ... +85°C
Housing: Aluminium
with high vision beacon
Sealing: PUR
Ingress protection: IP65 (housing)
IP40 (micro switch)
Switch. precision: 1,5°
System connection: Cable gland M20x1,5
Clamp. range 6...12 mm

WIRING DIAGRAM

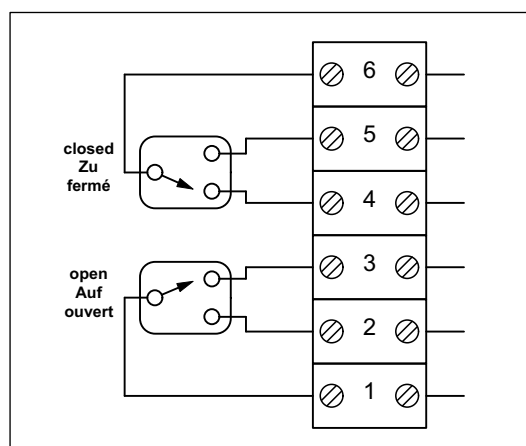

OBJECT LIST

Pos.	Pcs.	Description	Material
1	1	Housing	Aluminium
2	1	Cover with hinge	Aluminium
3	2	Micro switch	-
4	1	Mounting plate	Noryl
5	1	Switch cam system	POM
6	1	Axis	A2
7	1	Terminal block, 6-pole	-
8	1	Cable gland M20x1,5	Brass nickel-pl.
9	1	Bracket size 1 - 4	A2
10	2	Blind plug M20x1,5	Brass nickel-pl.
11	1	Vision beacon "Open / Closed"	-

Więcej informacji - skontaktuj się z nami:

ARA®
PNEUMATIK

ul. Wyścigowa 38 53-012 Wrocław
tel. +48 71 364 72 85, 691 112 333
armatura@arapneumatik.pl



arapneumatik.pl