



ALB-Modul mit zwei Näherungsinitiatoren P+F NBB2-V3-E2 auf Einbauplatine im Aluminium-Gehäuse 160x82x60 mm, mit Sichtanzeige "OPEN+CLOSED"

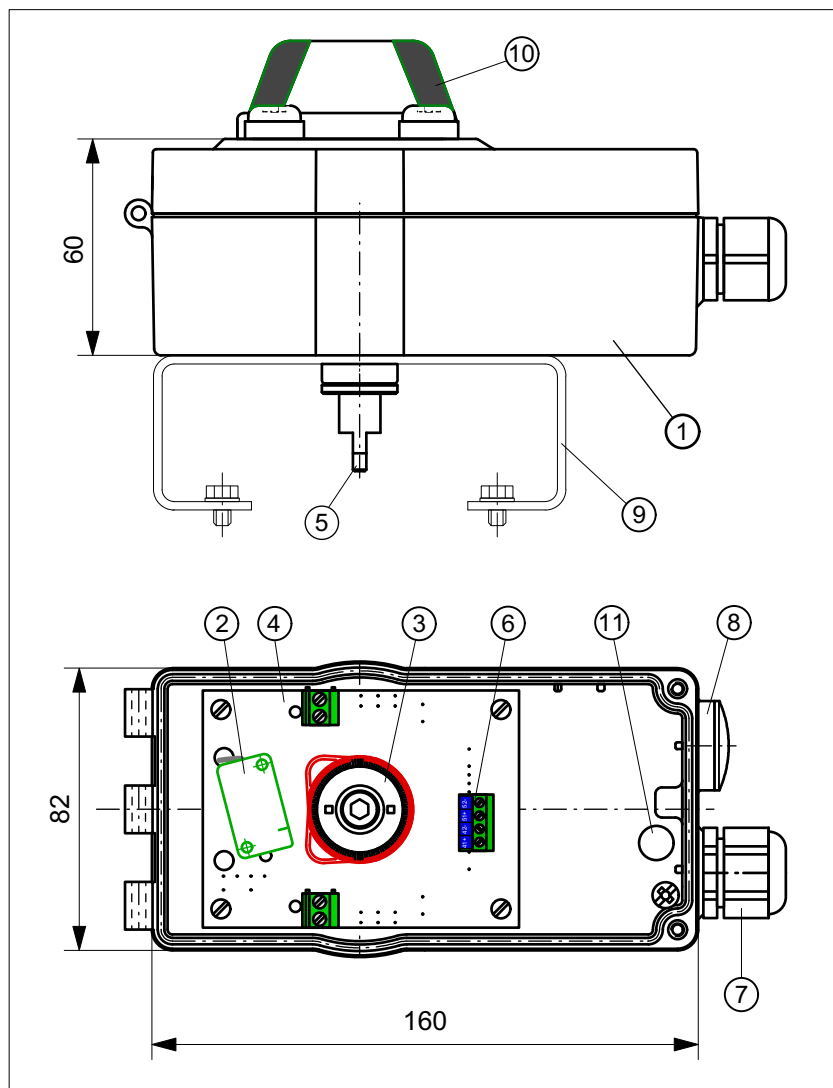

TECHNISCHE DATEN

Fabrikat:	Pepperl+Fuchs
Typ:	NBB2-V3-E2
	induktiv, Schließer PNP
Schaltabstand:	2 mm
Nennspannung:	10 ... 30 V DC
Betriebsstrom:	100 mA
Ausgang:	kurzschlussfest, verpolungssicher
Anzeige:	LED, gelb
Temperatur:	-25 ... +70° C
Gehäuse:	Aluminium mit Sichtanzeige
Dichtung:	PUR
Schutzart:	IP65
Schaltgenauigkeit:	< 1,5°
Systemanschluss:	Kabelverschr. M20x1,5 Klemmbereich 8-13 mm

KLEMMENPLAN

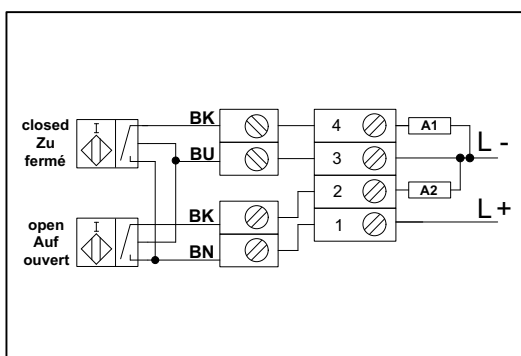

STÜCKLISTE

Pos.	Stck.	Bezeichnung	Werkstoff
1	1	Gehäuse	Aluminium
2	2	P+F NBB2-V3-E2	-
3	1	Schaltnockensystem	POM
4	1	Einbauplatine	-
5	1	Welle	A2
6	1	Klemmblock, 4-polig	-
7	1	Kabelverschraubung M20x1,5	PA
8	1	Blindstopfen M20x1,5	PA
9	1	Konsole Gr. 1 - 4	A2
10	1	Sichtanzeige "OPEN+CLOSED"	-
11	1	Be- und Entlüftungsmembran	-

Więcej informacji - skontaktuj się z nami:

ARA®
PNEUMATIK

ul. Wyścigowa 38 53-012 Wrocław
tel. +48 71 364 72 85, 691 112 333
armatura@arapneumatik.pl




arapneumatik.pl



APF2V3EASEAZ10

ALB-Module with two proximity switches P+F NBB2-V3-E2 on circuit board
in Aluminium-Housing 160x82x60 mm, with high vision beacon "OPEN+CLOSED"

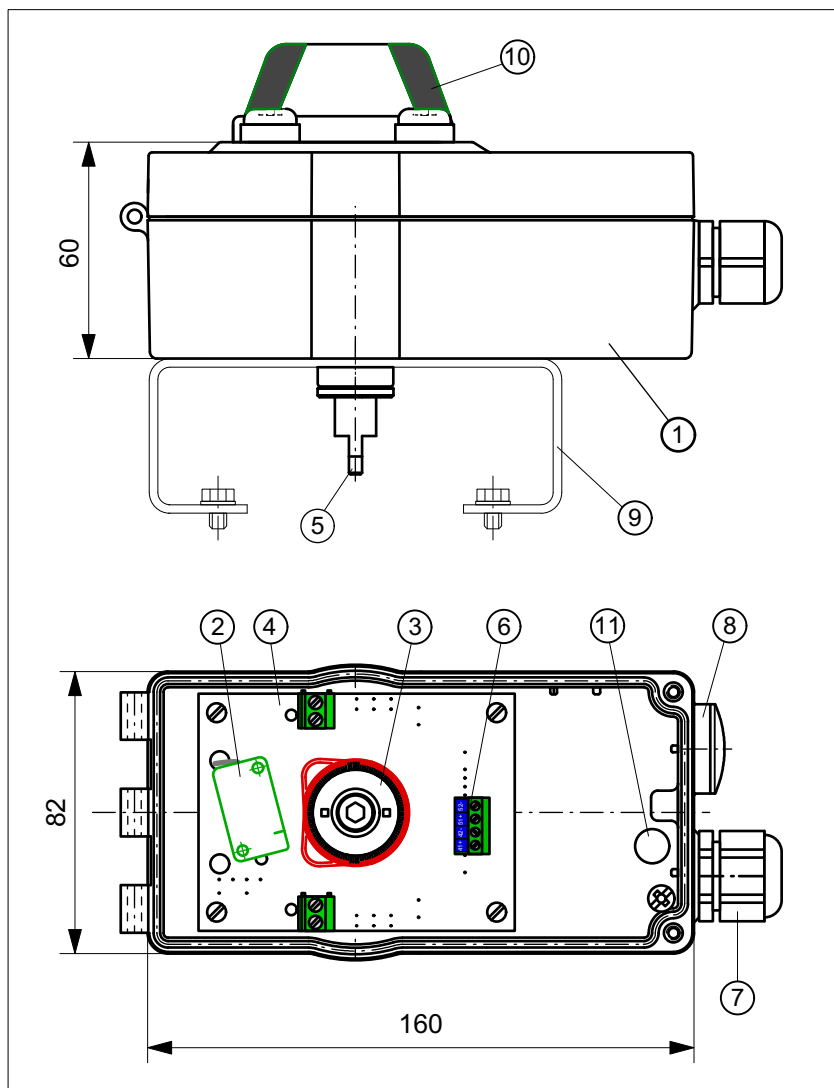

TECHNICAL DATA

Manufacturer:	Pepperl+Fuchs
Type:	NBB2-V3-E2 inductive, NO PNP
Operating distance:	2 mm
Nominal voltage:	10 ... 30 V DC
Operating current:	100 mA
Output:	short-circuit protection, inverse-polarity protect.
Signal:	LED, yellow
Temperature:	-25 ... +70° C
Housing:	Aluminium
Sealing:	PUR
Ingress protection:	IP65
Switch. precision:	< 1,5°
System connection:	Cable gland M20x1,5 Clamp. range 8-13 mm

OBJECT LIST

Pos.	Pcs.	Description	Material
1	1	Housing	Aluminium
2	2	P+F NBB2-V3-E2	
3	1	Switch cam system	POM
4	1	Circuit board	-
5	1	Axis	A2
6	1	Terminal block, 4-pole	-
7	1	Cable gland M20x1,5	PA
8	1	Blind plug M20x1,5	PA
9	1	Bracket size 1 - 4	A2
10	1	Vision beacon "OPEN+CLOSED"	-
11	1	Membrane	-

WIRING DIAGRAM

