

# LF 3000® Push-In Fittings / Stud Fittings

## Technical Characteristics

- **Compatible Fluids:** Compressed air  
Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C

Tightening Torque (daN.m)	Threads								
	M3 x0.5	M5 x0.8	M7 x1	M10 x1	M12 x1.5	G1/8	G1/4	G3/8	G1/2
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5


Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.

Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

## Advantages

- Robust, lightweight, compact to build your pneumatic circuits
- Full flow connections to optimize flow rates
- Use in vacuum as well as in compressed air
- Customised products upon request. Please, contact us.

## Component Materials

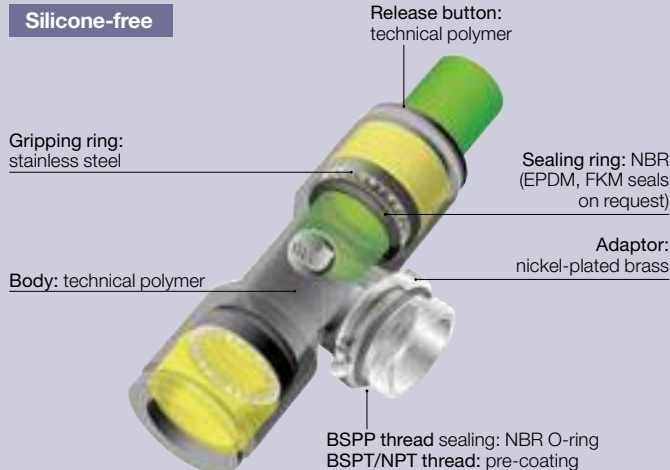


## Regulations

- ISO 14743
- PED
- RoHS
- REACH

## 3104 Equal and Unequal Tee

Technical polymer, NBR



ØD	ØD1		G	H	L/2	Kg
3	3	<b>3104 03 00</b>	8.5	19	14.5	0.004
	4	<b>3104 04 00</b>	8.5	19	14.5	0.002
4	6	<b>3104 04 06</b>	10.5	22.5	17.5	0.007
	4	<b>3104 06 04</b>	10.5	22.5	17.5	0.005
6	6	<b>3104 06 00</b>	10.5	22.5	17.5	0.003
	8	<b>3104 06 08</b>	13.5	29.5	23	0.015
8	4	<b>3104 08 04</b>	13.5	29	17.5	0.013
	6	<b>3104 08 06</b>	13.5	29.5	23	0.010
	8	<b>3104 08 00</b>	13.5	29.5	23	0.006
10	10	<b>3104 08 10</b>	16	34.5	26.5	0.020
	4	<b>3104 10 04</b>	16	33	26	0.023
	8	<b>3104 10 08</b>	16	34.5	26.5	0.014
10	10	<b>3104 10 00</b>	16	34.5	26.5	0.009
	12	<b>3104 10 12</b>	19	40.5	31	0.033
12	4	<b>3104 12 04</b>	19	39	31	0.040
	10	<b>3104 12 10</b>	19	40.5	31	0.023
	12	<b>3104 12 00</b>	19	40.5	31	0.014
14	8	<b>3104 14 08</b>	22	46	35.5	0.054
	14	<b>3104 14 00</b>	22	46	35.5	0.022
16	12	<b>3104 16 12</b>	27	52.5	39	0.088
	16	<b>3104 16 00</b>	27	52	39	0.063

DYSTRYBUTOR PARKER PREMIUM

**ARA**<sup>®</sup>  
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCŁAW  
pneumatyka@arapneumatik.pl  
TEL. 71 364 72 80

PARKER STORE KATOWICE  
katowice@arapneumatik.pl  
TEL. 32 779 76 40

**Parker Store**