

LF 3000® Push-In Fittings / Stud Fittings

Technical Characteristics

- **Compatible Fluids:** Compressed air
Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C

Tightening Torque (daN.m)	Threads								
	M3 x0.5	M5 x0.8	M7 x1	M10 x1	M12 x1.5	G1/8	G1/4	G3/8	G1/2
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5


Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.

Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

Advantages

- Robust, lightweight, compact to build your pneumatic circuits
- Full flow connections to optimize flow rates
- Use in vacuum as well as in compressed air
- Customised products upon request. Please, contact us.

Component Materials

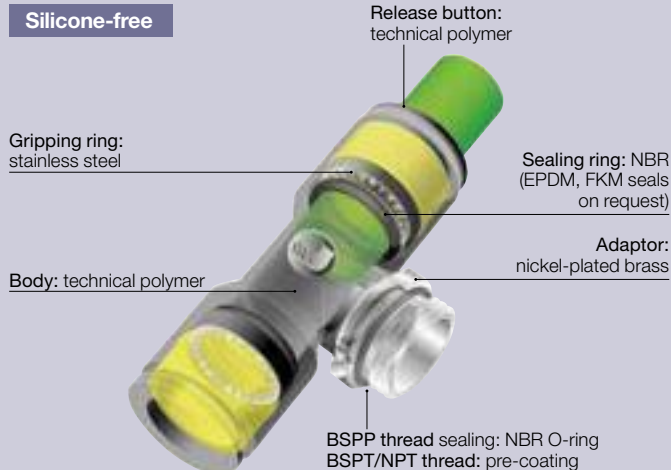


Regulations

- ISO 14743
- PED
- RoHS
- REACH

3106 Equal and Unequal Tube-to-Tube Connector

Technical polymer, NBR



ØD	ØD1		G	L	Kg
3	3	3106 03 00	8.5	25	0.002
	4	3106 03 04	8.5	25	0.002
4	1/4	3106 04 56	11	29.5	0.005
	4	3106 04 00	8.5	25	0.001
	6	3106 04 06	11	28	0.002
	8	3106 04 08	13.5	38	0.005
6	1/4	3106 06 56	13.5	36	0.009
	6	3106 06 00	10.5	28.5	0.002
	8	3106 06 08	13.5	38	0.005
	10	3106 06 10	16	42	0.008
8	8	3106 08 00	13.5	38	0.004
	10	3106 08 10	16	42	0.007
	12	3106 08 12	19	50.5	0.026
10	10	3106 10 00	16	42	0.005
	12	3106 10 12	19	50.5	0.018
12	1/2	3106 12 62	22	56.5	0.041
	12	3106 12 00	19	50.5	0.009
	14	3106 12 14	22	56	0.025
	16	3106 12 16	27	61	0.066
14	14	3106 14 00	22	56	0.014
	16	3106 14 00	27	60.5	0.041

DYSTRYBUTOR PARKER PREMIUM

ARA[®]
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCŁAW
pneumatyka@arapneumatik.pl
TEL. 71 364 72 80

PARKER STORE KATOWICE
katowice@arapneumatik.pl
TEL. 32 779 76 40

Parker Store