

# LF 3000® Push-In Fittings / Stud Fittings

## Technical Characteristics

- **Compatible Fluids:** Compressed air  
Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C

Tightening Torque (daN.m)	Threads								
	M3 x0.5	M5 x0.8	M7 x1	M10 x1	M12 x1.5	G1/8	G1/4	G3/8	G1/2
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5


Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.

Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

## Advantages

- Robust, lightweight, compact to build your pneumatic circuits
- Full flow connections to optimize flow rates
- Use in vacuum as well as in compressed air
- Customised products upon request. Please, contact us.

## Component Materials

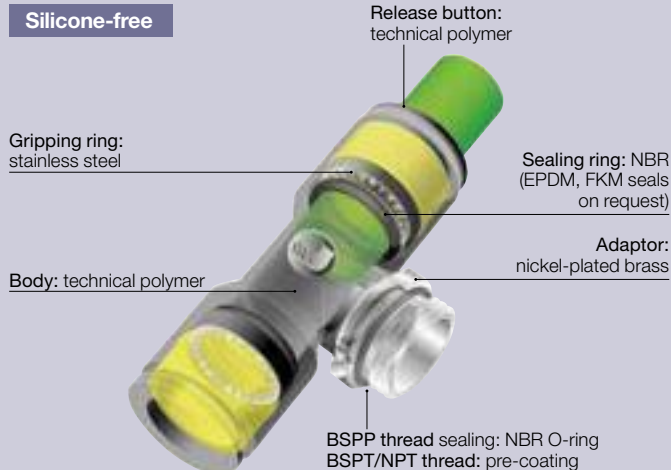


## Regulations

- ISO 14743
- PED
- RoHS
- REACH

## 3121 Stud Standpipe, Male BSPT Thread

Technical polymer, Nickel-plated brass



ØD	C		F	H	H1	Kg
4	R1/8	<b>3121 04 10</b>	10	26	14	0.005
	R1/4	<b>3121 04 13</b>	14	26.5	14.5	0.014
6	R1/8	<b>3121 06 10</b>	10	28	14	0.005
	R1/4	<b>3121 06 13</b>	14	28.5	14.5	0.014
8	R1/8	<b>3121 08 10</b>	10	29.5	11	0.005
	R1/4	<b>3121 08 13</b>	14	28.5	10	0.012
	R1/4	<b>3121 10 13</b>	15	36	15.5	0.012
10	R3/8	<b>3121 10 17</b>	17	36	15.5	0.017
	R1/2	<b>3121 10 21</b>	21	36	15.5	0.032
12	R3/8	<b>3121 12 17</b>	17	36.5	12	0.018
	R1/2	<b>3121 12 21</b>	21	36.5	12	0.030

Pre-coated thread

DYSTRYBUTOR PARKER PREMIUM

**ARA**®  
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCŁAW  
pneumatyka@arapneumatik.pl  
TEL. 71 364 72 80

PARKER STORE KATOWICE  
katowice@arapneumatik.pl  
TEL. 32 779 76 40

