

LF 3000® Push-In Fittings / Stud Fittings

Technical Characteristics

- **Compatible Fluids:** Compressed air
Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C

Tightening Torque (daN.m)	Threads								
	M3 x0.5	M5 x0.8	M7 x1	M10 x1	M12 x1.5	G1/8	G1/4	G3/8	G1/2
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.


Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

Advantages

- Robust, lightweight, compact to build your pneumatic circuits
- Full flow connections to optimize flow rates
- Use in vacuum as well as in compressed air
- Customised products upon request. Please, contact us.

Component Materials

Silicone-free

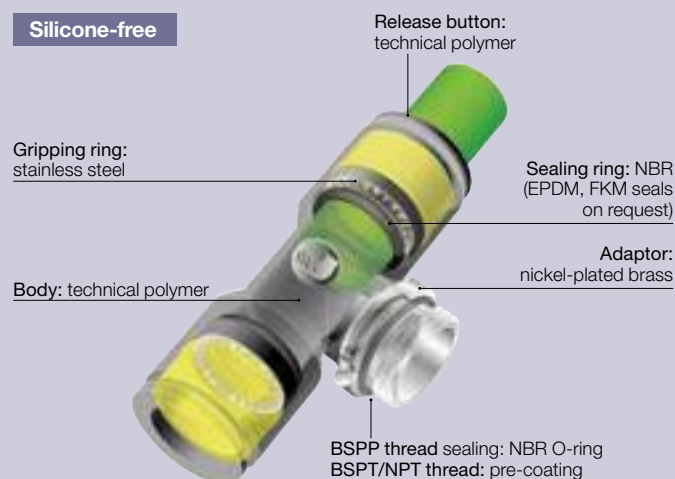


Regulations

- ISO 14743
- PED
- RoHS
- REACH

3122 Plug-In Barb Connector

Technical polymer



ØD1	ØD2	ØD3		L	L1	L2	Kg
4	3.2	5	3122 04 53	37	25	17	0.004
	5	7	3122 04 05	37	25	17	0.001
6	5	7	3122 06 05	39	25	17	0.001
	6.3	8.5	3122 08 56	39.5	21	17	0.001
8	8	10	3122 08 08	44.5	26	22	0.001
	6.3	8	3122 10 56	45	24.5	17	0.002
10	8	10	3122 10 08	50	29.5	22	0.002
	8	10	3122 12 08	50	26	22	0.002
12	10	12	3122 12 10	48.5	25.5	22.5	0.002
	12.5	14.5	3122 12 62	57	34	22.5	0.004
14	12.5	14.5	3122 14 62	59.5	34.5	22.5	0.006

DYSTRYBUTOR PARKER PREMIUM

ARA[®]
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCŁAW
pneumatyka@arapneumatik.pl
TEL. 71 364 72 80

PARKER STORE KATOWICE
katowice@arapneumatik.pl
TEL. 32 779 76 40

