

LF 3000® Push-In Fittings / Banjo Fittings



••• A modular solution designed to orientate the tube according to the application.

Technical Characteristics

- **Compatible Fluids:** Compressed air
Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C

| Tightening Torque (daN.m) | Threads | | | | | |
|---------------------------|---------|---------|------|------|------|------|
| | M3 x0.5 | M5 x0.8 | G1/8 | G1/4 | G3/8 | G1/2 |
| | 0.05 | 0.1 | 0.4 | 0.5 | 0.6 | 0.7 |

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.

Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).


Advantages

- Screwed from above, for minimum space between connections
- 360° orientable
- Stacking of banjo bodies to allow construction of 2 to 6 outlets

Component Materials

Silicone-free

Bolt: nickel-plated brass, with or without pre-coating, depending on the configuration

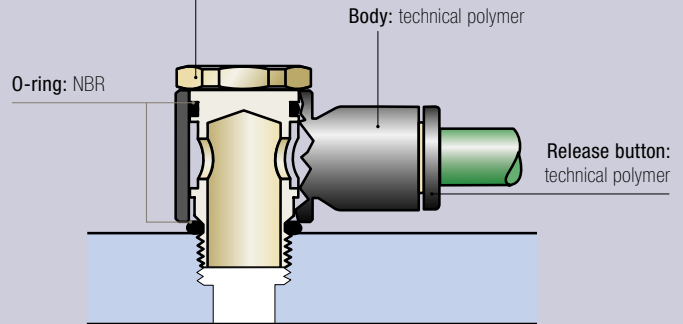


Regulations


- ISO 14743
- PED
- RoHS
- REACH

Installation Configurations

Thread and bore diameters for part numbers 3524 - 3527 - 3528 - 3529:




| Thread (C) | M5x0.8 | G1/8 | G1/4 | G3/8 | G1/2 |
|------------|--------|------|------|------|------|
| (DN) | 2.5 | 5.5 | 8.5 | 11 | 13 |

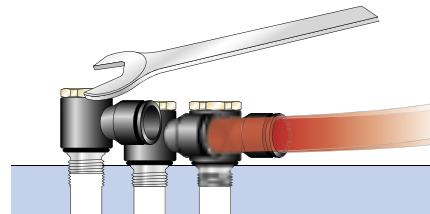

3124 Single Banjo, Male/Female BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



| ØD | C | | E | F | G | H | L | L1 | Kg |
|----|------|-------------------|---|-----|-----|------|------|----|-------|
| 4 | G1/8 | 3124 04 10 | 4 | 13 | 8.5 | 25.5 | 18.5 | 7 | 0.015 |
| 6 | G1/4 | 3124 06 13 | | 5.5 | 17 | 10.5 | 33 | 22 | 0.029 |
| 8 | G3/8 | 3124 08 17 | | 5.5 | 20 | 13.5 | 37.5 | 29 | 0.043 |

This product family was developed to allow assembly of a function fitting on a cylinder.

DYSTRYBUTOR PARKER PREMIUM

ARA[®]
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCŁAW
pneumatyka@arapneumatik.pl
TEL. 71 364 72 80

PARKER STORE KATOWICE
katowice@arapneumatik.pl
TEL. 32 779 76 40

