

# LF 3000® Push-In Fittings / Stud Fittings

## Technical Characteristics

- **Compatible Fluids:** Compressed air  
Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C

Tightening Torque (daN.m)	Threads								
	M3 x0.5	M5 x0.8	M7 x1	M10 x1	M12 x1.5	G1/8	G1/4	G3/8	G1/2
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5


Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.

Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

## Advantages

- Robust, lightweight, compact to build your pneumatic circuits
- Full flow connections to optimize flow rates
- Use in vacuum as well as in compressed air
- Customised products upon request. Please, contact us.

## Component Materials

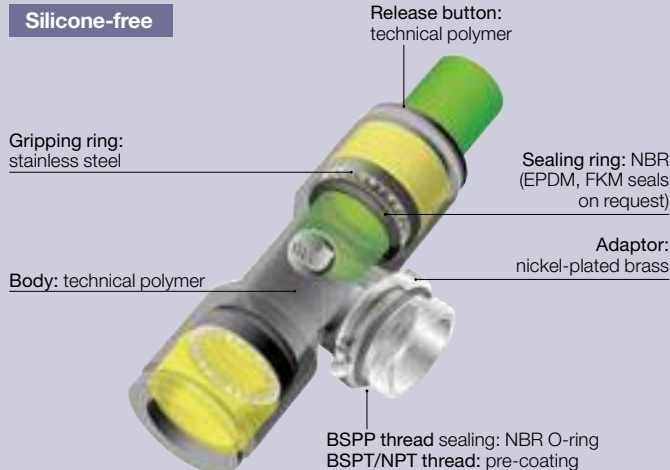


## Regulations

- ISO 14743
- PED
- RoHS
- REACH

## 3131 Stud Standpipe, Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



ØD	C		E	F	H	H1	Kg
4	M5x0.8	<b>3131 04 19</b>	3.5	8	31	16	0.002
	G1/8	<b>3131 04 10</b>	5	13	30	13.5	0.005
	G1/4	<b>3131 04 13</b>	5.5	16	31	13.5	0.010
6	G1/8	<b>3131 06 10</b>	5	13	32	13.5	0.005
	G1/4	<b>3131 06 13</b>	5.5	16	33	13.5	0.010
8	G1/8	<b>3131 08 10</b>	5	13	35.5	12.5	0.008
	G1/4	<b>3131 08 13</b>	5.5	16	34.5	10.5	0.010
	G3/8	<b>3131 08 17</b>	5.5	20	34.5	10.5	0.015
10	G1/4	<b>3131 10 13</b>	5.5	16	43.5	17.5	0.012
	G3/8	<b>3131 10 17</b>	5.5	20	41.5	15.5	0.015
	G1/2	<b>3131 10 21</b>	7	24	41.5	15.5	0.024
12	G3/8	<b>3131 12 17</b>	5.5	20	42	12	0.015
	G1/2	<b>3131 12 21</b>	7	24	43.5	12	0.024
14	G3/8	<b>3131 14 17</b>	5.5	20	46.5	14	0.016
	G1/2	<b>3131 14 21</b>	7	24	48	13.5	0.025

DYSTRYBUTOR PARKER PREMIUM

**ARA**<sup>®</sup>  
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCLAW  
pneumatyka@arapneumatik.pl  
TEL. 71 364 72 80

PARKER STORE KATOWICE  
katowice@arapneumatik.pl  
TEL. 32 779 76 40

