

# LF 3000® Push-In Fittings / Stud Fittings

## Technical Characteristics

- **Compatible Fluids:** Compressed air  
Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C

Tightening Torque (daN.m)	Threads								
	M3 x0.5	M5 x0.8	M7 x1	M10 x1	M12 x1.5	G1/8	G1/4	G3/8	G1/2
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5


Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.

Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

## Advantages

- Robust, lightweight, compact to build your pneumatic circuits
- Full flow connections to optimize flow rates
- Use in vacuum as well as in compressed air
- Customised products upon request. Please, contact us.

## Component Materials

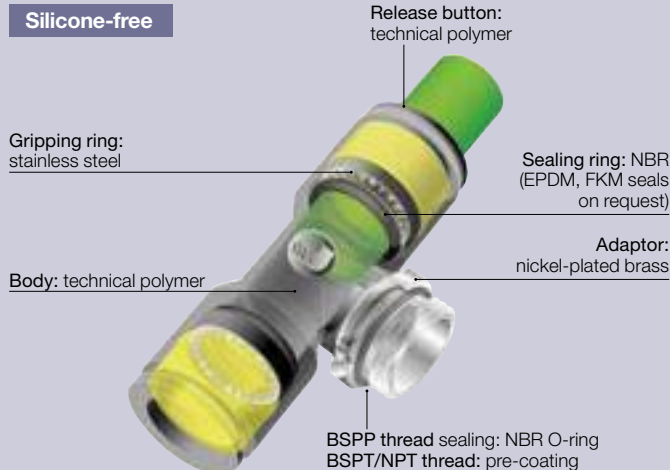


## Regulations

- ISO 14743
- PED
- RoHS
- REACH

## 3133 45° Elbow, Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



ØD	C		E	F	G	H	L	Kg
4	M5x0.8	<b>3133 04 19</b>	3.5	8	9	23	13	0.003
	G1/8	<b>3133 04 10</b>	4.5	13	9	20.5	13	0.006
6	M5x0.8	<b>3133 06 19</b>	3.5	8	11	28	14.5	0.003
	G1/8	<b>3133 06 10</b>	4.5	13	11	24	14.5	0.006
8	G1/4	<b>3133 06 13</b>	5.5	16	11	24	14.5	0.011
	G1/8	<b>3133 08 10</b>	4.5	13	13.5	31	19.5	0.009
10	G1/4	<b>3133 08 13</b>	5.5	16	13.5	29	19.5	0.012
	G3/8	<b>3133 08 17</b>	5.5	20	13.5	29	19.5	0.017
12	G1/4	<b>3133 10 13</b>	5.5	16	16	35	23	0.014
	G3/8	<b>3133 10 17</b>	5.5	20	16	33.5	23	0.017
12	G1/2	<b>3133 10 21</b>	7	24	16	33.5	23	0.026
	G1/4	<b>3133 12 13</b>	5.5	16	19	40.5	26	0.016
12	G3/8	<b>3133 12 17</b>	5.5	20	19	39	26	0.019
	G1/2	<b>3133 12 21</b>	7	24	19	39	26	0.029

The body swivels for positioning purposes.  
This model prevents distortion of the tube.

DYSTRYBUTOR PARKER PREMIUM

**ARA**<sup>®</sup>  
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCŁAW  
pneumatyka@arapneumatik.pl  
TEL. 71 364 72 80

PARKER STORE KATOWICE  
katowice@arapneumatik.pl  
TEL. 32 779 76 40

