

LF 3000® Push-In Fittings / Stud Fittings

Technical Characteristics

- **Compatible Fluids:** Compressed air
Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C

Tightening Torque (daN.m)	Threads								
	M3 x0.5	M5 x0.8	M7 x1	M10 x1	M12 x1.5	G1/8	G1/4	G3/8	G1/2
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.


Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

Advantages

- Robust, lightweight, compact to build your pneumatic circuits
- Full flow connections to optimize flow rates
- Use in vacuum as well as in compressed air
- Customised products upon request. Please, contact us.

Component Materials

Silicone-free

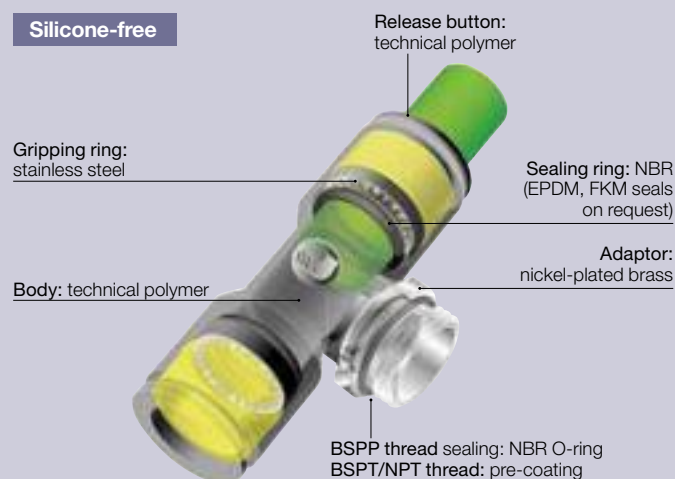


Regulations

- ISO 14743
- PED
- RoHS
- REACH

3139 Equal Bulkhead Elbow

Technical polymer, Nickel-plated brass, NBR



ØD		F	F1	G	H	K max	L	ØT min	Kg
4	3139 04 00	13	13	8.5	17	6.5	14.5	10.5	0.014
6	3139 06 00	17	15	10.5	19.5	7	17.5	12.5	0.021
8	3139 08 00	19	18	13.5	24	8	23	15.5	0.032
10	3139 10 00	22	22	16	28	8.5	26	18.5	0.048
12	3139 12 00	24	26	19	33	8.5	31	22.5	0.084
14	3139 14 00	27	29	25.5	37.5	10.5	36	25.5	0.117

The body swivels for positioning purposes.

DYSTRYBUTOR PARKER PREMIUM

ARA[®]
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCLAW
pneumatyka@arapneumatik.pl
TEL. 71 364 72 80

PARKER STORE KATOWICE
katowice@arapneumatik.pl
TEL. 32 779 76 40

Parker Store