

LF 3000® Push-In Fittings / Stud Fittings

Technical Characteristics

- **Compatible Fluids:** Compressed air
Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C

Tightening Torque (daN.m)	Threads								
	M3 x0.5	M5 x0.8	M7 x1	M10 x1	M12 x1.5	G1/8	G1/4	G3/8	G1/2
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.


Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

Advantages

- Robust, lightweight, compact to build your pneumatic circuits
- Full flow connections to optimize flow rates
- Use in vacuum as well as in compressed air
- Customised products upon request. Please, contact us.

Component Materials

Silicone-free

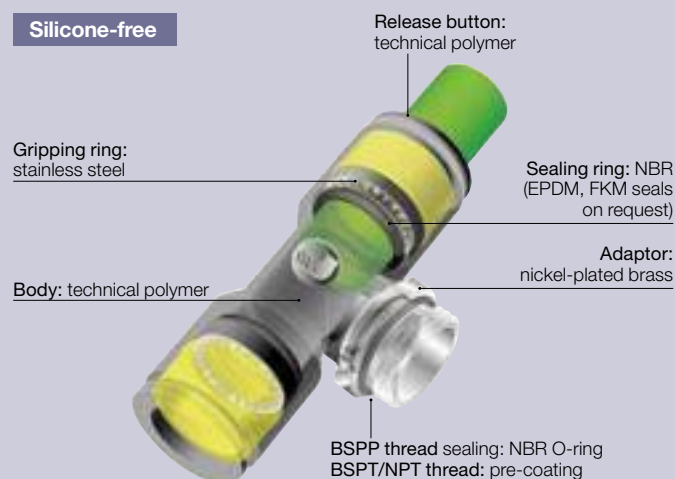


Regulations

- ISO 14743
- PED
- RoHS
- REACH

3168 Plug-In Increaser

Technical polymer, NBR



ØD1	ØD2		G	L	L1	Kg	
6	4	3168 06 04		10.5	35	23	0.002
8	6	3168 08 06		13.5	45	31.5	0.003
	1/4	3168 08 56		16	40	25.5	0.009
10	8	3168 10 08		16	42.5	21	0.004
12	10	3168 12 10		19	49	24.5	0.006

DYSTRYBUTOR PARKER PREMIUM

ARA®
PNEUMATIK
| arapneumatik.pl

PARKER STORE WROCLAW
pneumatyka@arapneumatik.pl
TEL. 71 364 72 80

PARKER STORE KATOWICE
katowice@arapneumatik.pl
TEL. 32 779 76 40

Parker Store