

# LF 3000® Push-In Fittings / Stud Fittings

## Technical Characteristics

- **Compatible Fluids:** Compressed air  
Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C

Tightening Torque (daN.m)	Threads								
	M3 x0.5	M5 x0.8	M7 x1	M10 x1	M12 x1.5	G1/8	G1/4	G3/8	G1/2
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.


Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

## Advantages

- Robust, lightweight, compact to build your pneumatic circuits
- Full flow connections to optimize flow rates
- Use in vacuum as well as in compressed air
- Customised products upon request. Please, contact us.

## Component Materials

Silicone-free

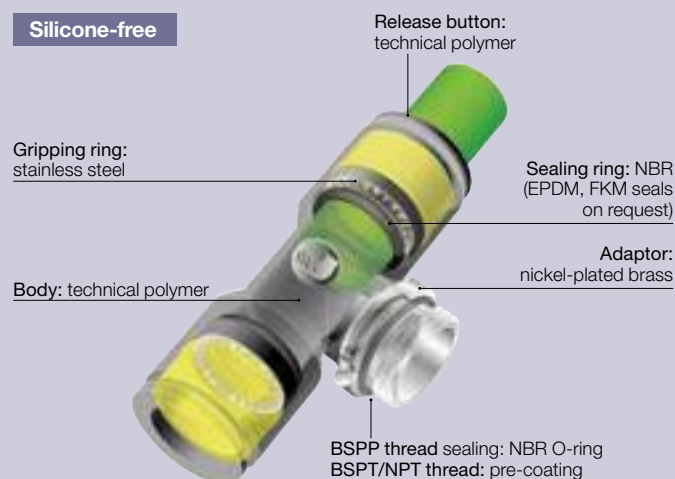


## Regulations

- ISO 14743
- PED
- RoHS
- REACH

## 3182 Equal and Unequal Plug-In Elbow

Technical polymer, NBR



ØD1	ØD2		G	H	H1	H2	L	Kg
4	4	<b>3182 04 00</b>	8.5	23	6	15.5	14	0.005
4	6	<b>3182 04 06</b>	10.5	26.5	7	17	16	0.004
6	4	<b>3182 06 04</b>	10.5	24.5	7	15.5	16	0.001
	6	<b>3182 06 00</b>	10.5	26.5	7	17	16	0.001
8	8	<b>3182 06 08</b>	13.5	33.5	8	21.5	23	0.007
	8	<b>3182 08 00</b>	13.5	33.5	8	21.5	23	0.003
10	10	<b>3182 08 10</b>	16	39	10	24.5	26.5	0.010
	10	<b>3182 10 00</b>	16	39	10	24.5	26.5	0.004
12	12	<b>3182 10 12</b>	19	44.5	10.5	27.5	31	0.016
	12	<b>3182 12 00</b>	19	45.5	10.5	27.5	31	0.007

The references in diameter 4mm and 12mm are not grooved in standard version

DYSTRYBUTOR PARKER PREMIUM

**ARA**<sup>®</sup>  
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCŁAW  
pneumatyka@arapneumatik.pl  
TEL. 71 364 72 80

PARKER STORE KATOWICE  
katowice@arapneumatik.pl  
TEL. 32 779 76 40

