

# LF 3000® Push-In Fittings / Stud Fittings

## Technical Characteristics

- **Compatible Fluids:** Compressed air  
Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C

Tightening Torque (daN.m)	Threads								
	M3 x0.5	M5 x0.8	M7 x1	M10 x1	M12 x1.5	G1/8	G1/4	G3/8	G1/2
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5


Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.

Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

## Advantages

- Robust, lightweight, compact to build your pneumatic circuits
- Full flow connections to optimize flow rates
- Use in vacuum as well as in compressed air
- Customised products upon request. Please, contact us.

## Component Materials

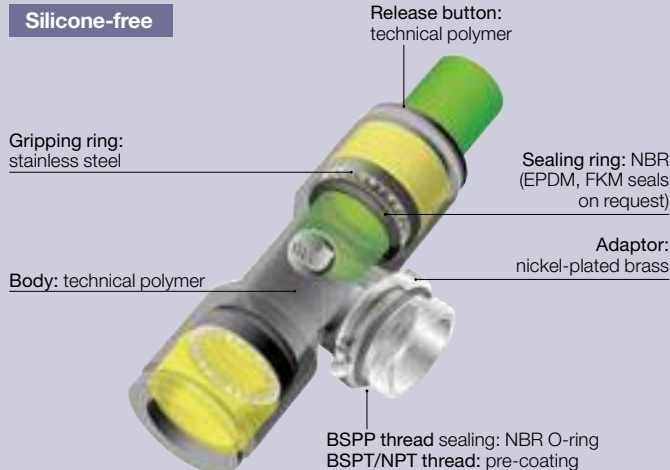


## Regulations

- ISO 14743
- PED
- RoHS
- REACH

## 3193 Stud Run Tee, Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



ØD	C		E	F	G	H	H1	L	Kg
4	M5x0.8	<b>3193 04 19</b>	3.5	8	8.5	26	11.5	14.5	0.003
	G1/8	<b>3193 04 10</b>	5	13	8.5	23	8.5	14.5	0.006
	G1/4	<b>3193 04 13</b>	5.5	16	8.5	23	8.5	14.5	0.011
6	M5x0.8	<b>3193 06 19</b>	3.5	8	10.5	29.5	12.5	17.5	0.004
	G1/8	<b>3193 06 10</b>	5	13	10.5	27	10	17.5	0.007
	G1/4	<b>3193 06 13</b>	5.5	16	10.5	27	10	17.5	0.012
8	G1/8	<b>3193 08 10</b>	4.5	13	13.5	36.5	14	23	0.011
	G1/4	<b>3193 08 13</b>	5.5	16	13.5	34.5	12	23	0.014
	G3/8	<b>3193 08 17</b>	5.5	20	13.5	34.5	12	23	0.019
10	G1/4	<b>3193 10 13</b>	5.5	16	16	42	15.5	26.5	0.017
	G3/8	<b>3193 10 17</b>	5.5	20	16	40.5	14	26.5	0.020
	G1/2	<b>3193 10 21</b>	7	24	16	40.5	14	26.5	0.029
12	G1/4	<b>3193 12 13</b>	5.5	16	19	48	17	31	0.021
	G3/8	<b>3193 12 17</b>	5.5	20	19	46.5	15.5	31	0.024
	G1/2	<b>3193 12 21</b>	7	24	19	46.5	15.5	31	0.033
14	G3/8	<b>3193 14 17</b>	5.5	20	22	56.5	21.5	35.5	0.036
	G1/2	<b>3193 14 21</b>	7	24	22	51	16	35.5	0.036
	G3/8	<b>3193 16 17</b>	7.5	27	27	79.5	41	38.5	0.121
16	G1/2	<b>3193 16 21</b>	9	27	27	79.5	41	38.5	0.117

The body swivels for positioning purposes.

DYSTRYBUTOR PARKER PREMIUM

**ARA**®  
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCŁAW  
pneumatyka@arapneumatik.pl  
TEL. 71 364 72 80

PARKER STORE KATOWICE  
katowice@arapneumatik.pl  
TEL. 32 779 76 40

