

# LF 3000® Push-In Fittings / Stud Fittings

## Technical Characteristics

- **Compatible Fluids:** Compressed air  
Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C

Tightening Torque (daN.m)	Threads								
	M3 x0.5	M5 x0.8	M7 x1	M10 x1	M12 x1.5	G1/8	G1/4	G3/8	G1/2
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.


Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

## Advantages

- Robust, lightweight, compact to build your pneumatic circuits
- Full flow connections to optimize flow rates
- Use in vacuum as well as in compressed air
- Customised products upon request. Please, contact us.

## Component Materials

Silicone-free

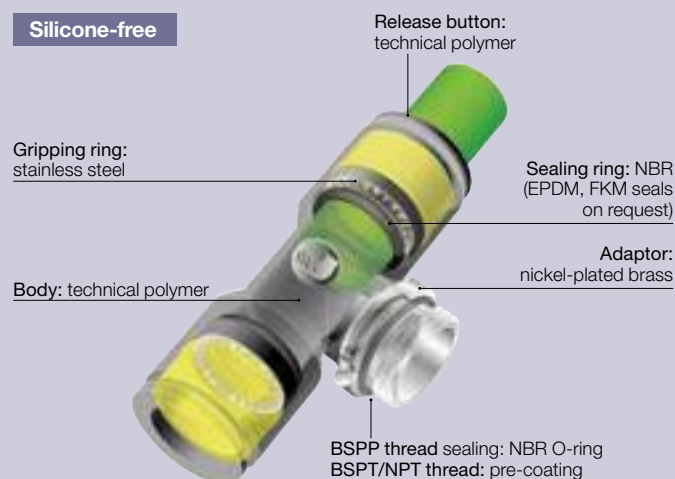



## Regulations

- ISO 14743
- PED
- RoHS
- REACH

## 3304 Multiple Tee

Technical polymer, NBR



ØD1	ØD2		H	L	L/2	N	ØT	Kg
6	4	 <b>3304 06 04</b>	24.5	34	37	11.5	4.2	0.015
8	4	<b>3304 08 04</b>	24.5	34	37	11.5	4.2	0.012
	6	<b>3304 08 06</b>	24.5	34	37	11.5	4.2	0.010
10	6	<b>3304 10 06</b>	36	44	40.5	14.5	4.2	0.019
	8	<b>3304 10 08</b>	36	44	40.5	15.5	4.2	0.015

DYSTRYBUTOR PARKER PREMIUM

**ARA**®  
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCŁAW  
pneumatyka@arapneumatik.pl  
TEL. 71 364 72 80

PARKER STORE KATOWICE  
katowice@arapneumatik.pl  
TEL. 32 779 76 40

**Parker Store**