

LF 3000® Push-In Fittings / Banjo Fittings



..... A modular solution designed to orientate the tube according to the application.

Technical Characteristics

- **Compatible Fluids:** Compressed air
Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C

Tightening Torque (daN.m)	Threads					
	M3 x0.5	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	0.05	0.1	0.4	0.5	0.6	0.7

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.


Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

Advantages


- Screwed from above, for minimum space between connections
- 360° orientable
- Stacking of banjo bodies to allow construction of 2 to 6 outlets

Installation Configurations

Thread and bore diameters for part numbers 3524 - 3527 - 3528 - 3529:




Thread (C)	M5x0.8	G1/8	G1/4	G3/8	G1/2
DN	2.5	5.5	8.5	11	13

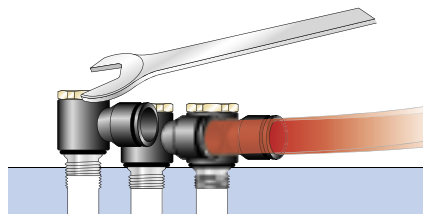

Component Materials

Silicone-free

Bolt: nickel-plated brass, with or without pre-coating, depending on the configuration

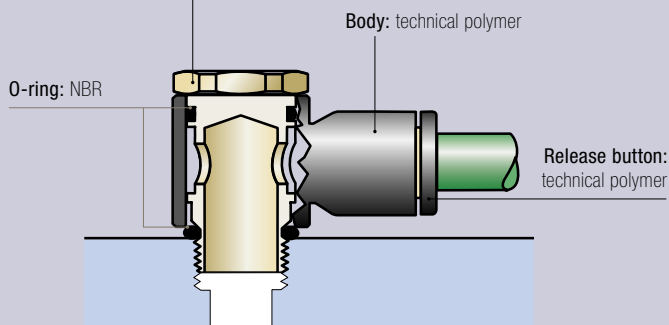


Regulations

- ISO 14743
- PED
- RoHS
- REACH

3524 Threaded Banjo Bolts, Male/Female BSPP and Metric Thread

Nickel-plated brass, NBR



C	F	H	H1	Kg
G1/8 3524 00 10	13	24.5	7.5	0.013
G1/4 3524 00 13	17	33	9.5	0.027
G3/8 3524 00 17	20	37.5	11	0.039
G1/2 3524 00 21	26	42	11.5	0.067

Full bore

DYSTRYBUTOR PARKER PREMIUM

ARA[®]
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCŁAW
pneumatyka@arapneumatik.pl
TEL. 71 364 72 80

PARKER STORE KATOWICE
katowice@arapneumatik.pl
TEL. 32 779 76 40

Parker Store