

# LF 3000® Push-In Fittings / Banjo Fittings



..... A modular solution designed to orientate the tube according to the application.

## Technical Characteristics

- **Compatible Fluids:** Compressed air  
Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C

Tightening Torque (daN.m)	Threads					
	M3 x0.5	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	0.05	0.1	0.4	0.5	0.6	0.7

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.


Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

## Advantages


- Screwed from above, for minimum space between connections
- 360° orientable
- Stacking of banjo bodies to allow construction of 2 to 6 outlets

## Installation Configurations

Thread and bore diameters for part numbers 3524 - 3527 - 3528 - 3529:




Thread (C)	M5x0.8	G1/8	G1/4	G3/8	G1/2
(DN)	2.5	5.5	8.5	11	13

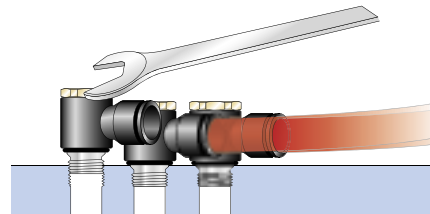

## Component Materials

### Silicone-free

Bolt: nickel-plated brass, with or without pre-coating, depending on the configuration

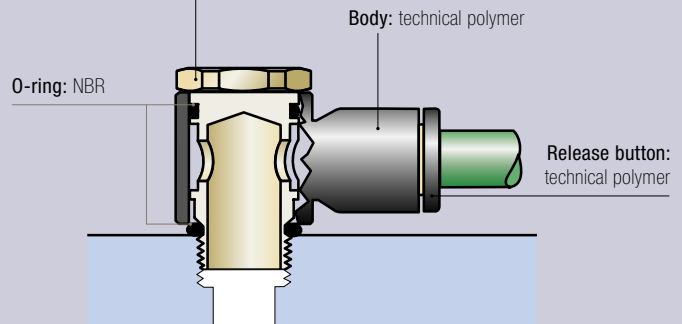


## Regulations

- ISO 14743
- PED
- RoHS
- REACH

## 3528 Stacking Banjo for 2 Body High Modules, Male BSPP and Metric Thread

Nickel-plated brass, NBR



C		F	H	H1	H2	Kg
M5x0.8	<b>3528 00 19*</b>		24.5	7.5	18.5	0.005
G1/8	<b>3528 00 10</b>	13	31	7.5	22	0.017
G1/4	<b>3528 00 13</b>	17	39	9.5	27.5	0.031
G3/8	<b>3528 00 17</b>	20	46	11	32.5	0.053

\*With screwdriver slot  
Full bore

Designed for use with 2 banjo bodies

DYSTRYBUTOR PARKER PREMIUM

**ARA**®  
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCLAW  
pneumatyka@arapneumatik.pl  
TEL. 71 364 72 80

PARKER STORE KATOWICE  
katowice@arapneumatik.pl  
TEL. 32 779 76 40

