


COM-Module with proximity switches Pepperl+Fuchs SJ3,5-N,
in Aluminium-Housing 140 x 89 x 62 mm, with high vision beacon "Open / Closed"



TECHNICAL DATA

Manufacturer:	Pepperl+Fuchs
Type:	SJ3,5-N, Slot type, NAMUR Normally closed contact
Depth of immersion:	5 ... 7 mm
Nominal voltage:	8,2 V DC
Current consumption:	≥ 3 mA, inactive ≤ 1 mA, active
Temperature:	-25 ... +85°C*
Switch. frequency:	0 ... 3000 Hz
Housing:	Aluminium, with vision beacon
Sealing:	PUR
Ingress protection:	IP67 (Sensor) IP65 (Housing)
Switch. precision:	$< 1.5^\circ$
System connection:	Cable gland M20x1,5 Clamping range 8...13 mm

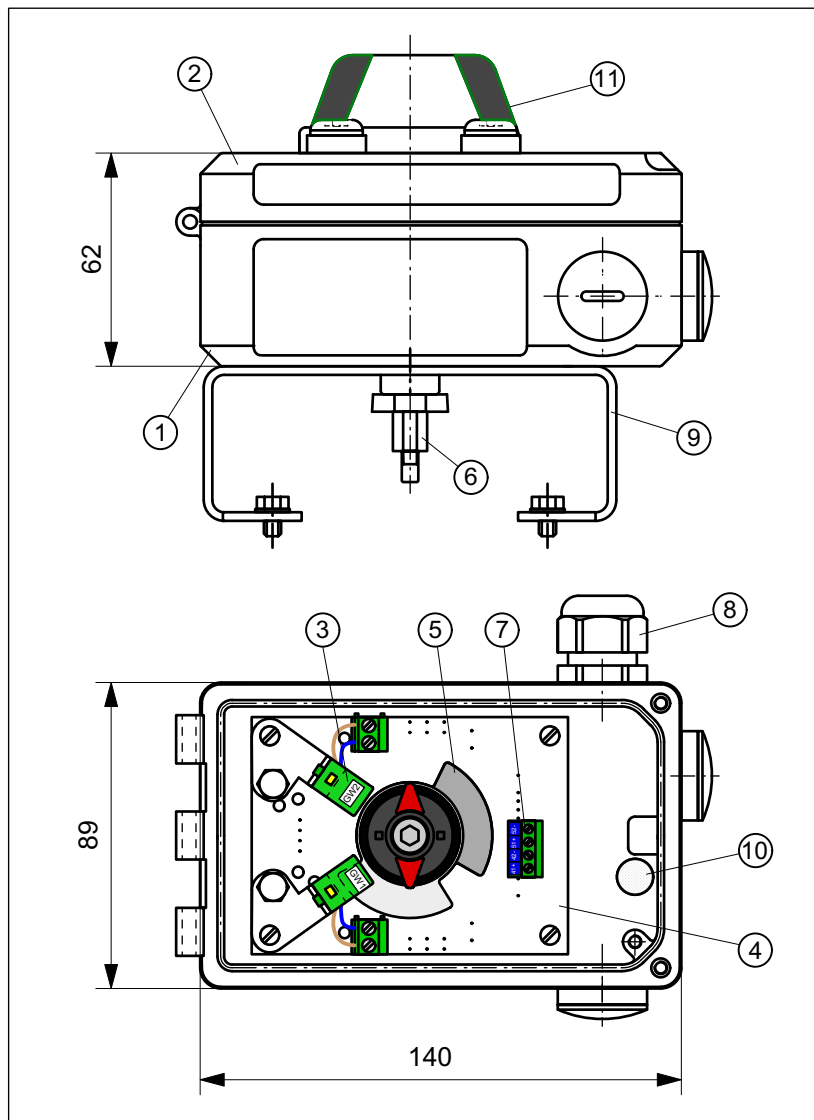


II 2G Ex ia IIC T6 Gb

EG type-examination certificate No.
PTB 99 ATEX 2219 X

* The assignment between the max. permissible ambient temperature, the temperature class and the electrical supply data of the intrinsically safe circuit, must be taken from the EC-type examination certificate of the sensor.

WIRING DIAGRAM

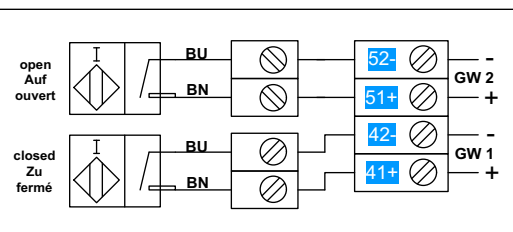

OBJECT LIST

Pos.	Pcs.	Description	Material
1	1	Housing	Aluminium
2	1	Cover with hinge	Aluminium
3	2	Slot sensor SJ3,5-N	-
4	1	Circuit board	-
5	1	Switch plate	POM + Al
6	1	Axis TCR	POM
7	1	Terminal block, 4-pole	-
8	1	Cable gland M20x1,5	PA
9	1	Konsole Gr. 1 - 4	A2
10	1	Membrane	-
11	1	Vision beacon "Open / Closed"	-

Więcej informacji - skontaktuj się z nami:

ARA®
PNEUMATIK

ul. Wyścigowa 38 53-012 Wrocław
tel. +48 71 364 72 85, 691 112 333
armatura@arapneumatik.pl



arapneumatik.pl