

# Flow Control Regulators



Available with technical polymer, nickel-plated brass or aluminium bodies, with external or recessed adjustment screws, Flow Control Regulators offer precise adjustment, accuracy and compactness.

Ø metric:  
3 to 14 mm

## Technical Characteristics

- **Compatible Fluids:** Compressed air  
Other fluids: contact us
- **Working Pressure:** 1 to 10 bar
- **Working Temperature:** 0°C to +70°C  
-25°C to +70°C (metal version)

Max. Tightening Torques (external adjustment screw)	Threads	M3 x0.5	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m		0.06	0.16	0.8	1.2	3

Max. Tightening Torques (recessed adjustment screw)	Threads	-	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m		-	0.1	0.4	0.5	0.6

Reliable performance is dependent upon the type of fluid conveyed and component materials being used.

Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).


You will find all the flow rate characteristic curves (to 6 bar) for Flow Control Regulators at the end of the chapter.

## Regulations

- RoHS
- REACH
- PED

## Component Materials

### Silicone-free

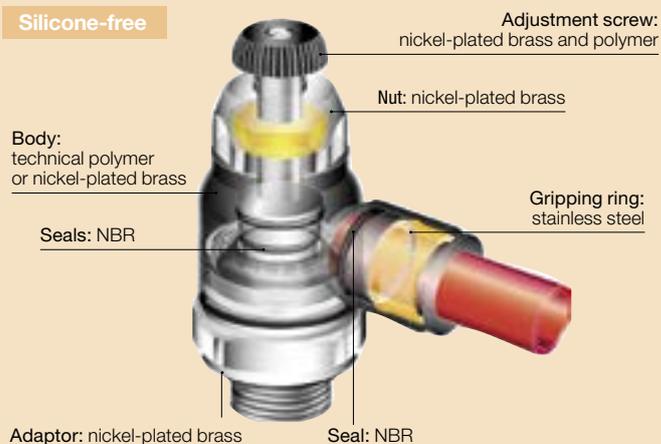

## Advantages

### Productivity:

- Higher maximum flow than standard regulators
- Optimal control of the cylinder rod speed

### Accuracy:


- Precise adjustment for accurate flow regulation
- Long-term stability of flow

### Ergonomics:

- External adjustment screw: easy to adjust ; Recessed adjustment screw: protects the adjustment mechanism
- Can be rotated 360° during assembly

## 7012 Bi-Directional Flow Regulator Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR

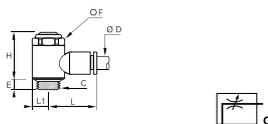

ØD	C		E	F	H	L	L1	Kg
4	M5x0.8	<b>7012 04 19</b>	4	8	17.5	17	5	0.006
	G1/8	<b>7012 04 10</b>	5	13	25	19	7	0.018
6	M5x0.8	<b>7012 06 19</b>	4	8	17.5	19	5	0.006
	G1/8	<b>7012 06 10</b>	5	13	25	21	7	0.019
8	G1/4	<b>7012 06 13</b>	8	17	26.5	22	9.5	0.035
	G1/8	<b>7012 08 10</b>	5	13	25	26	7	0.019
8	G1/4	<b>7012 08 13</b>	8	17	26.5	27	9.5	0.036
	G3/8	<b>7012 08 17</b>	7.5	20	37.5	29	11	0.071

DYSTRYBUTOR PARKER PREMIUM

**ARA**<sup>®</sup>  
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCŁAW  
pneumatyka@arapneumatik.pl  
TEL. 71 364 72 80

PARKER STORE KATOWICE  
katowice@arapneumatik.pl  
TEL. 32 779 76 40

**Parker Store**