

# Flow Control Regulators



Available with technical polymer, nickel-plated brass or aluminium bodies, with external or recessed adjustment screws, Flow Control Regulators offer precise adjustment, accuracy and compactness.

Ø metric:  
3 to 14 mm

## Technical Characteristics

- **Compatible Fluids:** Compressed air  
Other fluids: contact us
- **Working Pressure:** 1 to 10 bar
- **Working Temperature:** 0°C to +70°C  
-25°C to +70°C (metal version)

Max. Tightening Torques (external adjustment screw)	Threads	M3 x0.5	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m	0.06	0.16	0.8	1.2	3	3.5

Max. Tightening Torques (recessed adjustment screw)	Threads	-	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m	-	0.1	0.4	0.5	0.6	0.7

Reliable performance is dependent upon the type of fluid conveyed and component materials being used.

Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).


You will find all the flow rate characteristic curves (to 6 bar) for Flow Control Regulators at the end of the chapter.

## Regulations

- RoHS
- REACH
- PED

## Component Materials

### Silicone-free

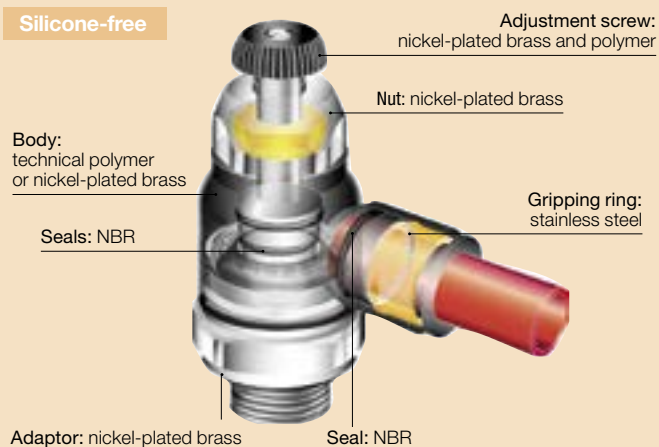

## Advantages

### Productivity:

- Higher maximum flow than standard regulators
- Optimal control of the cylinder rod speed

### Accuracy:


- Precise adjustment for accurate flow regulation
- Long-term stability of flow

### Ergonomics:

- External adjustment screw: easy to adjust ; Recessed adjustment screw: protects the adjustment mechanism
- Can be rotated 360° during assembly

## 7770 In-Line One-Way Flow Regulator

Technical polymer, Nickel-plated brass, NBR



ØD		F	H max	H min	K	L	L1	N	N1	ØT	Kg
4	<b>7770 04 00</b>	5	33.5	29.5	12	36	15	11	8	2.2	0.009
6	<b>7770 06 00</b>	8	44.5	40.5	17	51	23	17	11	3.2	0.024
8	<b>7770 08 00</b>	11	52.5	46.5	18.5	58	26	20	12.5	3.2	0.048
10	<b>7770 10 00</b>	14	61	53	24	73	33	26	16	4.2	0.097
12	<b>7770 12 00</b>	14	67.5	59	28	85	35	27.5	20	4.2	0.132

DYSTRYBUTOR PARKER PREMIUM

**ARA**<sup>®</sup>  
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCLAW  
pneumatyka@arapneumatik.pl  
TEL. 71 364 72 80

PARKER STORE KATOWICE  
katowice@arapneumatik.pl  
TEL. 32 779 76 40

**Parker Store**