

Accessories for Direct Buried and Direct Install Connectors

Parker Legris has designed different accessories to improve **safety** and allow circuit **identification**.

Product Advantages

Tamper-Proof Safety Clip	Prevents accidental disconnection
	Disconnection only possible with tooling
	Resistant to grease and cleaning agents
	Colour-coding for tube identification (6 colours)
	Adapted to suit all installation configurations
Detectable Buried End Cap	Easy detection of loose underground network's termination
	Cost and time saving when maintaining or expanding the network
	Metal cover locks to plastic end cap during microduct connection to enable visual detection of correct positioning over time




Underground Networks
Micro-Tubing
Air Blowing
Water Floating
Heavy Duty Ducting

Applications

Technical Characteristics

	Detectable Buried End Cap
Working Pressure	Vacuum to 25 bar
Working Temperature	-20°C to +80°C
Suitable Ducts	Direct install and direct buried microducts
Tubing Diameter	Ø 7 mm to Ø 14 mm

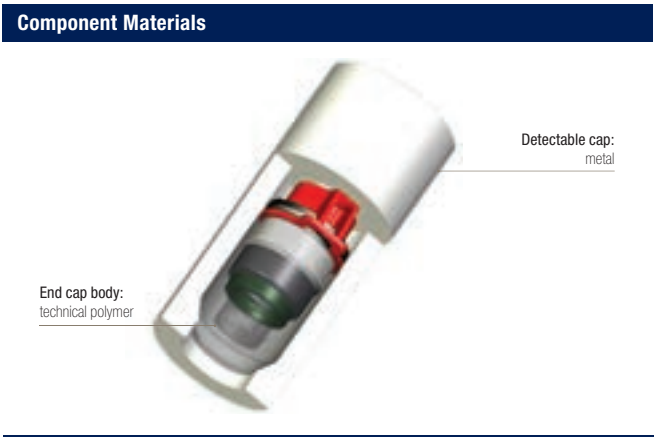

Installation Process

Tamper-Proof Safety Clip

Connection

1. Assemble the clip
2. Connect the tubing

Disconnection

1. Cut the clip with pliers
2. Remove the clip and tubing


Detectable Buried End Cap

1. A cap, a clip and a metal cover
2. Assemble the clip on the cap
3. Mount the cap within the metal cover
4. Connect the tube

Accessories for Direct Buried and Direct Install Connectors

3130 Tamper-Proof Safety Clip


Technical polymer



ØD							H	K	Kg
4	3130 04 01	3130 04 02	3130 04 03	3130 04 04	3130 04 05	3130 04 10	6.5	3	0.001
6	3130 06 01	3130 06 02	3130 06 03	3130 06 04	3130 06 05	3130 06 10	8	3	0.001
8	3130 08 01	3130 08 02	3130 08 03	3130 08 04	3130 08 05	3130 08 10	9.5	4.3	0.001
10	3130 10 01	3130 10 02	3130 10 03	3130 10 04	3130 10 05	3130 10 10	10.8	4.2	0.001
12	3130 12 01	3130 12 02	3130 12 03	3130 12 04	3130 12 05	3130 12 10	12.5	5.1	0.004
14	3130 14 01	3130 14 02	3130 14 03	3130 14 04	3130 14 05	3130 14 10	15	6	0.004

6276 Detectable Buried End Cap


Technical polymer, steel, NBR



ØD		G	H	Kg
7	6276 07 00	20	45	0.054
8	6276 08 00	20	45	0.054
10	6276 10 00	22	45	0.043
12	6276 12 00	24	50	0.064
14	6276 14 00	27.5	60	0.065

Delivered as 3 separate parts.

Bridging of O.D./I.D. Connector

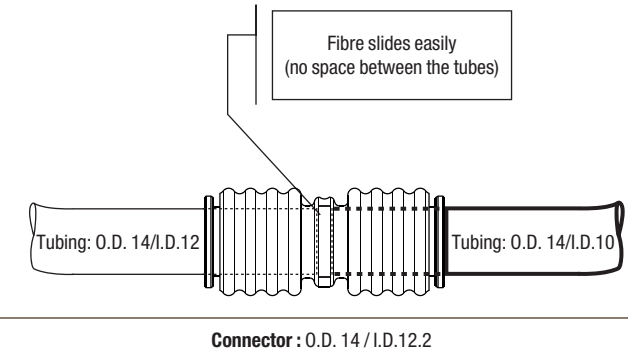

Connector O.D. (mm)/ I.D. (mm)	Tube O.D. (mm)	Tube I.D. (mm)
5 / 4	5	2.1 to 3.8
7 / 5.7	7	3 to 5.5
8 / 6.2	8	3.5 to 6
10 / 8.2	10	5.5 to 8
12 / 12.2	12	8 to 10
14 / 12.2	14	9.6 to 12

DYSTRYBUTOR PARKER PREMIUM

ARA
PNEUMATIK
| arapneumatik.pl

PARKER STORE WROCŁAW
pneumatyka@arapneumatik.pl
TEL. 71 364 72 80

PARKER STORE KATOWICE
katowice@arapneumatik.pl
TEL. 32 779 76 40

