
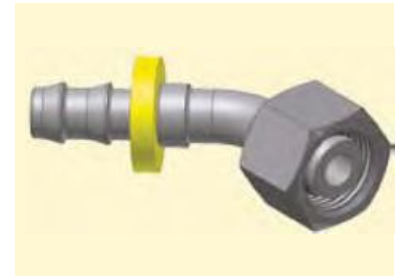



**CE** Female Metric 24°  
Light Series with O-Ring  
Swivel – 45° Elbow

ISO 12151-2-SWE 45°-L – DKOL 45°



XXXXX-XX-XX Part Number 	Hose I.D.				Thread metric	Tube O.D. mm	A mm	B mm	E mm	W mm
	DN	Inch	Size	mm						
3CE82-6-4	6	1/4	-4	6.3	M12x1.5	6	56	37	21	14
3CE82-8-4	6	1/4	-4	6.3	M14x1.5	8	51	31	16	17
3CE82-10-6	10	3/8	-6	9.5	M16x1.5	10	59	37	19	19
3CE82-12-6	10	3/8	-6	9.5	M18x1.5	12	60	37	19	22
3CE82-15-8	12	1/2	-8	12.7	M22x1.5	15	69	43	21	27
3CE82-18-10	16	5/8	-10	15.9	M26x1.5	18	83	46	23	32
3CE82-22-12	20	3/4	-12	19.1	M30x2	22	97	60	26	36

Fittings with standard O-ring seals can be used for temperatures from -30 °C up to +105 °C.

Parker Dystrybutor:

**ARA**<sup>®</sup>  
PNEUMATIK  
53-012 Wrocław ul. Wyścigowa 38  
[www.arapneumatik.pl](http://www.arapneumatik.pl)



Also available in stainless steel. Details can be found in CAT 4400.1/UK

Approved **fitting series** for hose types:

B: Brass; K: Without plastic ring; SM: Metric Hexagon

**82** 801 804 821FR 830M 831 836 837BM 837PU 838M