




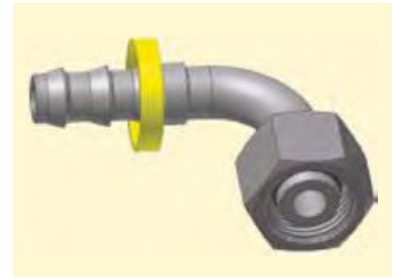


CF **Female Metric 24°
Light Series with O-Ring
Swivel – 90° Elbow**

ISO 12151-2-SWE-L – DKOL 90°



XXXXX-XX-XX Part Number 	 Hose I.D.				 Thread metric	Tube O.D. mm	A mm	B mm	E mm	 W mm
	DN	Inch	Size	mm						
3CF82-6-4	6	1/4	-4	6.3	M12x1.5	6	42	23	36	14
3CF82-8-4	6	1/4	-4	6.3	M14x1.5	8	41	23	29	17
3CF82-10-4	6	1/4	-4	6.3	M16x1.5	10	42	23	31	19
3CF82-10-6	10	3/8	-6	9.5	M16x1.5	10	49	27	35	19
3CF82-10-6B	10	3/8	-6	9.5	M16x1.5	10	49	27	35	19
3CF82-12-6	10	3/8	-6	9.5	M18x1.5	12	49	27	35	22
3CF82-12-6B	10	3/8	-6	9.5	M18x1.5	12	49	27	35	22
3CF82-15-8	12	1/2	-8	12.7	M22x1.5	15	60	34	41	27
3CF82-15-8B	12	1/2	-8	12.7	M22x1.5	15	60	34	41	27
3CF82-18-10	16	5/8	-10	15.9	M26x1.5	18	74	37	45	32
3CF82-22-12	20	3/4	-12	19.1	M30x2	22	83	46	55	36

Fittings with standard O-ring seals can be used for temperatures from -30 °C up to +105 °C.
Special O-rings are available on request.


Parker Dystrybutor:

ARA[®]
PNEUMATIK
53-012 Wrocław ul. Wyścigowa 38
www.arapneumatik.pl



Approved **fitting series** for hose types:

B: Brass; K: Without plastic ring; SM: Metric Hexagon

82  801 804 821FR 830M 831 836 837BM 837PU 838M