



2/2

VALVES FOR ALL FLUIDS AND AIR DIRECT OPERATED






BRASS PIPE MOUNTING NORMALLY CLOSED



Port size	Orifice Ø	Flow factors			Seat Seal	Atex Zone	Operating Pressure Differential		Fluid Temp.		Power	Voltage	Solenoid Valve Order Number
		Kv l/min	KV m³/h	Qn l/min			Min bar	Max bar	Min °C	Max °C			
BSP	mm										W		
1/4"	3	4.5	0.27	320	FKM	-	0	10	-10	100	8	220-230V/50Hz	E121K0352-2995-4818653D
							0	7	-10	100	9	24 Vdc	E121K0352-2995-481865C2
	4	7.5	0.45	480		-	0	10	-10	100	8	220-230V/50Hz	121K0250-2995-4818653D
							0	4	-10	100	9	24 Vdc	121K0250-2995-481865C2

Fast Delivery

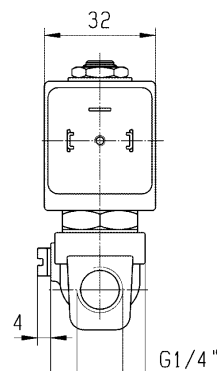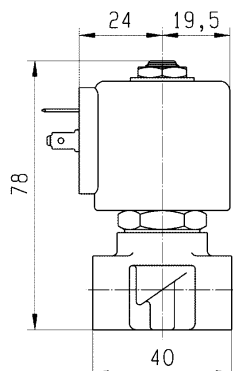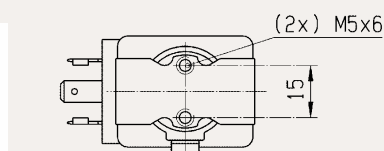

ARA[®]

PNEUMATIK

ul. Wyścigowa 38, 53-012 Wrocław
tel. 71 364 72 82, ara@arapneumatik.pl
www.arapneumatik.pl

