


2/2

VALVES FOR ALL FLUIDS AND AIR

DIRECT OPERATED




All Fluids & Air

BRASS

PIPE MOUNTING


NORMALLY CLOSED



Port size	Orifice Ø	Flow factors			Seat Seal	Atex Zone	Operating Pressure Differential		Fluid Temp.		Power	Voltage	Solenoid Valve Order Number
							Min bar	Max bar	Min °C	Max °C			
BSP	mm	Kv l/min	KV m³/h	Qn l/min							W		
1/2"	8.5	25	1.50	1600	FKM	2-22	0	1.1	-10	65	8	220-230V/50Hz	E121K46-2995-4958703D
							0	0.5	-10	65	9	24 Vdc	E121K46-2995-495870C2
						1-21	0	1.1	-10	80	8	230V/50Hz	E121K46-495905F4
							0	0.5	-10	80	8	24 Vdc	E121K46-495905C2
	11	36	2.16	2500		2-22	0	2.5	-10	65	8	220-230V/50Hz	E121K45-2995-4958703D
							0	0.7	-10	65	9	24 Vdc	E121K45-2995-495870C2
						1-21	0	0.7	-10	80	8	230V/50Hz	E121K45-495905F4
							0	0.3	-10	80	8	24 Vdc	E121K45-495905C2

ATEX

ATEX

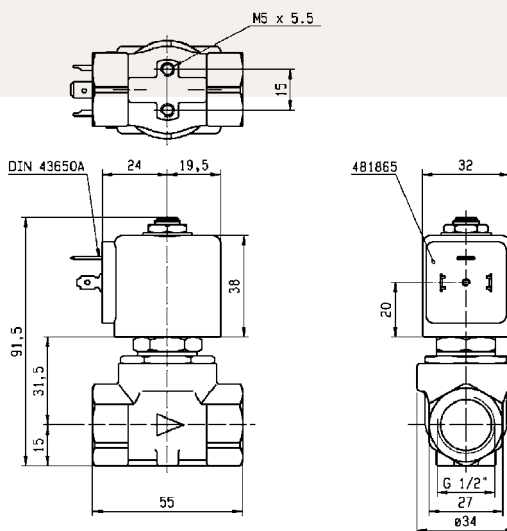

ARA[®]

PNEUMATIK

ul. Wyscigowa 38, 53-012 Wrocław
tel. 71 364 72 82, ara@arapneumatik.pl
www.arapneumatik.pl

