



2/2

VALVES FOR WATER PILOT OPERATED



BRASS PIPE MOUNTING




NORMALLY OPEN

Port size	Orifice Ø	Flow factors			Seat Seal	Atex Zone	Operating Pressure Differential		Fluid Temp.		Power W	Voltage	Solenoid Valve Order Number
		Kv l/min	KV m³/h	Qn l/min			Min bar	Max bar	Min °C	Max °C			
3/8"	13	50	3.00	-	NBR	2-22	0.1	20	-10	50	8	220-230V/50Hz	550192DIS
							0.1	20	-10	50	9	24 Vdc	550191DIS
							0.1	20	-10	80	8	230V/50Hz	550152DIS
							0.1	20	-10	80	8	24 Vdc	550151DIS
1/2"	13	50	3.00	-	NBR	2-22	0.1	20	-10	50	8	220-230V/50Hz	550182DIS
							0.1	20	-10	50	9	24 Vdc	550181DIS
							0.1	20	-10	80	8	230V/50Hz	550142DIS
							0.1	20	-10	80	8	24 Vdc	550141DIS
3/4"	20	140	8.40	-	NBR	2-22	0.1	20	-10	50	8	220-230V/50Hz	550184DIS
							0.1	20	-10	50	9	24 Vdc	550183DIS
							0.1	20	-10	80	8	230V/50Hz	550144DIS
							0.1	20	-10	80	8	24 Vdc	550143DIS
1"	25	160	9.60	-	NBR	2-22	0.1	20	-10	50	8	220-230V/50Hz	550186DIS
							0.1	20	-10	50	9	24 Vdc	550185DIS
							0.1	20	-10	80	8	230V/50Hz	550146DIS
							0.1	20	-10	80	8	24 Vdc	550145DIS


ATEX ATEX ATEX ATEX

2 WAY VALVES

Water

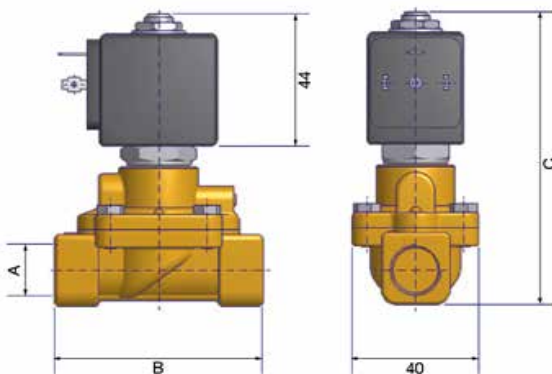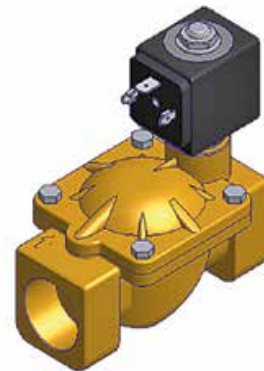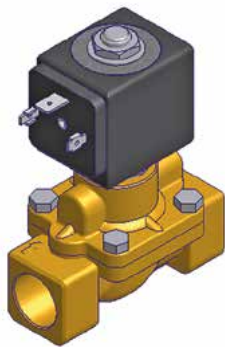



A	B	C
G	mm	mm
3/8"	69	99.5
1/2"	72	101.5

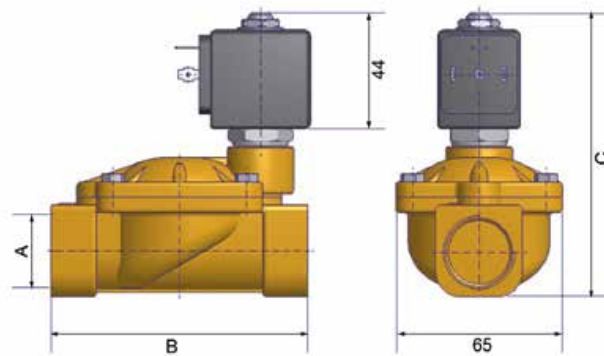

A	B	C
G	mm	mm
3/4"	100	107
1"	104	112.5

2/2

VALVES FOR WATER PILOT OPERATED



BRASS PIPE MOUNTING



NORMALLY OPEN

Port size	Orifice Ø	Flow factors			Seat Seal	Atex Zone	Operating Pressure Differential		Fluid Temp.		Power W	Voltage	Solenoid Valve Order Number
		Kv l/min	KV m³/h	Qn l/min			Min bar	Max bar	Min °C	Max °C			
1 1/2"	40	500	30.00	-	NBR	2-22	0.1	10	-10	50	8	220-230V/50Hz	550188DIS
							0.1	10	-10	50	9	24 Vdc	550187DIS
						1-21	0.1	10	-10	80	8	230V/50Hz	550148DIS
							0.1	10	-10	80	8	24 Vdc	550147DIS
2"	50	620	37.20	-	NBR	2-22	0.1	10	-10	50	8	220-230V/50Hz	550190DIS
							0.1	10	-10	50	9	24 Vdc	550189DIS
						1-21	0.1	10	-10	80	8	230V/50Hz	550150DIS
							0.1	10	-10	80	8	24 Vdc	550149DIS

ATEX
ATEX

2 WAY VALVES

Water

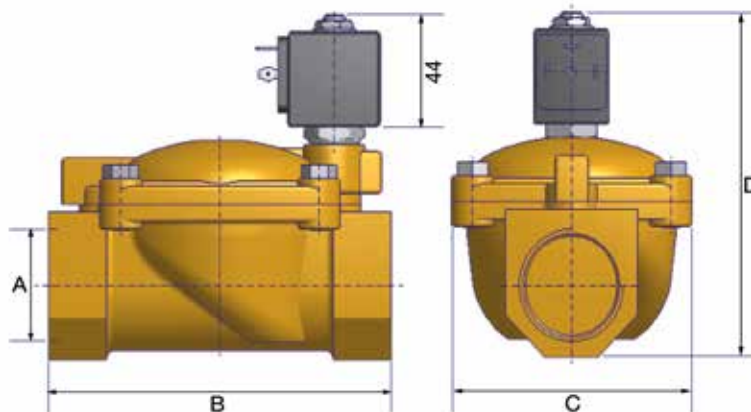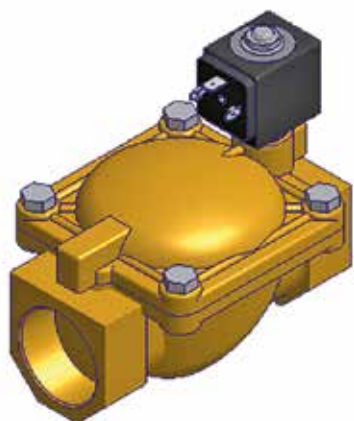

A	B	C	D
G	mm	mm	mm
1 1/2"	145	102	134
2"	173	118	148



ARA[®]

PNEUMATIK

53-012 Wrocław tel. 71 364 72 82
ul. Wyścigowa 38 fax 71 364 72 83

www.arapneumatik.pl

