



Filter silencer G1/2

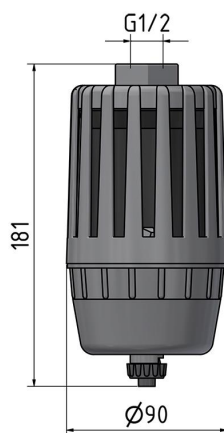

Symbol



Article type	Flow	Weight (kg)
FSD.33-N	None l/min	0,4505

Technical data

Connection:
G 1/2

Installation position:
Vertical, connection thread at top

Input pressure P1 max.:
16 bar

Temperature area:
-10 °C - +80 °C


Filter fineness:
0,01 µm

Condensate drain:
Manual drain (MAN)


Residual oil content:
1 mg/m³

Dust separation:
> 0,01 µm 99,999%

Filter silencer G 3/4

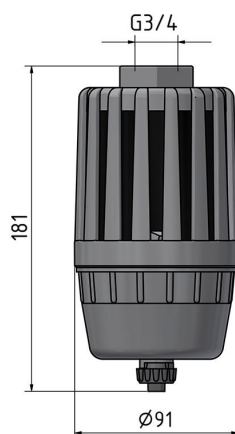

Symbol

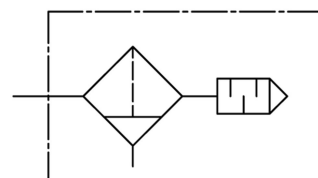

Article type	Flow	Weight (kg)
FSD.34-N	None l/min	1,3971

Technical data

Connection:
G 3/4

Installation position:
Vertical, connection thread at top

Input pressure P1 max.:
16 bar

Temperature area:
-10 °C - +80 °C

Filter fineness:
0,01 µm

Condensate drain:
Manual drain (MAN)

Residual oil content:
1 mg/m³

Dust separation:
> 0,01 µm 99,999%