

LF 3600 Push-In Fittings Range

Stud Fittings

Straights



Elbows



Tees



Banjo



Tube-to-Tube Fittings

Straight



Elbow



Tee



Bulkhead Connector Fittings

Straights



Elbow



Plug-In Accessories



Accessories



LF 3600 Push-In Fittings

In order to meet your **technical and environment requirements**, Parker Legris designed this range of metal fittings, offering **robustness, reliability** and **resistance to industrial fluids** for the most demanding environments.

Product Advantages

High Performance	Resistant up to +150°C at 30 bar Excellent mechanical performance Long threads to resist shock and vibration Excellent abrasion and corrosion resistance due to high phosphorus chemical nickel plating Full flow, minimal pressure drop
Versatility	Materials conform to FDA standards Spring collet gripping system suitable for both metal (grooved) and polymer tubing Excellent resistance to high pressure and vacuum Excellent chemical compatibility More than 250 part numbers One fitting for numerous applications: stock optimisation Manual connection and disconnection Compact and ergonomic
Reliability	High performance brass for increased lifespan 100% leak-tested in production Date coding to guarantee quality and traceability



Food Process
Coffee Machines
In-Plant Automotive
Medical Equipment
Printing
Mining
Welding Robots

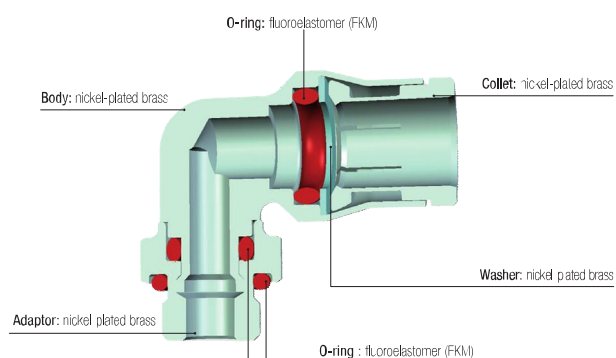
Applications

Technical Characteristics

Suitable Fluids	Compressed air, grease, lubricant, water...						
Working Pressure	Vacuum to 30 bar (20 bar: 3699, 3609)						
Working Temperature	-20°C to +150°C						
Maximum Tightening Torque (daN.m)	Thread						
	M5 x0.8	M6 x1	M8 x1	M10 x1	G1/8	G1/4	G3/8
	0.16	0.18	0.6	0.8	0.8	1.2	3

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.
Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

Component Materials



Silicone-free

Regulations

Industrial
ISO 14743: pneumatic transmissions, push-in fittings, or thermoplastic tubing
DI: 07/23/EC (ATEX)
DI: 2002/95/EC (RoHS), 2011/65/EC
RG: 1907/2006 (REACH)
DI: 04/10/EC (ATEX)
UL94 V-0: plastic components

Food
RG: 2100/EC (FDA)
RG: 1935/2004/EC (minimum flow 0.02 l/h)
USDA NSF H1: process
ASTM B733-04: austenitic (electroless) nickel-phosphorus coating


Stud Fittings

3675

Stud Fitting, Male BSPT Thread

FDA chemical nickel-plated brass,
FKM


	ØD	C		F1	F2	H	kg
4	R1/8	3675 04 10		10	3	15	0.009
	R1/4	3675 04 13		14	3	15	0.017
6	R1/8	3675 06 10		13	4	17	0.011
	R1/4	3675 06 13		14	4	17	0.018
8	R1/8	3675 08 10		15	5	19	0.015
	R1/4	3675 08 13		16	6	18	0.019
	R3/8	3675 08 17		17	6	18.5	0.027
10	R1/4	3675 10 13		18	7	23	0.026
	R3/8	3675 10 17		18	8	22.5	0.031
	R1/2	3675 10 21		22	8	22.5	0.056
12	R1/4	3675 12 13		20	7	25.5	0.033
	R3/8	3675 12 17		20	9	24	0.035
	R1/2	3675 12 21		22	10	23	0.051
14	R3/8	3675 14 17		22	9	27	0.042
	R1/2	3675 14 21		24	11	26	0.057


 FDA chemical nickel-plated brass,
FKM

3601

Stud Fitting, Male BSPP and Metric Thread

FDA chemical nickel-plated brass,
FKM


ØD	C	E	F1	F2	H	kg
4	M5x0.8 3601 04 19	3.5	10	2.5	15.5	0.006
	M6x1 3601 04 52	4.5	10	3	16	0.006
	M8x1 3601 04 56	5	11	3	14.5	0.007
	G1/8 3601 04 10	5.5	13	3	14.5	0.009
	G1/4 3601 04 13	6.5	16	3	14.5	0.015
6	M5x0.8 3601 06 19	3.5	13	2.5	19	0.010
	M10x1 3601 06 60	5.5	13	4	17.5	0.011
	G1/8 3601 06 10	5.5	13	4	17.5	0.011
	G1/4 3601 06 13	6.5	16	4	17	0.015
	G1/8 3601 08 10	5.5	16	5	20	0.014
8	G1/4 3601 08 13	6.5	16	6	18	0.016
	G3/8 3601 08 17	7.5	20	6	19	0.028
	G1/4 3601 10 13	6.5	18	7	25	0.025
10	G3/8 3601 10 17	7.5	20	8	22.5	0.028
	G1/2 3601 10 21	9	24	8	22.5	0.043
	G1/4 3601 12 13	6.5	20	7	26.5	0.030
12	G3/8 3601 12 17	7.5	20	9	26	0.034
	G1/2 3601 12 21	9	24	10	23.5	0.042
14	G3/8 3601 14 17	7.5	22	9	28	0.038
	G1/2 3601 14 21	9	24	11	26.5	0.045



 FDA chemical nickel-plated brass,
FKM


LF 3600

3681

Stud Fitting with Internal Hexagon, Male Metric Thread

		FDA chemical nickel-plated brass, FKM								
		ØD	C	E	F	G	H	kg		
		4	M5x0.8	3681 04 19	3.5	2.5	10	16	0.005	


 FDA chemical nickel-plated brass,
FKM


Related Products

- Polyurethane Tubing
- Polyamide Tubing
- Polyethylene Tubing
- Fluoropolymer Tubing
- Anti-Spark Tubing
- Fireproof PA Tubing
- Brass Flow Control Regulators

Stud Fittings

3614 Stud Fitting, Female BSPP and Metric Thread

ØD	C					kg
		E	F	H		
4	M5x0.8	5	10	22		0.009
	G1/8	7.5	14	25		0.016
	G1/4	11	17	29		0.026
6	G1/8	7.5	14	27.5		0.019
	G1/4	11	17	31.5		0.028
8	G1/8	9.5	15	28.5		0.022
	G1/4	13.5	17	32.5		0.028
10	G3/8	14	22	38		0.052
12	G3/8	14	22	39		0.055
	G1/2	18.5	24	43.5		0.062

3621 Stud Standpipe, Male BSPT Thread

ØD	C	F	H	H1	kg
4	R1/8	10	21	7	0.006
	R1/4	14	21	7	0.014
6	R1/8	10	23.5	6.5	0.008
	R1/4	14	23.5	6.5	0.016
8	R1/8	10	24	6.5	0.009
	R1/4	14	24	6.5	0.017
10	R1/4	14	22	6.5	0.018
	R3/8	17	30	7.5	0.022
12	R3/8	17	31	7.5	0.023
	R1/2	22	31	7.5	0.041
14	R1/2	22	33	8	0.042

3631 Stud Standpipe, Male BSPP and Metric Thread

ØD	C	E	F	H	H1	kg
4	M5x0.8	3.5	13	21.5	7	0.003
	G1/8	5.5	13	20	7	0.007
	G1/4	6.5	8	20	7.5	0.011
6	G1/8	5.5	13	22.5	6.5	0.009
	G1/4	6.5	16	22.5	6.5	0.012
8	G1/8	5.5	13	22.5	6.5	0.010
	G1/4	6.5	16	23	6.5	0.013
10	G3/8	7.5	20	23	7.5	0.018
	G1/4	6.5	16	28	6.5	0.015
12	G3/8	7.5	20	28	7.5	0.022
	G1/2	9	24	28	7.5	0.028
14	G3/8	7.5	20	29	7.5	0.023
	G1/2	9	24	29	7.5	0.033
	G1/2	9	24	31	8	0.033

3600 Cartridge

FDA chemical nickel-plated brass,
FKM

ØD

4

3600 04 00

G

G1

H

H1

H2

N

kg

6

3600 06 00

12.1

10

19

10.5

8.5

13.5

0.009

8

3600 08 00

14.8

13

21

12.5

8.5

16

0.012

10

3600 10 00

17.5

15

24.5

14

10.5

20

0.019

12

3600 12 00

20

17

25

14.5

10.5

22.5

0.023

14

3600 14 00

22

20

28.5

16.5

12

25

0.031

Cavity dimensions available in Chapter 2

Cavity dimensions available in Chapter 2

Stud Fittings

3609 Stud Elbow, Male BSPT Thread

ØD	C		F	G	H	J	L	kg
4	R1/8	3609 04 10	13	10	15	7	18	0.014
	R1/4	3609 04 13	14	10	17	7	18	0.020
6	R1/8	3609 06 10	13	12	17.5	8	21.5	0.018
	R1/4	3609 06 13	14	12	19	8	21.5	0.025
8	R1/8	3609 08 10	13	15	19.5	10	23.5	0.023
	R1/4	3609 08 13	14	15	21	10	23.5	0.029
10	R3/8	3609 08 17	17	15	21	10	23.5	0.035
	R1/4	3609 10 13	15	17.5	23.5	12	29	0.037
12	R3/8	3609 10 17	17	17.5	25.5	12	29	0.043
	R1/4	3609 12 13	15	19.5	26	15	31	0.049
14	R3/8	3609 12 17	17	19.5	28.5	15	31	0.055
	R1/2	3609 12 21	21	19.5	28.5	15	31	0.072
14	R3/8	3609 14 17	19	21.5	29	16	34	0.063
	R1/2	3609 14 21	22	21.5	30	16	34	0.072

The body swivels for positioning purposes.

3629 Extended Stud Elbow, Male BSPT Thread

ØD	C		F	G	H	J	L	kg
4	R1/8	3629 04 10	10	10	24.5	7	18	0.025
	R1/8	3629 06 10	13	12	29.5	8	21.5	0.024
6	R1/4	3629 06 13	14	12	30.5	8	21.5	0.031
	R1/8	3629 08 10	14	15	32.5	10	23.5	0.031
8	R1/4	3629 08 13	14	15	34	10	23.5	0.037
	R1/4	3629 10 13	18	17.5	39	12	29	0.054

The body swivels for positioning purposes.

3699 Compact Elbow, Male BSPP and Metric Thread


ØD	C		E	F	G	H	J	L	kg
4	M5x0.8	3699 04 19	3.5	10	10	18	7	18	0.011
	M6x1	3699 04 52	4.5	10	10	18	7	18	0.011
	M8x1	3699 04 56	5	11	10	18	7	18	0.013
	G1/8	3699 04 10	5.5	13	10	17	7	18	0.014
	G1/4	3699 04 13	6.5	16	10	17.5	7	18	0.019
6	M10x1	3699 06 60	5.5	13	12	19	8	21.5	0.017
	G1/8	3699 06 10	5.5	13	12	19	8	21.5	0.018
	G1/4	3699 06 13	6.5	16	12	19.5	8	21.5	0.022
8	G1/8	3699 08 10	5.5	13	15	20.5	10	23.5	0.021
	G1/4	3699 08 13	6.5	16	15	21.5	10	23.5	0.027
	G3/8	3699 08 17	7.5	20	15	21.5	10	23.5	0.033
10	G1/4	3699 10 13	6.5	16	17.5	27	12	29	0.037
	G3/8	3699 10 17	7.5	20	17.5	25.5	12	29	0.043
	G1/4	3699 12 13	6.5	16	19.5	29.5	15	31	0.050
12	G3/8	3699 12 17	7.5	20	19.5	28.5	15	31	0.057
	G1/2	3699 12 21	9	24	19.5	28.5	15	31	0.085
14	G3/8	3699 14 17	7.5	20	21.5	29	16	34	0.059
	G1/2	3699 14 21	9	24	21.5	29.5	16	34	0.062

The body swivels for positioning purposes.

Stud Fittings

3669


Extended Stud Elbow, Male BSPP and Metric Thread

		FDA chemical nickel-plated brass, FKM				ØD	C	E	F	G	H	J	L	kg
				4	M5x0.8		3669 04 19	3.5	10	10	27.5	7	18	0.014
					G1/8		3669 04 10	5.5	13	10	25.5	7	18	0.017
				6	G1/8		3669 06 10	5.5	13	12	31	8	21.5	0.024
					G1/4		3669 06 13	6.5	16	12	30.5	8	21.5	0.028
				8	G1/8		3669 08 10	5.5	14	15	33.5	10	23.5	0.031
					G1/4		3669 08 13	5.5	16	15	34	10	23.5	0.035
				10	G1/4		3669 10 13	6.5	18	17.5	42	12	29	0.052
					G3/8		3669 10 17	7.5	20	17.5	41	12	29	0.056
				12	G1/4		3669 12 13	6.5	20	19.5	47	15	31	0.070
					G3/8		3669 12 17	7.5	20	19.5	46	15	31	0.072
				14	G1/2		3669 14 21	9	24	21.5	49	16	34	0.094

The body swivels for positioning purposes.

3608

Stud Branch Tee, Male BSPT Thread

FDA chemical nickel-plated brass, FKM

ØD	C	F	G	H	J	L/2	kg
4	R1/8	10	10	24.5	7	18	0.020
	R1/8	13	12	29.5	8	21.5	0.031
6	R1/4	14	12	30.5	8	21.5	0.038
	R1/8	14	15	32.5	10	23.5	0.040
8	R1/4	14	15	34	10	23.5	0.047
	R1/4	18	17.5	39	12	29	0.067
10	R3/8	18	17.5	41	12	29	0.070
	R3/8	20	19.5	46.5	15	31	0.094
12	R3/8	20	19.5	46.5	15	31	0.094
14	R1/2	22	21.5	50.5	16	34	0.125

The body swivels for positioning purposes.



The body swivels for positioning purposes.

3603

Stud Run Tee, Male BSPT Thread

FDA chemical nickel-plated brass,
FKM

ØD	C		F	G	H	H1	J	L	kg
4	R1/8	3603 04 10	10	10	19.5	18	7	23	0.018
6	R1/8	3603 06 10	13	12	23.5	21.5	8	28	0.031
	R1/4	3603 06 13	14	12	24.5	21.5	8	28	0.037
8	R1/8	3603 08 10	14	15	25	23.5	10	31	0.041
	R1/4	3603 08 13	14	15	26.5	23.5	10	31	0.044
10	R1/4	3603 10 13	18	17.5	30.5	29	12	37.5	0.067
	R3/8	3603 10 17	18	17.5	32.5	29	12	37.5	0.069
12	R3/8	3603 12 17	20	19.5	36.5	31	15	40.5	0.103
14	R1/2	3603 14 21	22	21.5	40	34	16	45	0.147

The body swivels for positioning purposes.

The body swivels for positioning purposes.

3698

Stud Branch Tee, Male BSPP and Metric Thread

FDA chemical nickel-plated brass,
FKM


ØD	C	E	F	G	H	J	L/2	kg
4	M5x0.8	3.5	10	10	27.5	7	18	0.018
	G1/8	5.5	13	10	25.5	7	18	0.021
6	G1/8	5.5	13	12	31	8	21.5	0.031
	G1/4	6.5	16	12	30.5	8	21.5	0.035
8	G1/8	5.5	14	15	33.5	10	23.5	0.041
	G1/4	6.5	16	15	34	10	23.5	0.045
10	G1/4	6.5	18	17.5	42	12	29	0.066
12	G3/8	7.5	20	19.5	46	15	31	0.088
14	G1/2	9	24	21.5	49	16	34	0.111

The body swivels for positioning purposes.

The body swivels for positioning purposes.

Stud Fittings

3693 Stud Run Tee, Male BSPP and Metric Thread

FDA chemical nickel-plated brass, FKM


ØD	C	E	F	G	H	H1	J	L	kg
4	M5x0.8	3.5	10	10	22.5	18	7	23	0.019
	G1/8	5.5	13	10	20.5	18	7	23	0.021
6	G1/8	5.5	13	12	25	21.5	8	28	0.031
	G1/4	6.5	16	12	24.5	21.5	8	28	0.035
8	G1/8	5.5	14	15	26.5	23.5	10	31	0.041
	G1/4	6.5	16	15	26.5	23.5	10	31	0.044
10	G1/4	6.5	18	17.5	33	29	12	37.5	0.066
12	G3/8	7.5	20	19.5	36.5	31	15	40.5	0.090
14	G1/2	9	24	21.5	38.5	34	16	45	0.112

The body swivels for positioning purposes.

3618 Single Banjo, Male BSPP and Metric Thread




FDA chemical nickel-plated brass, FKM



ØD	C	F	H	H1	J	L1	L2	kg
4	M5x0.8 3618 04 19	8	14.5	6.5	10	6	18.5	0.011
	G1/8 3618 04 10	14	23	9.5	17	10	20.5	0.029
6	M5x0.8 3618 06 19	8	15	7	10	6	22.5	0.015
	G1/8 3618 06 10	14	23	9.5	17	10	23.5	0.031
8	G1/4 3618 06 13	17	22	9	22	13	25.5	0.049
	G1/8 3618 08 10	14	23	9.5	17	10	26	0.033
10	G1/4 3618 08 13	17	22	9	22	13	27.5	0.051
	G3/8 3618 10 17	22	33	14	22	13	32	0.105

Maximum temperature: +80°C


LF 3600

Each model has been designed to meet specific requirements: compactness due to small overall dimensions, with inter-connectability for customised configurations.




Tube-to-Tube Fittings


3606 Equal Tube-to-Tube Connector

		FDA chemical nickel-plated brass, FKM						
				ØD	G	L	kg	
				4	3606 04 00	10	30.5	0.010
				6	3606 06 00	12	36.5	0.016
				8	3606 08 00	15	37.5	0.021
				10	3606 10 00	17.5	47.5	0.034
				12	3606 12 00	19.5	50	0.042
				14	3606 14 00	21.5	52.5	0.050

3602 Equal Elbow


		FDA chemical nickel-plated brass, FKM					
		ØD			G	L	kg
		4	3602 04 00	10	23	0.010	
		6	3602 06 00	12	28	0.016	
		8	3602 08 00	15	31	0.023	
		10	3602 10 00	17.5	37.5	0.033	
		12	3602 12 00	19.5	40.5	0.045	
		14	3602 14 00	21.5	45	0.056	

3604 Equal Tee

	FDA chemical nickel-plated brass, FKM							
			ØD	G	H	L/2	kg	
			4	3604 04 00	10	23	18	0.014
			6	3604 06 00	12	28	21.5	0.023
			8	3604 08 00	15	31	23.5	0.032
			10	3604 10 00	17.5	37.5	29	0.048
			12	3604 12 00	19.5	40.5	31	0.063
			14	3604 14 00	21.5	45	34	0.078

Bulkhead Connector Fittings


3616 Equal Bulkhead Connector

FDA chemical nickel-plated brass, FKM

ØD	F1	F2	K	L1	L2	ØT min	kg
4	13	14	14	14	20	12.5	0.018
6	16	17	17.5	17	22	15	0.028
8	18	19	19.5	18.5	23.5	17	0.035
10	22	27	24	21.5	26.5	21	0.063
12	24	24	26	23	27	23	0.062
14	27	27	29.5	25.5	29.5	25	0.079

3636 Bulkhead Connector, Female BSPP Thread

FDA chemical nickel-plated brass, FKM

ØD	C	E	F1	F2	H	H1	K	ØT min	kg	
4	G1/8	3636 04 10	8.5	14	14	30.5	11	15	13	0.020
	G1/8	3636 06 10	8.5	17	17	33	11	18.5	15	0.033
6	G1/4	3636 06 13	11.5	17	17	37	15	18.5	15	0.033
	G1/8	3636 08 10	8.5	19	19	34	10.5	21	17	0.044
8	G1/4	3636 08 13	11.5	19	19	38	14.5	21	17	0.044
	G3/8	3636 10 17	12	22	27	42.5	16	24	21	0.073
10	G3/8	3636 12 17	12	24	24	43	16	26	23	0.077
	G1/2	3636 12 21	16	27	24	48.5	21.5	29.5	23	0.133

3639 Equal Bulkhead Elbow

FDA chemical nickel-plated brass,
FKM

ØD		F1	F2	G	H	K	L	ØT min	kg
4	3639 04 00	13	14	10	35	14	18	12.5	0.023
6	3639 06 00	16	17	12	40.5	17.5	21.5	15	0.035
8	3639 08 00	18	19	15	44	19.5	23.5	17	0.046
10	3639 10 00	22	27	17.5	51	24	29	21	0.080
12	3639 12 00	24	24	19.5	55	26	31	23	0.086
14	3639 14 00	27	27	21.5	59	29.5	34	25	0.144

The body swivels for positioning purposes.


Plug-In Accessories

3666 Plug-In Reducer


FDA chemical nickel-plated brass,
FKM

ØD1	ØD2	G	L	L1	L2	kg	
4	6	3666 04 06	10	35	19.5	18	0.008
	8	3666 04 08	10	35.5	20	18	0.009
6	8	3666 06 08	12	38	20	20.5	0.012
	10	3666 06 10	12	43.5	25	21	0.015
8	10	3666 08 10	15	44	25	21.5	0.016
	12	3666 08 12	15	44	26	20.5	0.018
10	12	3666 10 12	17.5	50	26	27	0.026
12	14	3666 12 14	19.5	53	28	28.5	0.032

3667 Plug-In Metric/Inch Adaptor

	FDA chemical nickel-plated brass, FKM		ØD1 ØD2		G		L	L1	L2	kg
			6	1/4	3667 06 56	12.5	38.5	19.5	21	0.012
			10	3/8	3667 10 60	17	49.5	25	27	0.026
			12	1/2	3667 12 62	20	51	26	27.5	0.030

3668 Plug-In Increaser


		FDA chemical nickel-plated brass, FKM										
		ØD1	ØD2					G	L	L1	L2	kg
		6	4	3668 06 04				12	36	17	21.5	0.010

3622 Plug-In Barb Connector

FDA chemical nickel-plated brass

ØD1	ØD2	ØD3	L	L1	L2	kg
4	3.2 3622 04 53	5	40.5	27	22.5	0.003
	5 3622 04 05	7	40.5	27	22.5	0.005
6	5 3622 06 05	7	43	27	22.5	0.006
8	6.3 3622 08 56	8.3	42	25	22.5	0.008
	8 3622 08 08	10	44	27	22.5	0.010
10	6.3 3622 10 56	8.3	47.5	25.5	22.5	0.011
	8 3622 10 08	10	47.5	25.5	22.5	0.011
	8 3622 12 08	10	48.5	25.5	22.5	0.015
12	10 3622 12 10	10	48.5	25.5	22.5	0.014
	12.5 3622 12 62	14.5	57	34	29.5	0.019
14	12.5 3622 14 62	16	57.5	33	29.5	0.023
	14 3622 14 14	16	59.5	35	29.5	0.023

3620 Male Stem Connector

		FDA chemical nickel-plated brass		
		ØD		
		L	L1	kg
4	3620 04 00	31	14	0.002
6	3620 06 00	36.5	17	0.005
8	3620 08 00	37.5	17.5	0.007
10	3620 10 00	47.5	22.5	0.011
12	3620 12 00	49.5	23.5	0.015
14	3620 14 00	53	25	0.016

Plug-In Accessories

3626 Blanking Plug

FDA chemical nickel-plated brass

ØD


		G	L	L1	L2	kg
4	3626 04 00	6	25.5	17.5	11.5	0.004
6	3626 06 00	8	30.5	19.5	13.5	0.009
8	3626 08 00	10	33	20	16	0.009
10	3626 10 00	12	40	25	18	0.015
12	3626 12 00	14	43	26	20	0.021
14	3626 14 00	16	47	28	22.5	0.029

0605 Fluoropolymer Tape

	FKM	kg
		0605 12 12 0.012

Can be used for temperatures from - 250°C to +260°C.
Chemically inert and resistant to gases, acids, solvents, hydrocarbons, oils, alkalines, steam etc.
Non-toxic, waterproof, self-lubricating.
In accordance with CFR21.
Can be used on all materials.
Used to facilitate the preparation of leak-free threaded joints.
Supplied on a reel, length = 12 m; width = 12.7 mm; thickness 0.08 mm.

3000 70 00 Disconnection Tool

	Treated steel					
						
		3000 70 00	H	H1	L	kg
			25	20	96	0.021
For disconnecting LF 3000 [®] fittings/tubing where access is difficult, we recommend the use of this disconnection tool.						

3610 Coloured Release Button Covers

	Anodised aluminium	ØD		kg
		6	3610 06 00 3610 06 04	0.004
		8	3610 08 00 3610 08 04	0.007
		10	3610 10 00 3610 10 04	0.011
		12	3610 12 00 3610 12 04	0.013
		14	3610 14 00 3610 14 04	0.016

Red and green colours are available upon request
Coloured release buttons covers help the identification of circuits and will protect your connections against spark projections.

LF 3600

