

# LIQUIfit® Non-Return Valves

LIQUIfit® non-return valves meet the requirements for conveying **beverages**. They allow flow in one direction and prevent any return flow. Fitted in the circuit, they provide **total protection**.

## Product Advantages

### Suitable for Beverage Applications

Fully compatible for use with water, beverages and liquid food-stuffs (liquids and gas)  
Very low cracking threshold  
Excellent chemical compatibility  
Resistant to cleaning products  
Hygienic design with smooth surfaces  
Fluid direction indicated  
EPDM sealing technology




Water Softeners  
Water Treatment  
Water Purification  
Drinks Dispensers  
Hot & Cold Water Systems

### Applications

## Technical Characteristics

Compatible Fluids	Water, beverages, liquid foodstuffs
Working Pressure	1 to 10 bar
Working Temperature	1°C to +65°C
Cracking Pressure	0.02 bar up to O.D. 3/8" 0.03 bar for O.D. 1/2"

### Component Materials

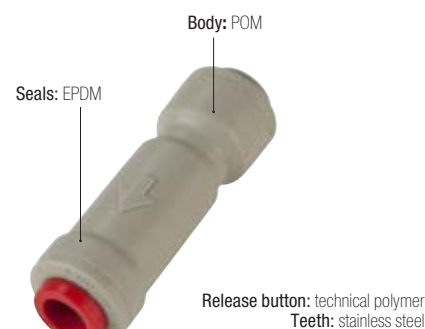

### Silicone-free

### Regulations

DI: 2002/95/EC (RoHS), 2011/65/EC  
FDA: 21 CFR 177.1550  
NSF 51  
RG: 1907/2006 (REACH)

DYSTRYBUTOR PARKER PREMIUM

**ARA**  
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCŁAW  
pneumatyka@arapneumatik.pl  
TEL. 71 364 72 80

PARKER STORE KATOWICE  
katowice@arapneumatik.pl  
TEL. 32 779 76 40


**Parker Store**

# LIQUIfit® Non-Return Valves

## 7992 Single Non-Return Valve



POM, EPDM



ØD		G	L	L1	kg
6	<a href="#">7992 06 00WP2</a>	15.5	45.5	16	0.007
8	<a href="#">7992 08 00WP2</a>	17.5	48.5	17.5	0.010
10	<a href="#">7992 10 00WP2</a>	20	57.5	19	0.014
12	<a href="#">7992 12 00WP2</a>	23.5	67.5	24	0.022