







Ø 16,5 25 40		ZŁĄCZE PROSTE Z GWINTEM ZEWN. BSP						
		Transair®	ØD	C	E	ØG	H	Kg
Ø 50 63		6605 17 13	16,5	R1/4	9,5	34	62,5	0,100
		6605 17 21	16,5	R1/2	12	34	65	0,110
		6605 25 21	25	R1/2	15	44,5	70	0,166
		6605 25 27	25	R3/4	16	44,5	71	0,176
		6605 25 34	25	R1"	16	44,5	71	0,230
		6605 40 34	40	R1"	16	67	111	0,585
		6605 40 42	40	R1"1/4	19,5	67	111	0,510
		6605 40 49	40	R1"1/2	24,5	67	115	0,625
		6605 50 49	50	R1"1/2	22,6	80	119	1,039
		6605 50 48	50	R2"	26,9	80	125	1,022
6605 63 48	63	R2"	26,9	91	118,5	1,095		
6605 63 47	63	R2"1/2	31,5	91	130,5	1,474		

Ø 25 40 50		ZŁĄCZE PROSTE Z GWINTEM ZEWN. BSP I PŁYTA MOCUJ.								
		Transair®	ØD	C	Hex	L	M	N	Z	Kg
Ø 25 40 50		6615 25 21	25	R1/2	27	87	87	102	60	0,460
		6615 25 27	25	R3/4	27	87	87	102	60	0,480
		6615 25 34	25	R1"	34	91	87	102	64	0,570
		6615 40 42	40	R1"1/4	50	121	105	120	75	0,985
		6615 40 49	40	R1"1/2	50	121	105	120	75	1,098
		6615 50 49	50	R1"1/2	50	127	116,5	132	67	1,316
		6615 50 48	50	R2"	60	131	116,5	132	71	1,331

Ø 16,5 25 40 50 63		NAKRĘTKA Z GWINTEM BSP					
		Transair®	ØD	C	Hex	L	Kg
Ø 16,5 25 40 50 63		6611 17 21	16,5	R1/2	23	41	0,150
		6611 25 21	25	R1/2	27	43	0,172
		6611 25 27	25	R3/4	27	45	0,210
		6611 25 34	25	R1"	36	49	0,250
		6611 40 34	40	R1"	41	53	0,410
		6611 40 42	40	R1"1/4	50	61	0,480
		6611 40 49	40	R1"1/2	50	61	0,500
		6611 40 48	40	R2"	60	65	0,620
		6611 50 49	50	R1"1/2	50	79	0,724
		6611 50 48	50	R2"	60	85	0,788
		6611 63 48	63	R2"	70	82	0,900
		6611 63 47	63	R2"1/2	80	86	1,200

Nakrętka 6611 może być użyta w zastępstwie zwykłej nakrętki do każdego złącza średnic od 16,5 mm do 63 mm.

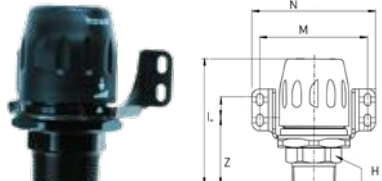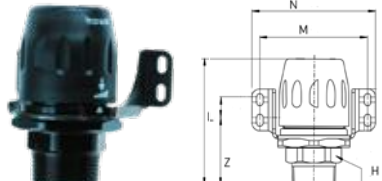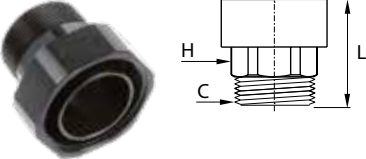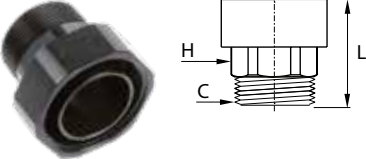