




PL10 Lubricator – Standard



Features

- Stainless Steel Construction Handles Most Corrosive Environments
- 1/8" Female Threaded Drain
- Fillable Under Pressure
- Meets NACE Specifications MR-01-75/ISO 15156
- High Flow: 1/2" - 100 SCFM[§]

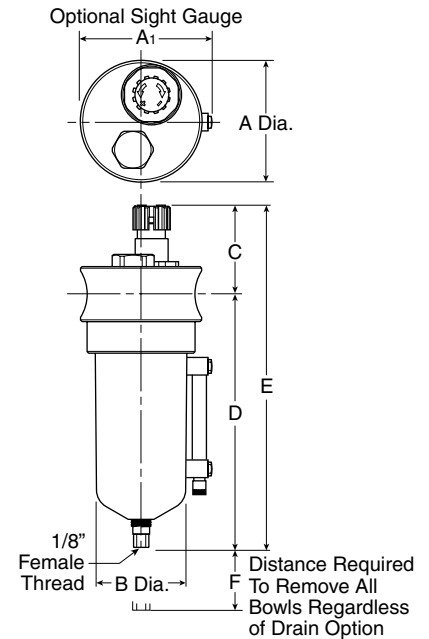

Port Size	NPT	BSPP
	Manual Twist Drain	Manual Twist Drain
1/2"	Metal Bowl With Sight Gauge	
	PL10-04WSS	PL10G04WSS


PL10 Lubricator Dimensions		
A 2.36 (60)	A1 2.52 (64)	B 1.73 (44)
C 2.17 (55)	D 5.46 (139)	E 7.62 (194)
F 3.50 (89)		

inches
(mm)

Standard part numbers shown bold. For other models refer to ordering information below.

§ SCFM = Standard cubic feet per minute at 90 PSIG inlet and 5 PSIG pressure drop.

Ordering Information

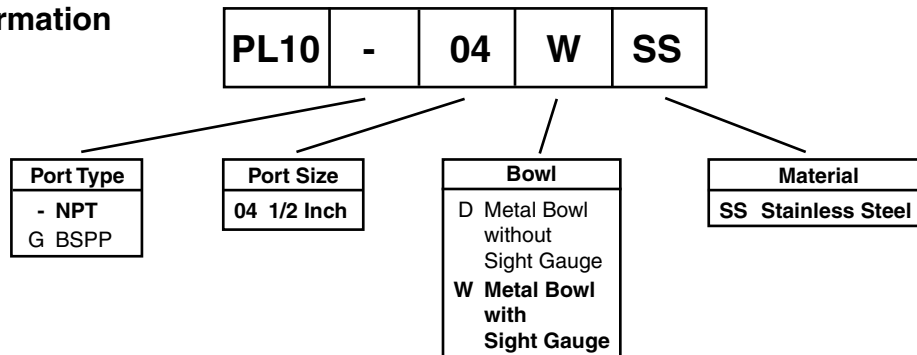

BOLD ITEMS ARE MOST POPULAR.



Parker Dystrybutor:

ARA[®]
PNEUMATIK


53-012 Wrocław tel. 71 364 72 82
 ul. Wyścigowa 38 fax 71 364 72 83

www.arapneumatik.pl






Operation

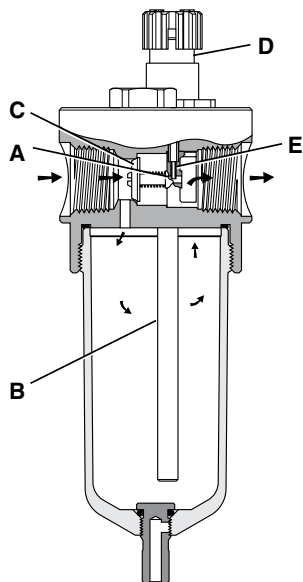

Air flowing through the unit goes through two paths. At low flow rates the majority of the air flows through the Venturi section (A). The rest of the air opens the check valve (C). The velocity of the air flowing through the Venturi section (A) creates a pressure drop. This lower pressure allows the oil to be forced from the reservoir through the pickup tube (B) and travels up to the metering screw (D). The rate of oil delivery is then controlled by adjusting the metering screw (D). Oil flows past the metering screw (D) and forms a drop in the nozzle tube (E). As the oil drops through the dome (F) and back into the Venturi section (A), it is broken up into fine particles. It is then mixed with the air flowing past the check valve (C) and is carried downstream. As the air flow increases the check valve (C) will open more fully. This additional flow will assure that the oil delivery rate will increase linearly with the increase of air flow.

Technical Information

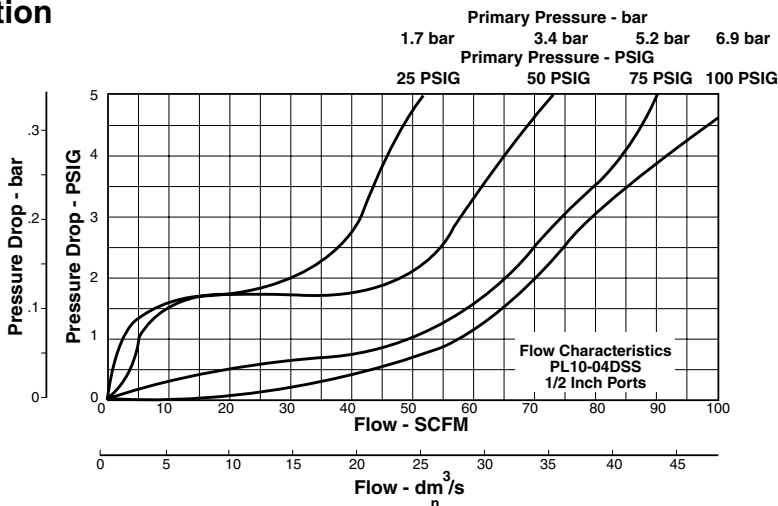

PL10 Filter Kits & Accessories

- Drain Kit –**
 - Manual Twist Drain –
 - Small (Old) SA600Y7-1SS
 - Large (New) SAP05481
- Pipe Nipple –**
 - 1/2" 316 Stainless Steel 616A28-SS
- Sight Dome Kit –**
 - (Old).....RKL10SS
 - (New).....PS740N

Specifications

- Bowl Capacity** 4.0 Ounces
- Port Threads** 1/2 Inch
- Pressure & Temperature Ratings –**
 - Metal Bowl (D) 0 to 300 PSIG (0 to 20.7 bar)
 0°F to 150°F (-18°C to 66°C)
 - Metal Bowl (W) 0 to 250 PSIG (0 to 17.2 bar)
 0°F to 150°F (-18°C to 66°C)

Note: Air must be dry enough to avoid ice formation at temperatures below 32°F (0°C).

Weight 1.9 lb. (0.85 kg)

Materials of Construction

- Body** 316 Stainless Steel
- Bowl** 316 Stainless Steel
- Dip Tube** 316 Stainless Steel
- Drain** 316 Stainless Steel
- Fill Plug** 316 Stainless Steel
- Seals** Fluorocarbon
- Sight Dome** Nylon
- Sight Gauge** Isoplast