

COUPLERS SERIES 26

An evolving offer featuring innovative bi-material design for air applications in standard environments.

Parker Rectus couplers Series 26 feature a new design dedicated to meet trends in pneumatic applications, offering cost-efficient alternatives to the pure metal couplers.

Lightweight with polymer sleeve compared to brass:
Easy to handle.

Corrosion resistance for increased durability and strength:
Extends product life.

Carbon footprint reduction & greener manufacturing:
Meets the growing demand for greener products.

Reduced ecological impact with transitioning to sustainable materials:
Reduction of energy and resource consumption.

Improved aesthetics:
Visual identity of Parker colors.

Comfort of use:
Improved touch sensitivity, grip and comfort of use, in applications where human intervention is frequent.



Couplers series 26 are designed for a wide range of applications, including:

- Industrial machinery
- Pneumatic tools
- Air and gas compressor equipment
- Inflating emergency tents



www.parker.com/LPCE



PARKER PREMIER DYSTRYBUTOR :

ARA[®]
P N E U M A T I K

| arapneumatik.pl

PARKER STORE WROCŁAW
pneumatyka@arapneumatik.pl
TEL. 71 364 72 80
katowice@arapneumatik.pl
TEL. 607 847 647



Technical Characteristics



Compatible Fluids:	Compressed air
Max. Working Pressure:	Up to 35 bar
Working Temperature:	-20°C to +100°C
Flow Rate:	1070 l/mn
Nominal diameter	7,2 (40 mm ²)
Component Materials:	Body, seal and sleeve: Brass, NBR and engineered polymer sleeve



Part Numbers

26KAA Coupler with valve, Male Thread



Brass, NBR



A		HEX	L	L1	D	Kg
G1/4	26KAAW13MPXY	22	39	9	25	0,056
G3/8	26KAAW17MPXY	22	41	9	25	0,058
G1/2	26KAAW21MPXY	22	44	12	25	0,069

26KAI Coupler with valve, Female Thread



Brass, NBR



A		HEX	L	L1	D	Kg
G1/4	26KAIW13MPXY	22	41	9	25	0,071
G3/8	26KAIW17MPXY	22	41	9	25	0,066
G1/2	26KAIW21MPXY	24	44	10	25	0,075


26KAT Coupler with valve, Hose Barb

Brass, NBR



A		HEX	L	L1	D	Kg
6	26KATF06MPXY	21	58	25	25	0,055
8	26KATF08MPXY	21	58	25	25	0,057
9	26KATF09MPXY	21	58	25	25	0,057
10	26KATF10MPXY	21	58	25	25	0,058
13	26KATF13MPXY	21	58	25	25	0,062

Part Number Identification

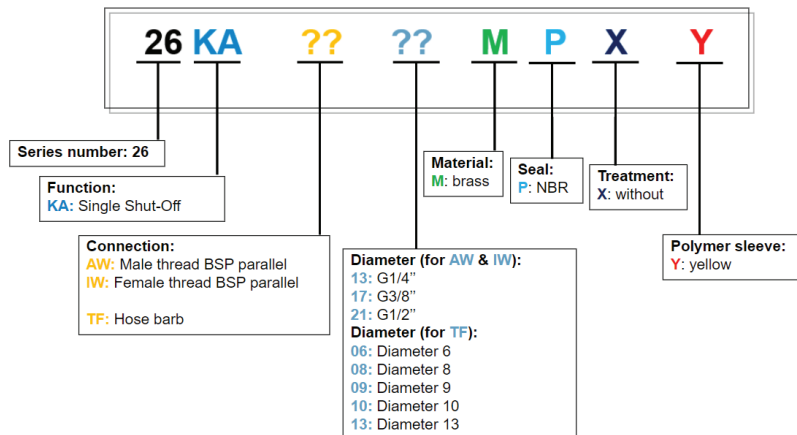

Parker Hannifin Manufacturing France SAS
Low Pressure Connectors Division Europe
 Parc Alcyone - Bâtiment D
 1 rue André et Yvonne Meynier
 35069 Rennes Cedex - France
 phone +33 (0)2 99 25 55 00
www.parker.com/lpce

LEAF/0530/UK January 2025

Your Local Authorized Parker Distributor

© 2025 Parker Hannifin Corporation



PARKER PREMIER DYSTRYBUTOR :

ARA[®]
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCŁAW
pneumatyka@arapneumatik.pl
 TEL. 71 364 72 80
katowice@arapneumatik.pl
 TEL. 607 847 647

