

Solenoid operated directional control valves

Internal supply to solenoid valve(s) via port 1.

Max operating pressure 10 bar, temperature range -10°C to +50°C

3/2 valves, internal air, standard temperature

Symbol	Size	Actuation	Return	Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code Without coil
	G1/8	Air signal	Air signal	1.5	5/5	0.18	P2LAZ311PP
	G1/4			1.5	6/6	0.18	P2LBZ312PP
	G3/8			1.5	8/8	0.36	P2LCZ313PP
	G1/8	Air signal	Spring	3.0	8/15	0.16	P2LAZ311PS
	G1/4			3.0	10/20	0.16	P2LBZ312PS
	G3/8			3.0	10/30	0.35	P2LCZ313PS


5/2 valves, internal air, standard temperature

Symbol	Size	Actuation	Return	Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code Without coil
	G1/8	Air signal	Air signal	1.5	5/5	0.18	P2LAZ511PP
	G1/4			1.5	6/6	0.18	P2LBZ512PP
	G3/8			1.5	8/8	0.36	P2LCZ513PP
	G1/8	Air signal	Spring	3.0	8/15	0.16	P2LAZ511PS
	G1/4			3.0	10/20	0.16	P2LBZ512PS
	G3/8			3.0	10/30	0.35	P2LCZ513PS

Dimensions


P2LAZ 3/2

Air / Air

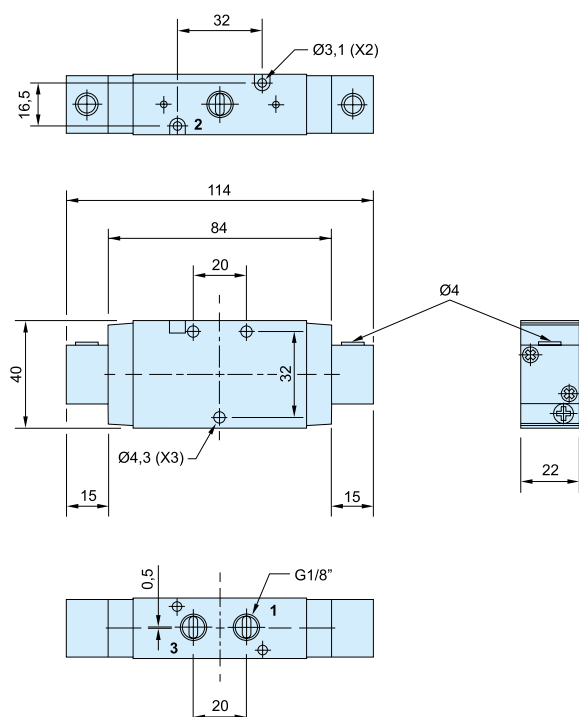

P2LAZ 3/2


Air / Spring

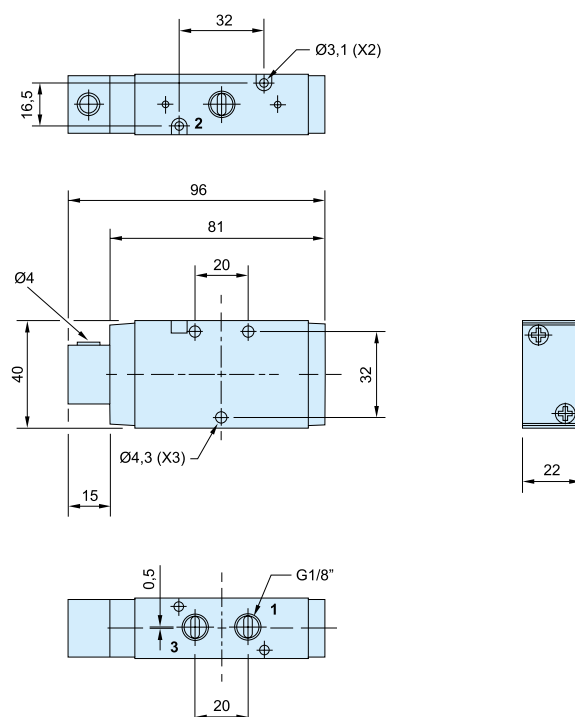

Dimensions


P2LBZ 3/2

Air / Air

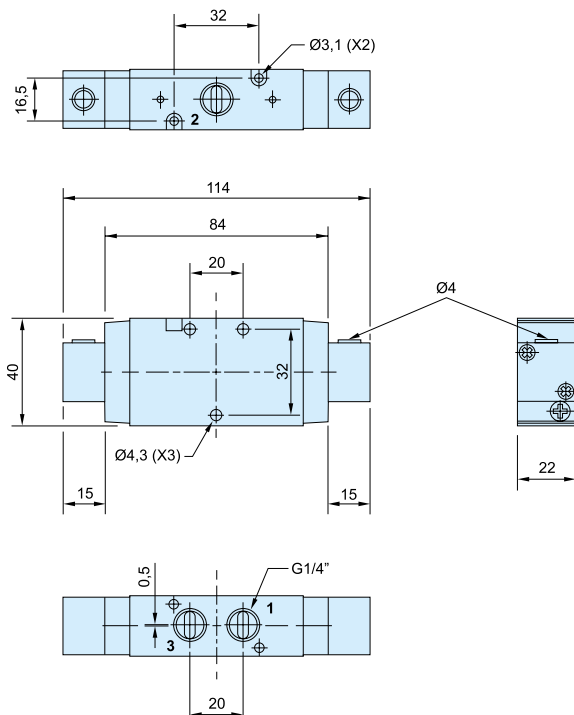


P2LBZ 3/2

Air / Spring

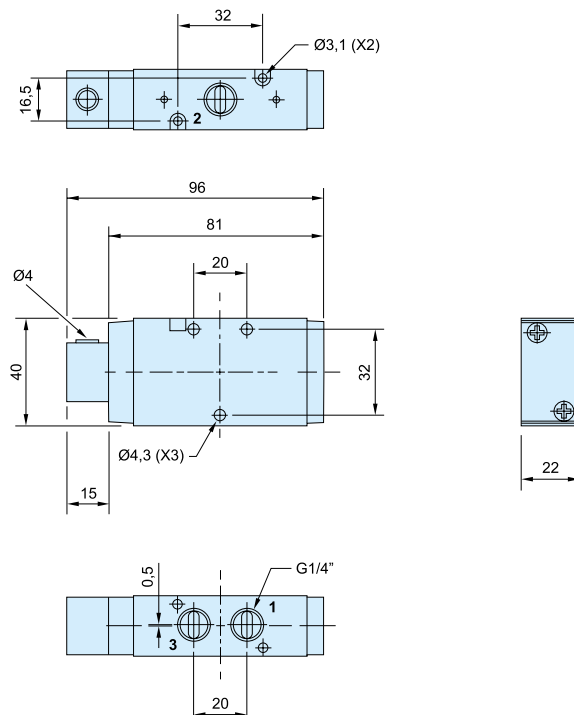

P2LCZ 3/2

Air / Air

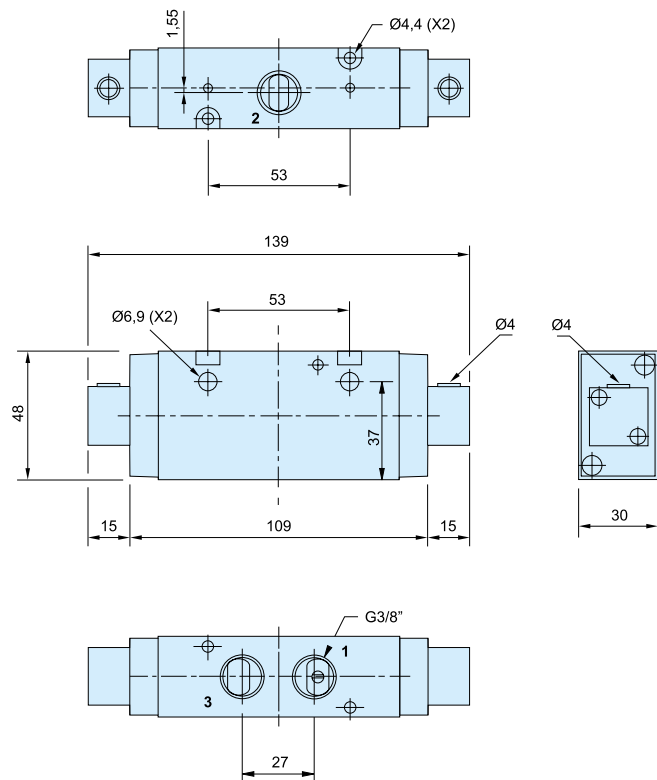

P2LCZ 3/2

Air / Spring

