




aerospace  
 climate control  
 electromechanical  
 filtration  
 fluid & gas handling  
 hydraulics  
**pneumatics**  
 process control  
 sealing & shielding

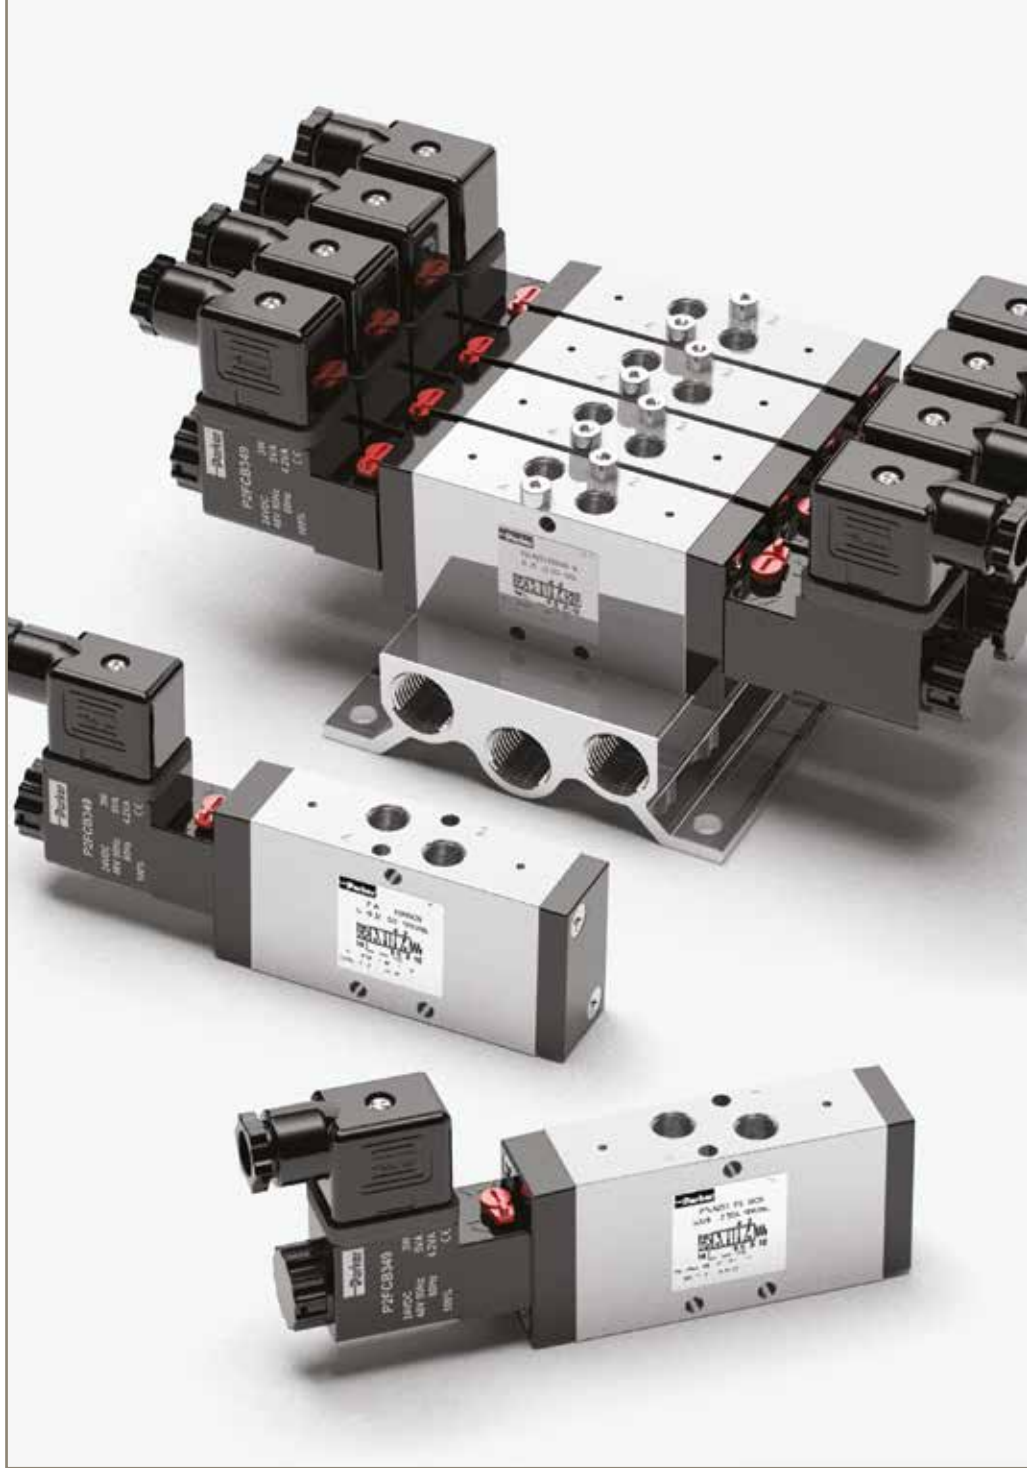

# Pneumatic Valves Viking Lite Series

G1/8 - G3/8 body ported

Catalogue PDE2658TCUK October 2015



ENGINEERING YOUR SUCCESS.

DYSTRYBUTOR PARKER PREMIUM




| arapneumatik.pl

PARKER STORE WROCLAW  
 pneumatyka@arapneumatik.pl  
 TEL. 71 364 72 80


PARKER STORE KATOWICE  
 katowice@arapneumatik.pl  
 TEL. 32 779 76 40




Material Specification.....	3 - 6
Flow Characteristics.....	7
Viking Lite Part Number System.....	8
Main Data Electrically Actuated Directional Control Valves.....	9
Dimensions - P2LAZ / P2LBZ / P2LCZ.....	10 - 15
P2LA, Accessory Order Codes .....	17
P2LB, Accessory Order Codes .....	16 - 18
Manifold Dimensions.....	16 - 18
Solenoid Valves - 22mm.....	19
Solenoid Valves Technical Data - 22mm.....	20
Solenoid Connectors + Cable Plugs.....	20



**Important !**  
 Before carrying out any service work, ensure that the valve and manifold have been vented. Remove the primary supply air hose to ensure total disconnection of the air supply before dismantling valves or blank connection blocks.



**NB !**  
 All technical data in this catalogue is typical only. The air quality is decisive for the valve life: see ISO 8573.



**WARNING**

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.  
 This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

**SALE CONDITIONS**

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).

# Viking Lite ...

robust, versatile high performance  
with long service life

The Viking Lite valve range is robust, versatile and combines high performance with compact installation dimensions. The choice of G1/8, G1/4 or G3/8 port sizes provide large flow capacity, short change-over times for maximum productivity and the low change-over pressure is an important characteristic of this valve range.

Designed to operate with pressures up to 10 bar in temperatures -10°C to + 50°C.

## Wear compensating system

Viking Lite valves are fitted with dynamic bi-directional spool seals suitable for pressures up to 10 bar, in ambient temperatures -10°C to + 50°C. Under pressure radial expansion of the seal occurs to maintain sealing contact with the valve bore.


This sealing method reduces friction gives lower pilot pressures, providing fast response and less wear. Valves do not require lubrication in operation but they can also be installed in systems that are lubricated.

## Viking Lite range

**P2LAZ, G1/8 - Cv = 0.6**

**P2LBZ, G1/4 - Cv = 1.5**

**P2LCZ, G3/8 - Cv = 2.5**

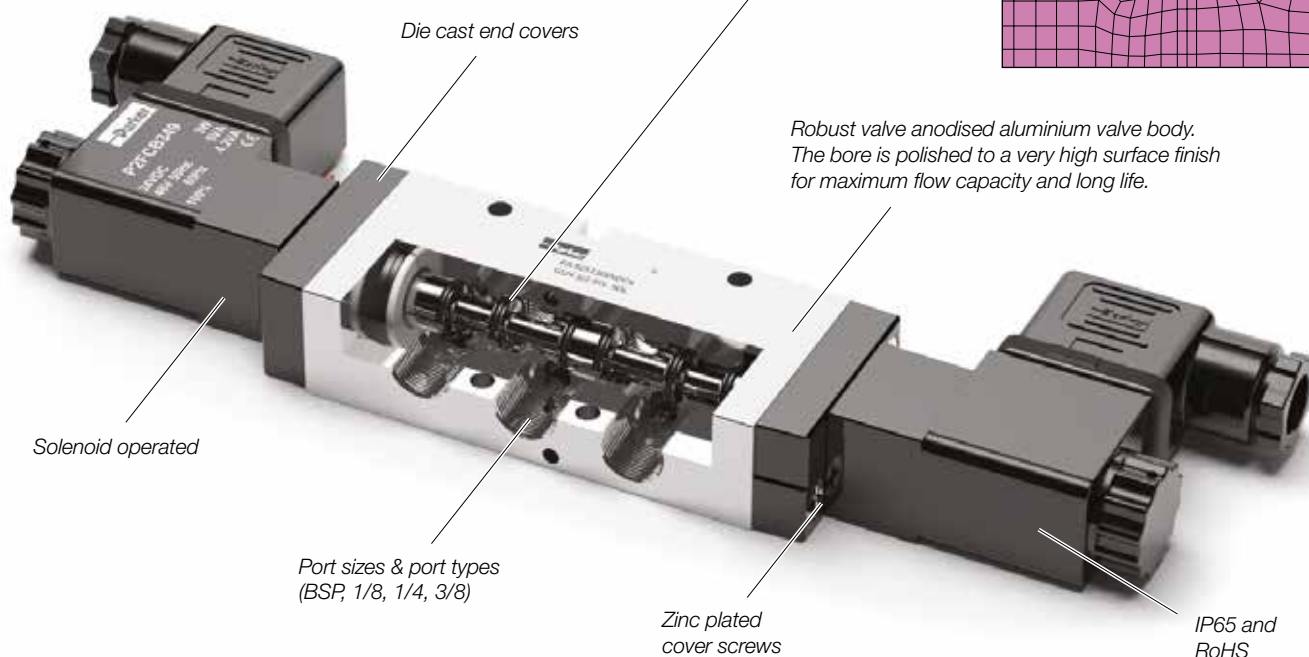

# Viking Lite ...

rust and corrosion resistant,  
high reliability with flexible installation



#### **Rust and corrosion resistant designs.**

Viking Lite valves are made of anodized aluminium, for good corrosion resistance. The smooth design, with no dirt-collecting pockets, makes the valve suitable for most environments.

#### **High reliability**

Viking Lite valves easily comply with the requirements for the component reliability in accordance with EU Machinery Directive standards EN292-2 and EN983. The valves are designed for use with or without supplementary lubrication.

#### **Compact dimensions for flexibility in installations**

Compact dimensions, direct body porting and integral mounting holes are all features of the Viking Lite range.

In addition to single valve installation, the Viking Lite valves may be installed on manifolds so that the valves have a common supply and manifolded exhausts.

#### **Manifold bar installation**

A manifold bar, with common ducts for ports 1, 3 and 5 gives simple, time saving and easily serviced installation. Manifold bars are available in several different sizes, with space for between 2 and 14 valves.

#### **Pressure bar installation**

A pressure bar for common primary air supply gives a simple, robust, time saving and easily serviced installation. When pressure bars are used, restrictor-silencers can be installed in the exhaust ports of each valve, for individual adjustment of cylinder/air motor speed. Pressure bars are available in a number of different sizes, with space ranging from 2 to 10 valves.

#### **Extreme applications**

For extreme applications, -40 degrees and up to 16 bar pressure use

**VikingXtreme valves :**  
see catalogue PDE2569TCUK



**Working medium, air quality**

Working medium: Dry, filtered compressed air to ISO 8573-1 class 3.4.3.

**Recommended air quality for valves**

For best possible service life and trouble free operation, ISO 8573-1 quality class 3.4.3 should be used. This means 5µm filter (standard filter) dew point +3°C for indoor operation (a lower dew point should be selected for outdoor operation) and oil concentration 1.0 mg oil/m<sup>3</sup>, which is what a standard compressor with a standard filter gives.

**ISO 8573-1 quality classes**


Quality class	Pollution		Water max. press. dew point (°C)	Oil max. concentration (mg/m <sup>3</sup> )
	particle size (µm)	max. concentration (mg/m <sup>3</sup> )		
1	0,1	0,1	-70	0,01
2	1	1	-40	0,1
3	5	5	-20	1,0
4	15	8	+3	5,0
5	40	10	+7	25
6	-	-	+10	-

**Typical cylinder speeds which can be achieved with Viking valves and different tube sizes.**

In the chart below you can find the suitable valves, tubes etc. for each cylinder size. If you have a tube length over 2m, choose one tube size larger than in the chart.

Following data is valid:

- Supply pressure : min 7.0 bar
- Regulator pressure setting : 6.0 bar
- Pipe length between air treatment unit and valve : max 1m
- Pipe length between valve and cylinder : max 2m

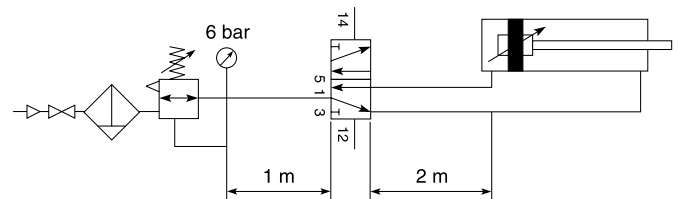

Cylinder bore	<20	20-32	40-50	63	80	100	125
Cylinder port	M5	G1/8	G1/4	G3/8	G3/8	G1/2	G1/2
Tubing Ext/Int	4/2.7	6/4	8/6	10/8	10/8	12/9	14/11
			6/4	8/6	12/9	14/11	
P2LAZ	G1/8	G1/8	G1/8	G1/8	G1/8		
P2LBZ	G1/4	G1/4	G1/4	G1/4	G1/4	G1/4	
P2LCZ			G3/8	G3/8	G3/8	G3/8	G3/8

- Cylinder speed < 0,5 m/s
- Cylinder speed < 1 m/s
- Oversized
- Cylinder speed > 1 m/s

## Material specification

### P2LAZ

#### Valve

Valve body	Anodised aluminium
End covers	Anodised aluminium
Spool	Aluminium
Piston	Acetal plastic/ Anodised aluminium
End cover sealings	Nitrile rubber
End cover screws	Zinc plated steel
Springs	Stainless steel
Mounting screws for solenoid	Stainless steel
Spool seals	Nitrile
Pilot adaptor	Acetal plastic

#### Accessories

Manifold bar	Anodised aluminium
Pressure bar	Anodised aluminium

### P2LCZ

#### Valve

Valve body	Anodised aluminium
End covers	Anodised aluminium
Spool	Aluminium
Piston	Acetal plastic/ Anodised aluminium
End cover sealings	Nitrile rubber
End cover screws	Zinc plated steel
Springs	Stainless steel
Mounting screws for solenoid	Stainless steel
Spool seals	Nitrile
Pilot adaptor	Acetal plastic

### P2LBZ

#### Valve

Valve body	Anodised aluminium
End covers	Anodised aluminium
Spool	Aluminium
Piston	Acetal plastic/ Anodised aluminium
End cover sealings	Nitrile rubber
End cover screws	Zinc plated steel
Springs	Stainless steel
Mounting screws for solenoid	Stainless steel
Spool seals	Nitrile
Pilot adaptor	Acetal plastic

#### Accessories

Manifold bar	Anodised aluminium
Pressure bar	Anodised aluminium


**Flow characteristics**

Flow capacities in accordance with ISO6358

All pressures = effective pressure


The curves in the diagram below are typical only

**Technical Data P2LAZ**

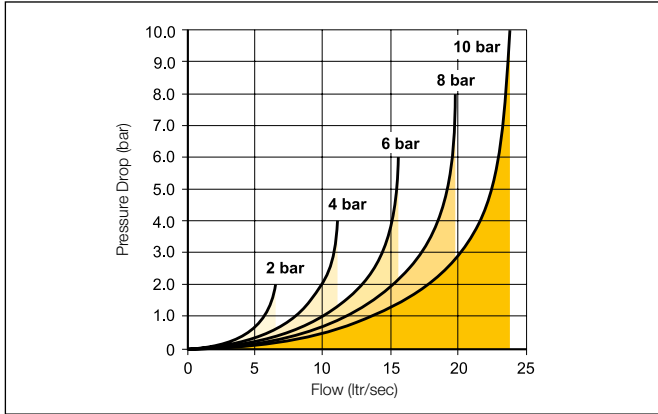


Port size	G1/8
Maximum Operating pressure	10 bar
Working temperature.	-10°C to + 50°C
Flow (acc. to ISO 6358)	c = 2.2 NI/s x bar b = 0.3 Qn = 10.1 l/s Qmax = 15.6 l/s Cv = 0.6

**Technical Data P2LBZ**

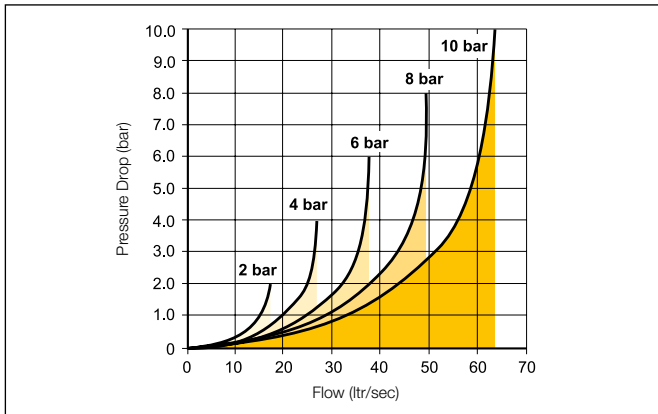


Port size	G1/4
Maximum Operating pressure	10 bar
Working temperature.	-10°C to + 50°C
Flow (acc. to ISO 6358)	c = 5.4 NI/s x bar b = 0.3 Qn = 24.6 l/s Qmax = 37.8 l/s Cv = 1.5

**Technical Data P2LCZ**

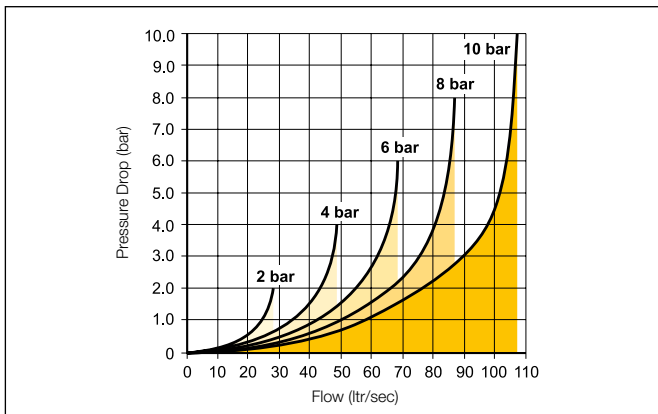

Port size	G3/8
Maximum Operating pressure	10 bar
Working temperature.	-10°C to + 50°C
Flow (acc. to ISO 6358)	c = 9.7 NI/s x bar b = 0.3 Qn = 41.5 l/s Qmax = 68.3 l/s Cv = 2.5

Viking Lite Part Number System

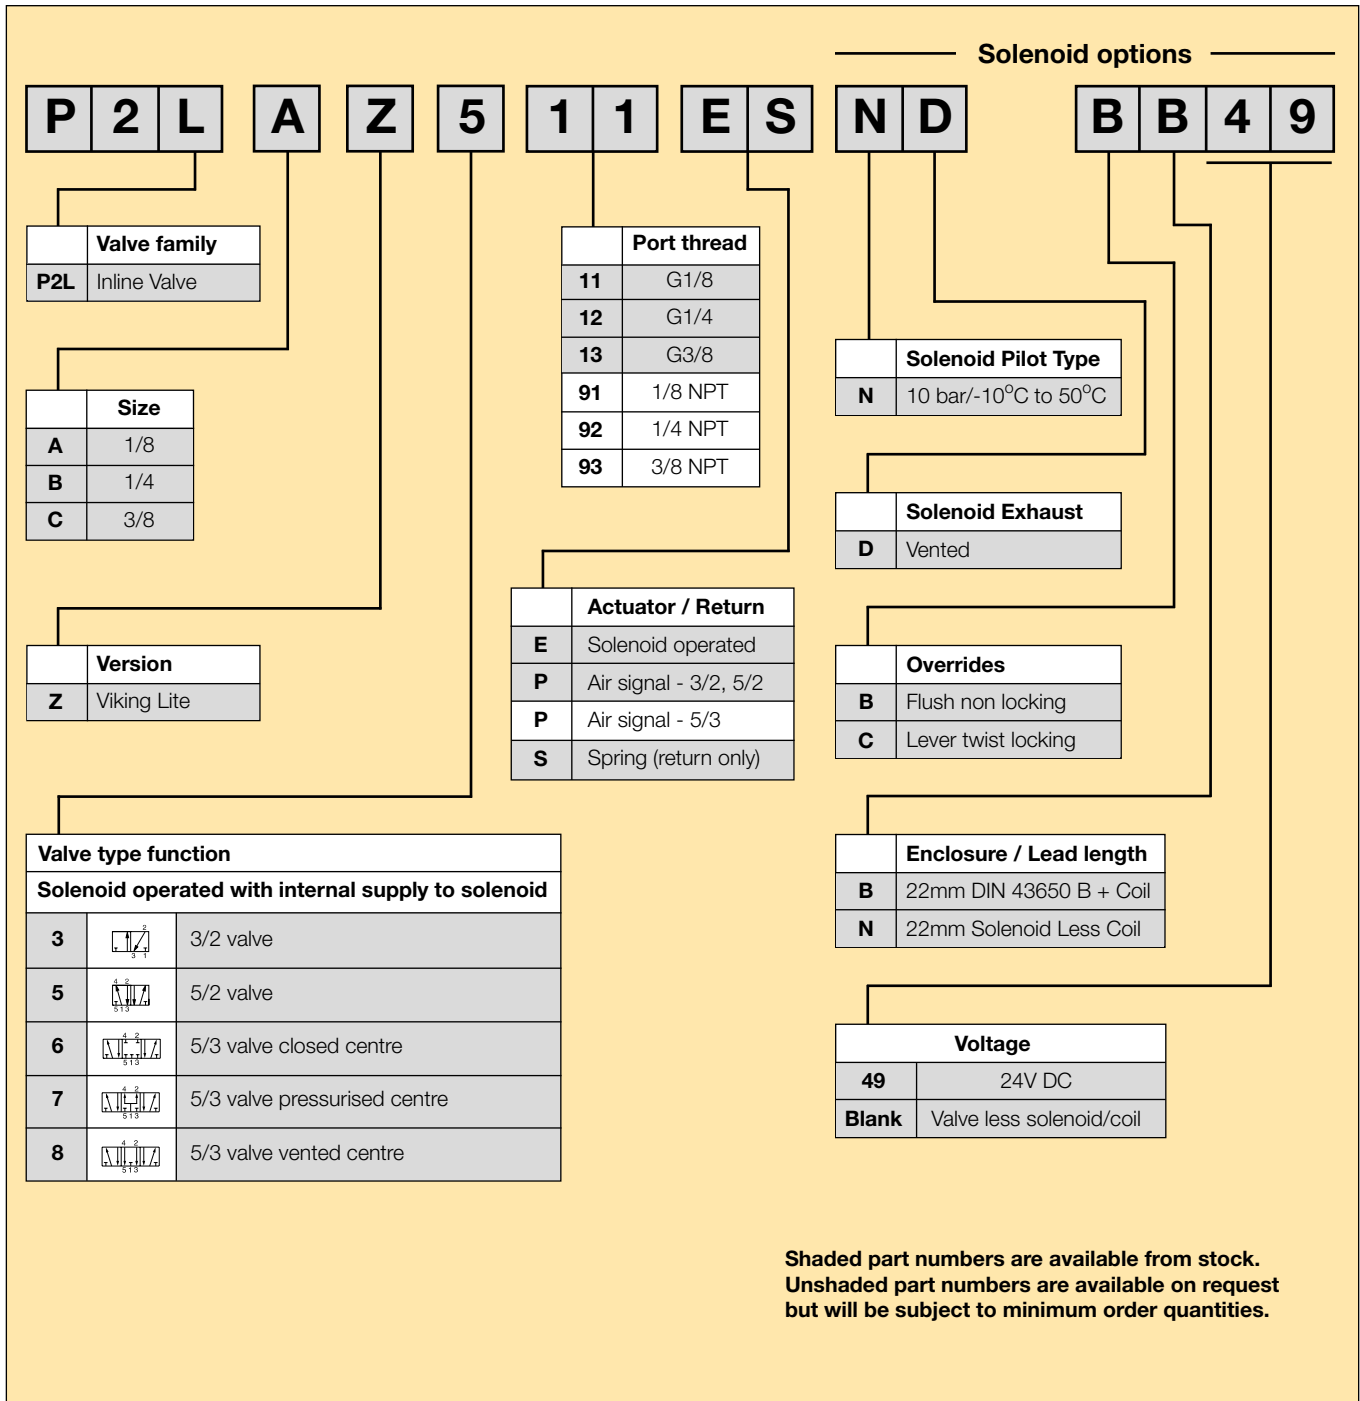



## Solenoid operated directional control valves

Internal supply to solenoid valve(s) via port 1.

Max operating pressure 10 bar, temperature range -10°C to +50°C

## 3/2 valves, internal air, standard temperature

Symbol	Size	Actuation	Return	Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code Without coil	Order code With 24V DC (22mm coil)
	G1/8	Air signal	Air signal	1.5	5/5	0.18	<b>P2LAZ311PP</b>	
	G1/4			1.5	6/6	0.18	<b>P2LBZ312PP</b>	
	G3/8			1.5	8/8	0.36	<b>P2LCZ313PP</b>	
	G1/8	Air signal	Spring	3.0	8/15	0.16	<b>P2LAZ311PS</b>	
	G1/4			3.0	10/20	0.16	<b>P2LBZ312PS</b>	
	G3/8			3.0	10/30	0.35	<b>P2LCZ313PS</b>	
	G1/8	Electric signal	Electric signal	1.5	10/10	0.18	<b>P2LAZ311EENDCN</b>	<b>P2LAZ311EENDCB49</b>
	G1/4			1.5	12/12	0.18	<b>P2LBZ312EENDCN</b>	<b>P2LBZ312EENDCB49</b>
	G3/8			1.5	17/17	0.36	<b>P2LCZ313EENDCN</b>	<b>P2LCZ313EENDCB49</b>
	G1/8	Electric signal	Spring	3.0	15/35	0.16	<b>P2LAZ311ESNDCN</b>	<b>P2LAZ311ESNDCB49</b>
	G1/4			3.0	18/45	0.16	<b>P2LBZ312ESNDCN</b>	<b>P2LBZ312ESNDCB49</b>
	G3/8			3.0	27/75	0.35	<b>P2LCZ313ESNDCN</b>	<b>P2LCZ313ESNDCB49</b>

## 5/2 valves, internal air, standard temperature


Symbol	Size	Actuation	Return	Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code Without coil	Order code With 24V DC (22mm coil)
	G1/8	Air signal	Air signal	1.5	5/5	0.18	<b>P2LAZ511PP</b>	
	G1/4			1.5	6/6	0.18	<b>P2LBZ512PP</b>	
	G3/8			1.5	8/8	0.36	<b>P2LCZ513PP</b>	
	G1/8	Air signal	Spring	3.0	8/15	0.16	<b>P2LAZ511PS</b>	
	G1/4			3.0	10/20	0.16	<b>P2LBZ512PS</b>	
	G3/8			3.0	10/30	0.35	<b>P2LCZ513PS</b>	
	G1/8	Electric signal	Electric signal	1.5	10/10	0.19	<b>P2LAZ511EENDCN</b>	<b>P2LAZ511EENDCB49</b>
	G1/4			1.5	12/12	0.21	<b>P2LBZ512EENDCN</b>	<b>P2LBZ512EENDCB49</b>
	G3/8			1.5	17/17	0.44	<b>P2LCZ513EENDCN</b>	<b>P2LCZ513EENDCB49</b>
	G1/8	Electric signal	Spring	3.0	15/35	0.17	<b>P2LAZ511ESNDCN</b>	<b>P2LAZ511ESNDCB49</b>
	G1/4			3.0	18/45	0.20	<b>P2LBZ512ESNDCN</b>	<b>P2LBZ512ESNDCB49</b>
	G3/8			3.0	27/75	0.43	<b>P2LCZ513ESNDCN</b>	<b>P2LCZ513ESNDCB49</b>

## 5/3 valves, internal air, standard temperature


Symbol	Size	Actuation	Return	Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code Without coil	Order code With 24V DC (22mm coil)
	G1/8	Electric/Electric	Self centring	3.0	18/40	0.26	<b>P2LAZ611EENDCN</b>	<b>P2LAZ611EENDCB49</b>
	G1/4		Closed	3.0	22/55	0.28	<b>P2LBZ612EENDCN</b>	<b>P2LBZ612EENDCB49</b>
	G3/8		Centre	3.0	30/90	0.60	<b>P2LCZ613EENDCN</b>	<b>P2LCZ613EENDCB49</b>
	G1/8	Electric/Electric	Self centring	3.0	18/40	0.26	<b>P2LAZ711EENDCN</b>	<b>P2LAZ711EENDCB49</b>
	G1/4		Presurised	3.0	22/45	0.28	<b>P2LBZ712EENDCN</b>	<b>P2LBZ712EENDCB49</b>
	G3/8		Centre	3.0	30/90	0.60	<b>P2LCZ713EENDCN</b>	<b>P2LCZ713EENDCB49</b>
	G1/8	Electric/Electric	Self centring	3.0	18/40	0.26	<b>P2LAZ811EENDCN</b>	<b>P2LAZ811EENDCB49</b>
	G1/4		Vented	3.0	22/45	0.28	<b>P2LBZ812EENDCN</b>	<b>P2LBZ812EENDCB49</b>
	G3/8		Centre	3.0	30/90	0.60	<b>P2LCZ813EENDCN</b>	<b>P2LCZ813EENDCB49</b>

Dimensions


**P2LAZ 3/2**  
Air / Air

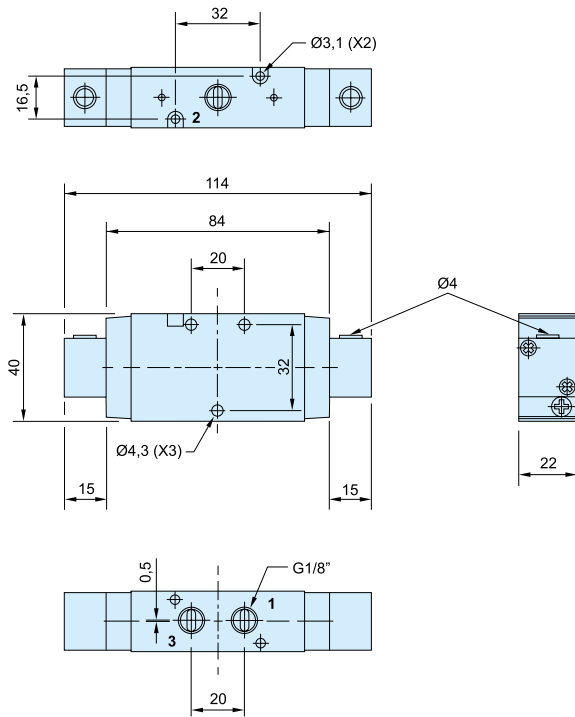


**P2LAZ 3/2**  
Air / Spring

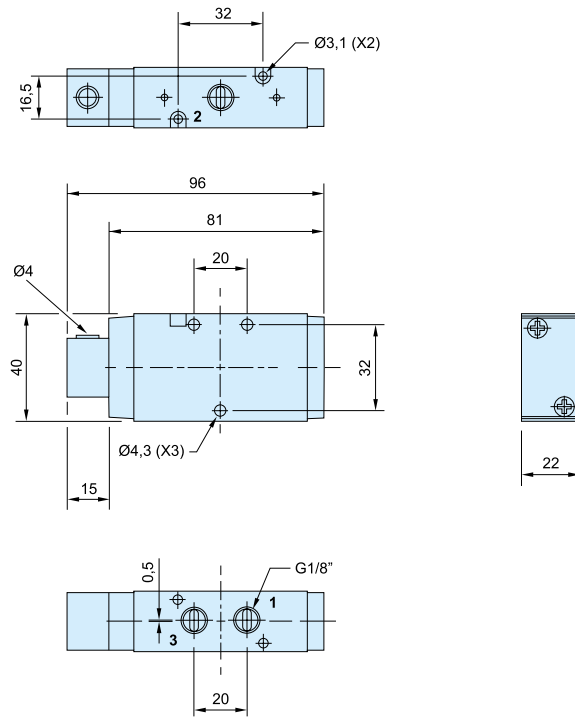

**P2LAZ 3/2**  
Solenoid / Solenoid

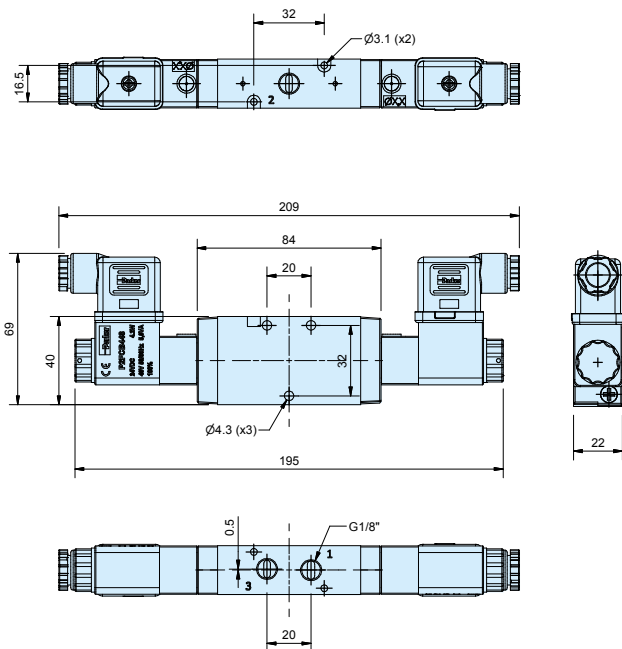

**P2LAZ 3/2**  
Solenoid / Spring

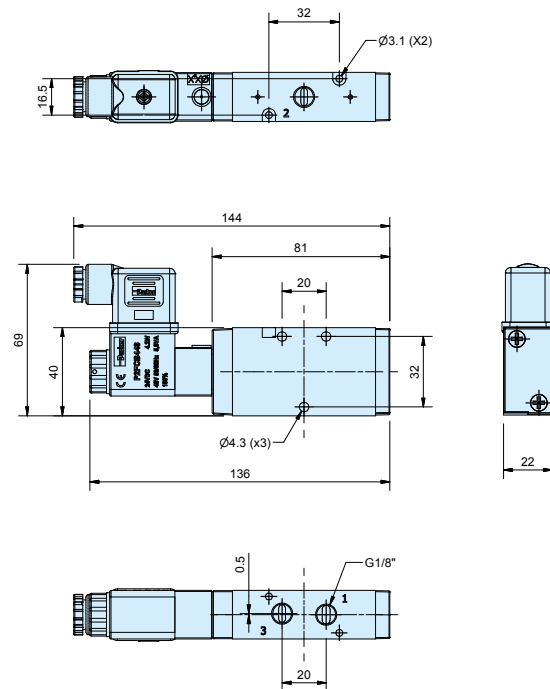


**Solenoid valves**


Solenoid valves and cable plugs must be ordered separately. One pilot valve is required for each E (NDCN only) in the valve order code.

**Dimensions**


**P2LAZ 5/2**  
**Solenoid / Solenoid**

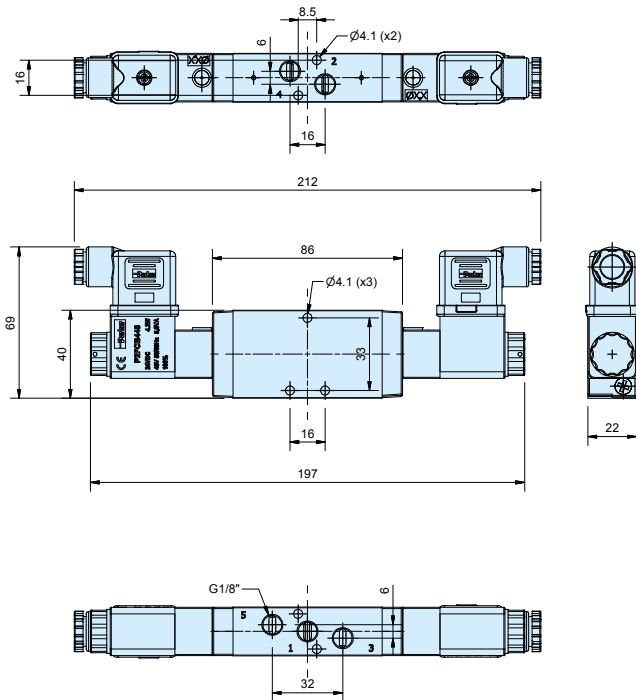

**P2LAZ 5/2**  
**Solenoid / Spring**

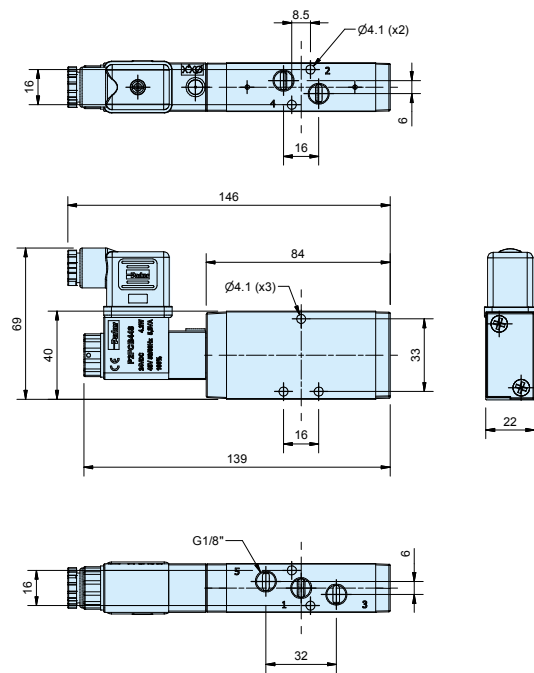


**P2LAZ 5/3**  
**Solenoid / Solenoid**

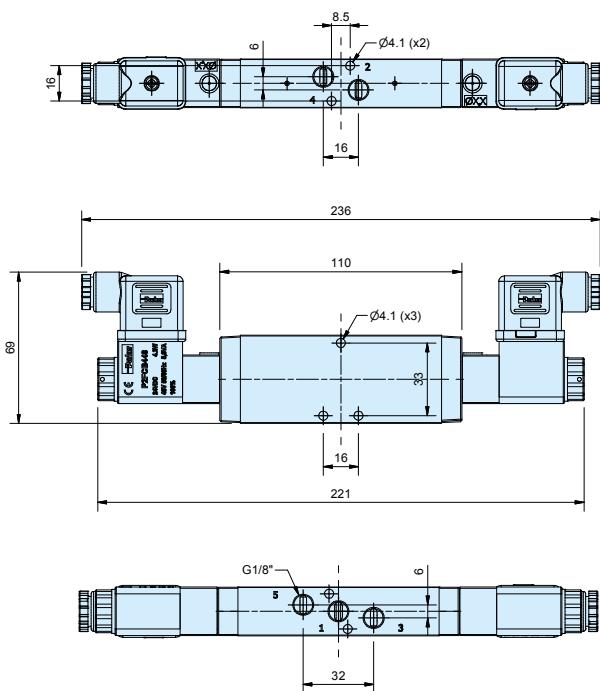


**Solenoid valves**  
 Solenoid valves and cable plugs must be ordered separately.  
 One pilot valve is required for each E (NDCN only) in the valve order code.

**Dimensions**


**P2LBZ 3/2**  
 Air / Air

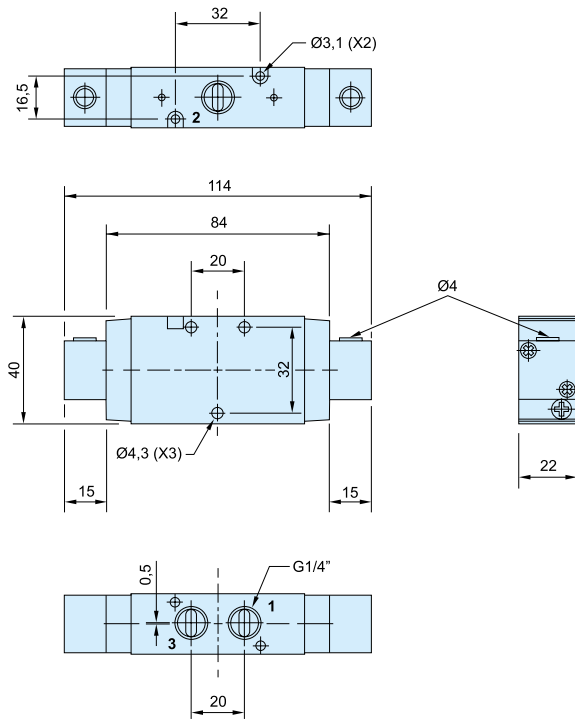


**P2LBZ 3/2**  
 Air / Spring

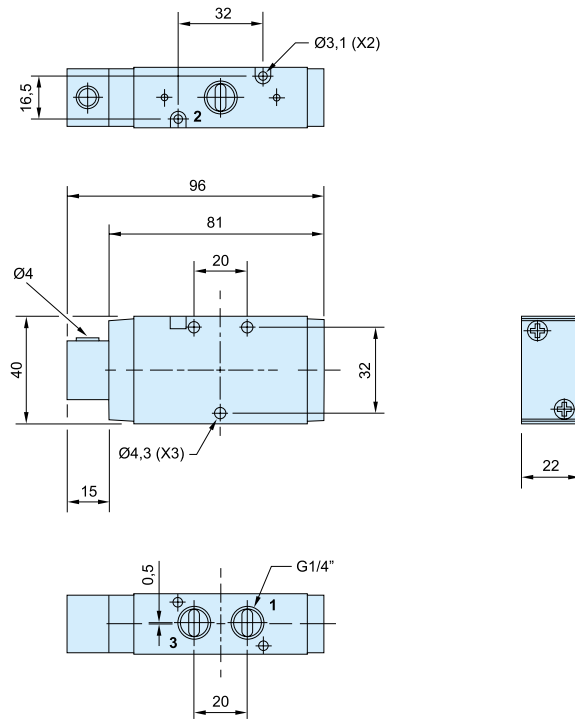

**P2LBZ 3/2**  
 Solenoid / Solenoid

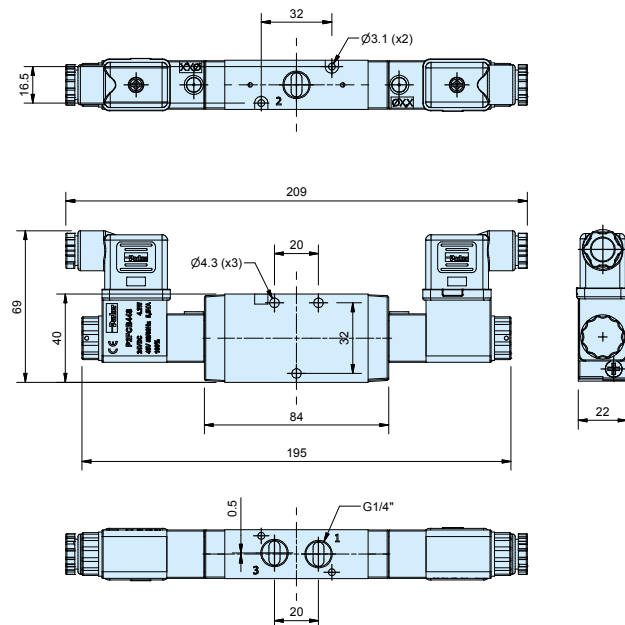

**P2LBZ 3/2**  
 Solenoid / Spring

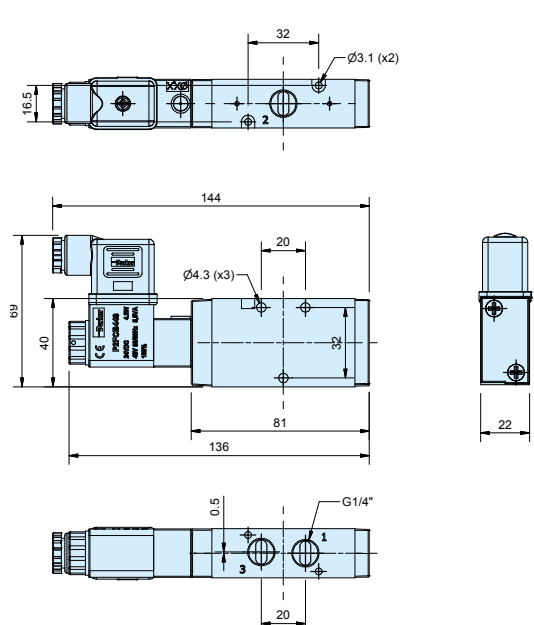


**Solenoid valves**


Solenoid valves and cable plugs must be ordered separately.  
 One pilot valve is required for each E (NDCN only) in the valve order code.

**Dimensions**


**P2LBZ 5/2**  
**Solenoid / Solenoid**

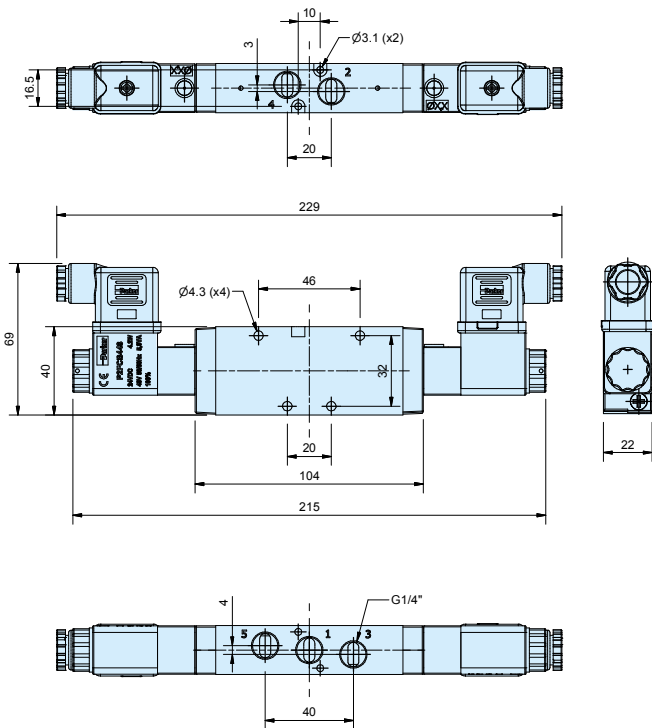

**P2LBZ 5/2**  
**Solenoid / Spring**

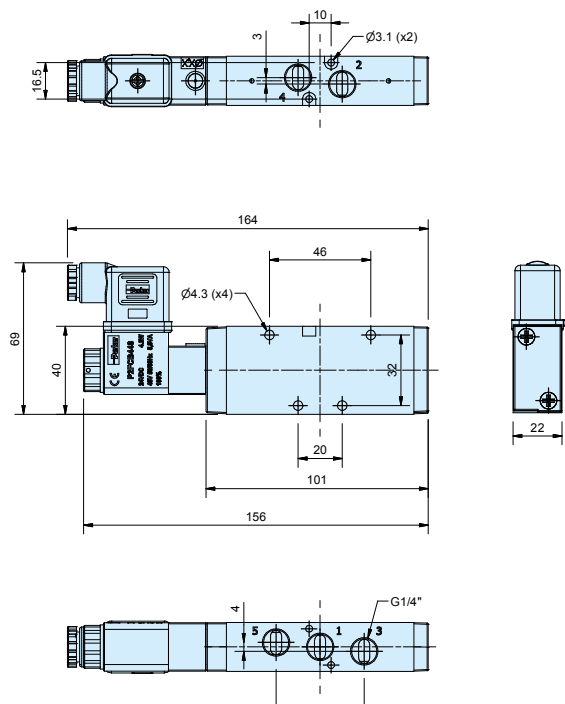


**P2LBZ 5/3**  
**Solenoid / Solenoid**

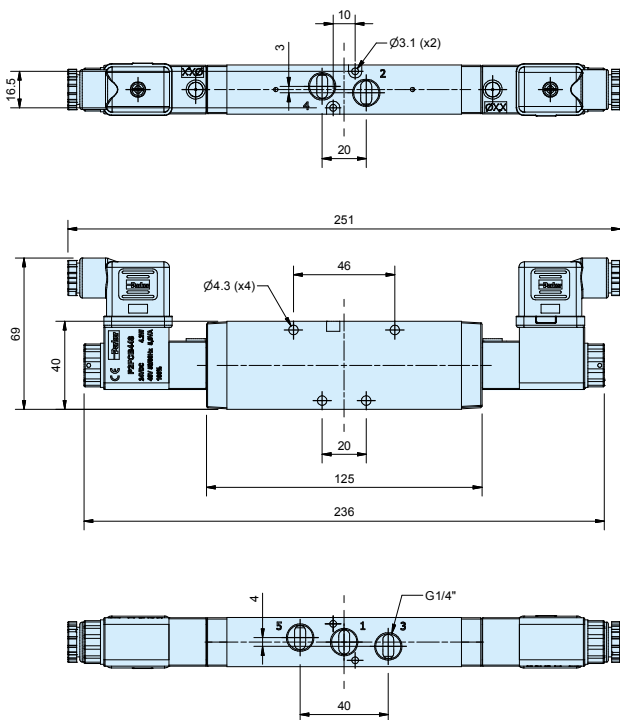


**Solenoid valves**  
 Solenoid valves and cable plugs must be ordered separately.  
 One pilot valve is required for each E (NDCN only) in the valve order code.

**Dimensions**


**P2LCZ 3/2**  
**Air / Air**

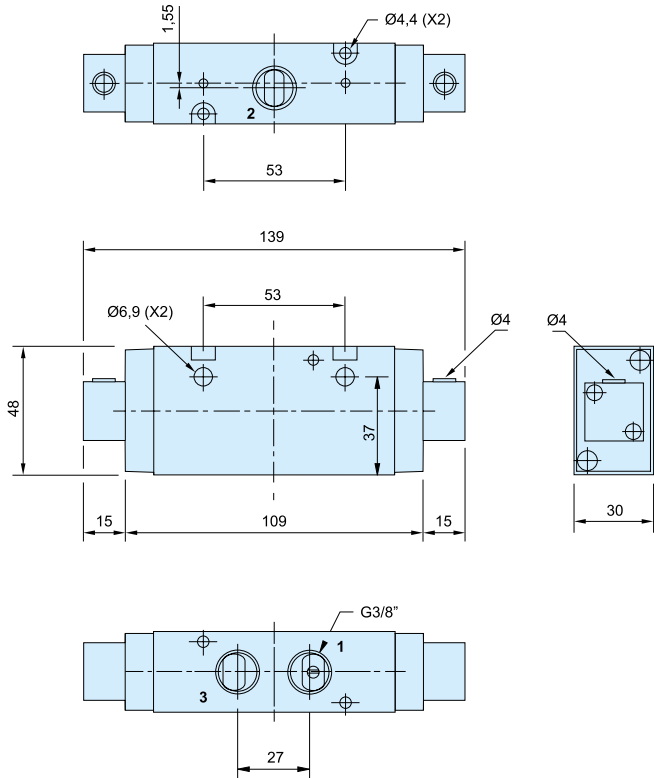


**P2LCZ 3/2**  
**Air / Spring**

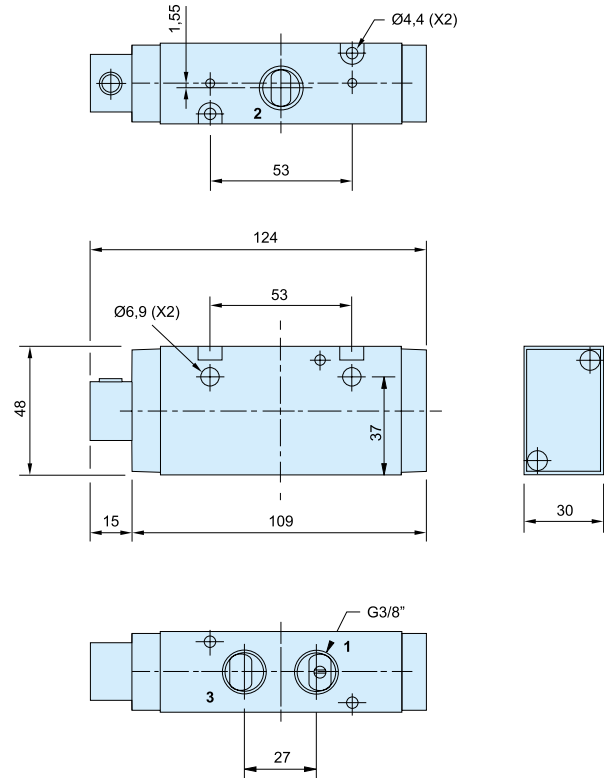

**P2LCZ 3/2**  
**Solenoid / Solenoid**

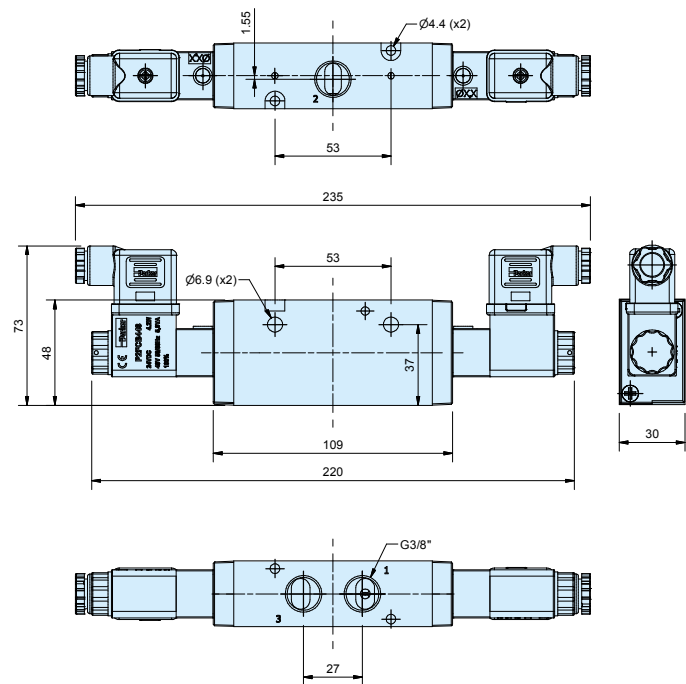


**P2LCZ 3/2**  
**Solenoid / Spring**

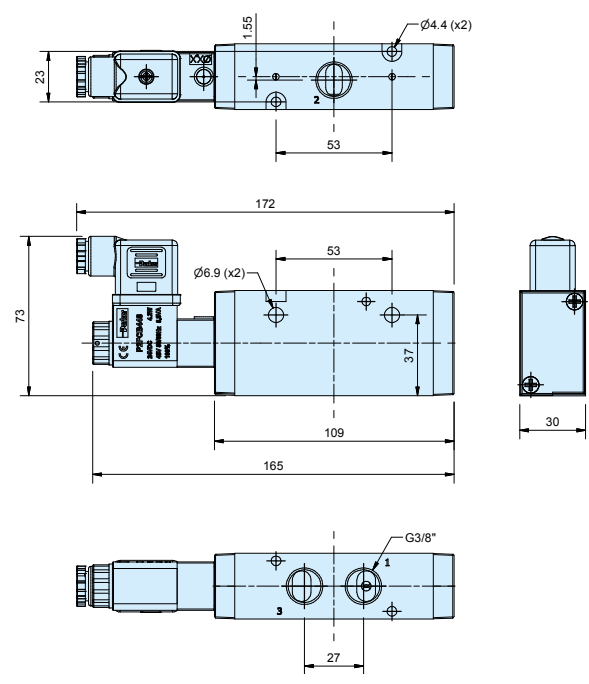

Dimensions


P2LCZ 5/2

Solenoid / Solenoid

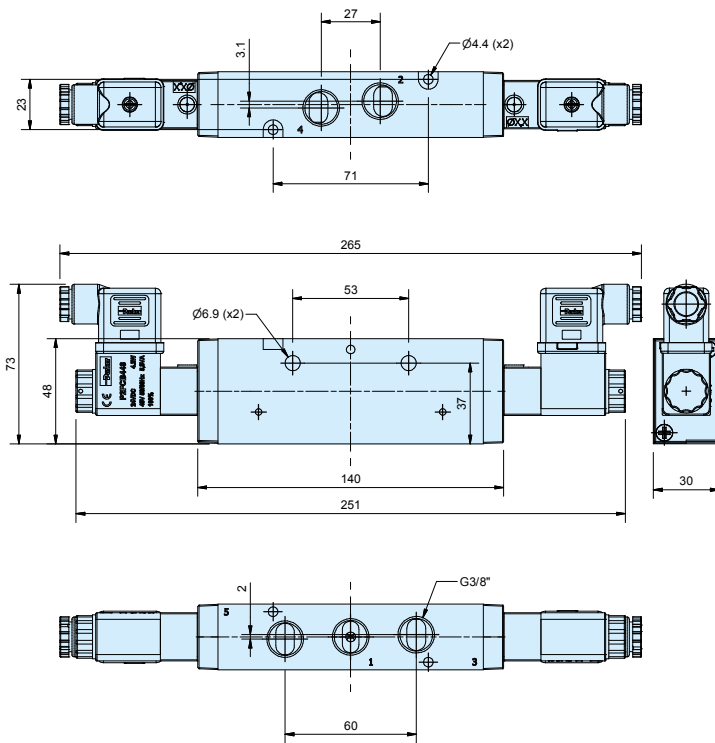


P2LCZ 5/2

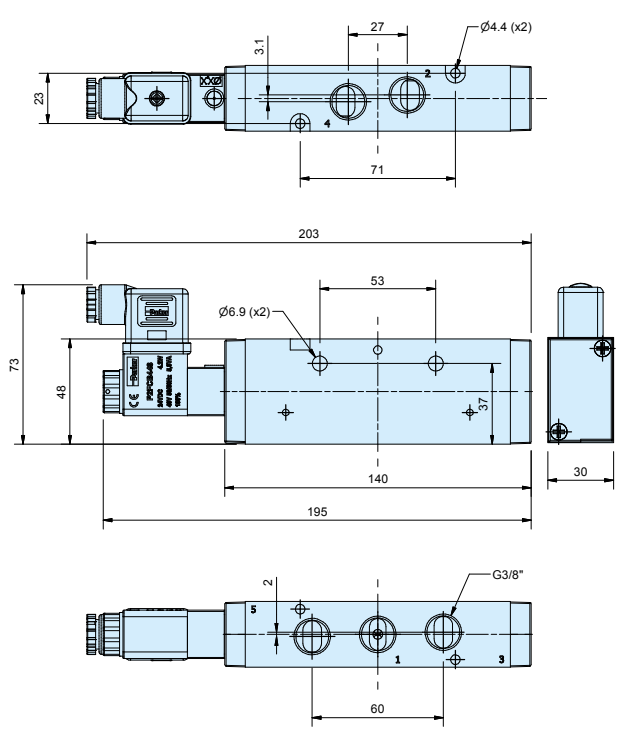

Solenoid / Spring



P2LCZ 5/3

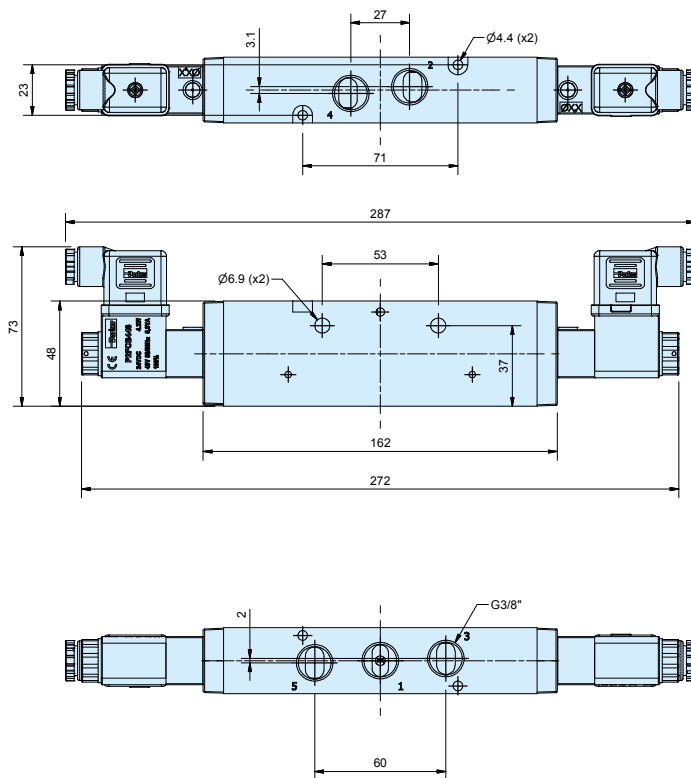
Solenoid / Solenoid



Accessories	Type P2LA / P2LB 3/2 valves	Weight kg	Order code
	<b>Manifold bar, P2LB</b> incl. fasteners and O-ring. G3/8 For 2 valves For 4 valves For 6 valves For 8 valves For 10 valves	0.38 0.64 0.89 1.15 1.40	<b>91213202SXZ</b> <b>91213204SXZ</b> <b>91213206SXZ</b> <b>91213208SXZ</b> <b>91213210SXZ</b>
		0.10	<b>912132BPSXZ</b>


**Dimensions**

**Manifold bar**

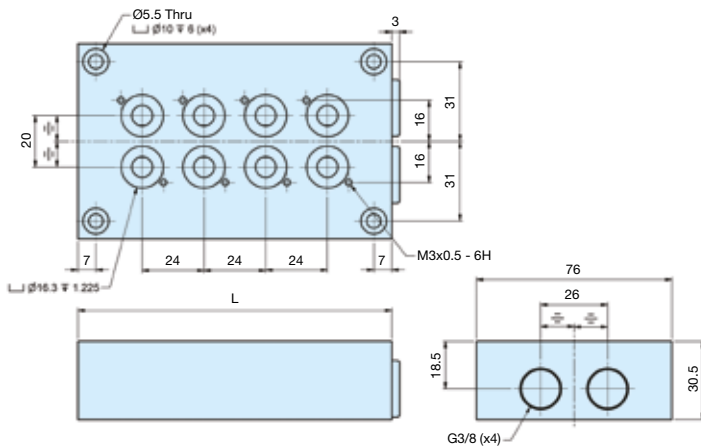





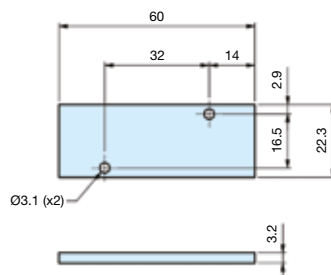


No. of valves	L mm
2	74
4	122
6	170
8	218
10	266

**Blanking plate for manifold bar, P2LB**






Accessories	Type P2LA 5/2 valves	Weight kg	Order code
	<b>Manifold bar, P2LA</b> including seals, mounting screws. G3/8 For 4 valves For 6 valves For 8 valves For 10 valves For 12 valves For 14 valves	0.48 0.63 0.80 0.98 1.10 1.23	9121658075 9121658076 9121658077 9121658078 9121658079 9121658099
	<b>Blanking plate, P2LA</b> for Manifold bar	0.05	9121658063
	<b>Pressure bar, P2LA</b> for common air supply incl. O-rings and mounting screws. G1/4 For 2 valves For 4 valves For 6 valves For 8 valves	0.13 0.20 0.26 0.33	9121658070 9121658071 9121658072 9121658073
	<b>Blanking plate, P2LA</b> for Pressure bar	0.05	9121658074
	<b>Assembly screws, P2LA</b> in stainless steel for valve	0.02	9121658043
	<b>Assembly screws, P2LA</b> in stainless steel for blanking plate	0.01	9121658044
	<b>O-ring kit, P2LA</b> O-rings between valve and manifold bar/Pressure bar	0.01	9121658046

**Dimensions**


**Manifold bar, P2LA**

No. of valves	L mm
4	126
6	174
8	222
10	270
12	318
14	366

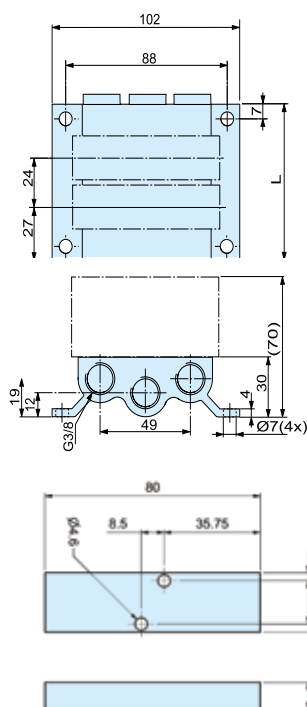


**Blanking plate for manifold bar, P2LA**



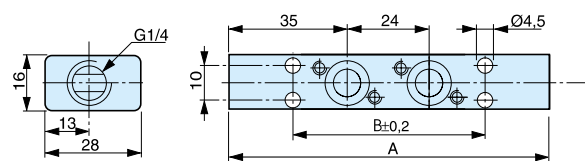

**Pressure bar, P2LA**



**Blanking plate for pressure bar, P2LA**




No. of valves	A mm	B mm
2	94	56
4	142	104
6	190	152
8	238	200

Accessories	Type P2LB 5/2 valves	Weight kg	Order code
	<b>Manifold bar, P2LB</b> incl. fasteners and O-ring. G3/8 For 2 valves For 4 valves For 6 valves For 8 valves For 10 valves	0.69 1.13 1.56 2.00 2.45	<b>9121594805X</b> <b>9121594806X</b> <b>9121594807X</b> <b>9121594808X</b> <b>9121594812X</b>
	<b>Blanking plate, P2LB</b> for Manifold bar	0.10	<b>9121594809X</b>
	<b>Pressure bar, P2LB</b> for common air supply incl. O-rings and mounting screws. G3/8 For 2 valves For 4 valves For 6 valves For 8 valves For 10 valves	0.38 0.53 0.68 0.83 0.99	<b>9127113301X</b> <b>9127113302X</b> <b>9127113303X</b> <b>9127113304X</b> <b>9127113305X</b>
	<b>Blanking plate P2LB</b> for Pressure bar. G1/4	0.02	<b>9127113306X</b>


**Dimensions**

**Manifold bar, P2LB**

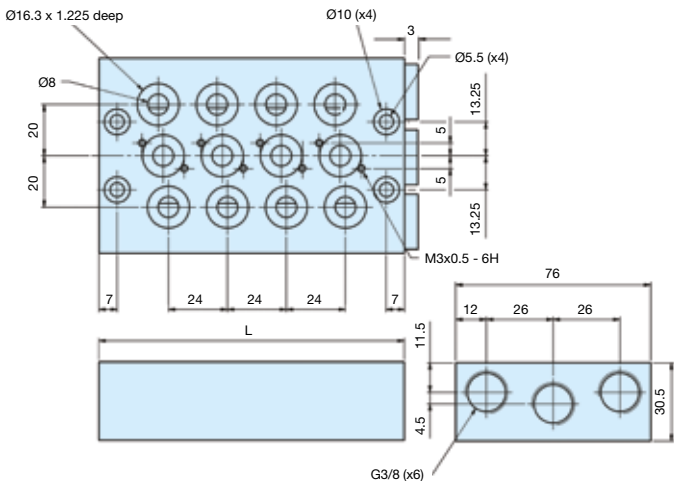


No. of valves	L mm
2	74
4	122
6	170
8	218
10	266


**Blanking plate for manifold bar, P2LB**

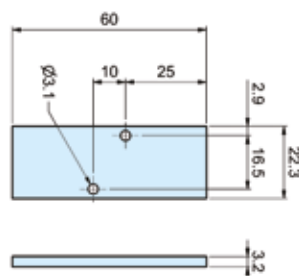

**Pressure bar, P2LB**

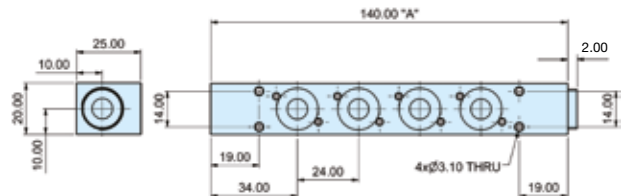

**Blanking plate for pressure bar, P2LB**



No. of valves	A mm
2	92
4	140
6	188
8	236
10	284



## 22mm Solenoid pilot options

The solenoid pilot operators are designed for piloting pneumatic control valves with compressed air or other inert gases.

The operator is available for normal operating pressures up to 10 bar having an outlet orifice 1.2 mm and exhaust orifice 1.45 mm.

### Corrosion resistant design

The pilot operator body is manufactured in thermoplastic PA 6 material and the core tube brass is stainless steel. The plunger/core is also made from stainless steel and the valve seats from FKM.

### Solenoid Pilot Exhaust

These operators all exhaust out of the top of the core tube which is tapped M5. The standard solenoid nut fitted to the core tube is the Diffuser nut which allows the exhaust to escape to atmosphere. This nut also minimises ingress of dirt into the valve through this port. The alternative plastic knurled nut can be specified (refer to part number system) if the exhaust air needs to be captured and piped away using the M5 tapped port.

### Coils

Coils are wound with enameled copper wire, having temperature index 180°C with class F insulation (155°C) and are encapsulated in Thermoplastic resin.

When fitted with suitable connector and correct gasket they give protection to IP65.

### Manual Override options

The standard manual override is the bi-stable twist lock, extended plastic override. Non locking flush manual override available as option.

**22mm solenoid operator part numbers and spares**

**Solenoid coils for 22mm solenoid operators**

Voltage	Weight (Kg)	Order code Form B
12V 60Hz	0.093	<b>P2FCB440</b>
24V 50/60Hz	0.093	<b>P2FCB442</b>
12V DC	0.093	<b>P2FCB445</b>
24V DC	0.093	<b>P2FCB449</b>
48V DC	0.093	<b>P2FCB451</b>
110V/50Hz, 120V/60Hz	0.093	<b>P2FCB453</b>
230V/50Hz, 230V/60Hz	0.093	<b>P2FCB457</b>

**Spare Solenoid Nuts**

**Valves requiring captured exhaust should be fitted with plastic knurled nut**

Order code



**P2FNP**


**Valves with vented exhaust are fitted with diffuser plastic nut**

Order Code

**P2FND**


**Solenoid Connectors / Cable Plugs EN175301-803**

	Description	Order code 22mm Industrial Form B
With standard screw	Standard IP65 without flying lead	<b>3EV10V10</b>
	With LED and protection 24V AC/DC	<b>3EV10V20-24</b>
	With LED and protection 110V AC	<b>3EV10V20-110</b>
	With LED and protection 230V AC	<b>3EV10V20-230</b>
With cable	24V AC/DC, 5m cable LED and protection IP65	<b>3EV10V20-24L5</b>
	110V AC/DC, 5m cable LED and protection IP65	<b>3EV10V20-110L5</b>
	230V AC, 5m cable LED and protection IP65	<b>3EV10V20-230L5</b>

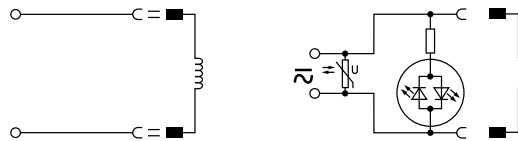

<b>3EV10V10</b>	<b>3EV10V20-24</b>	<b>3EV10V20-24L5</b>
	<b>3EV10V20-110</b>	<b>3EV10V20-110L5</b>
	<b>3EV10V20-230</b>	<b>3EV10V20-230L5</b>

**Cable Plug Dimensions (mm)**

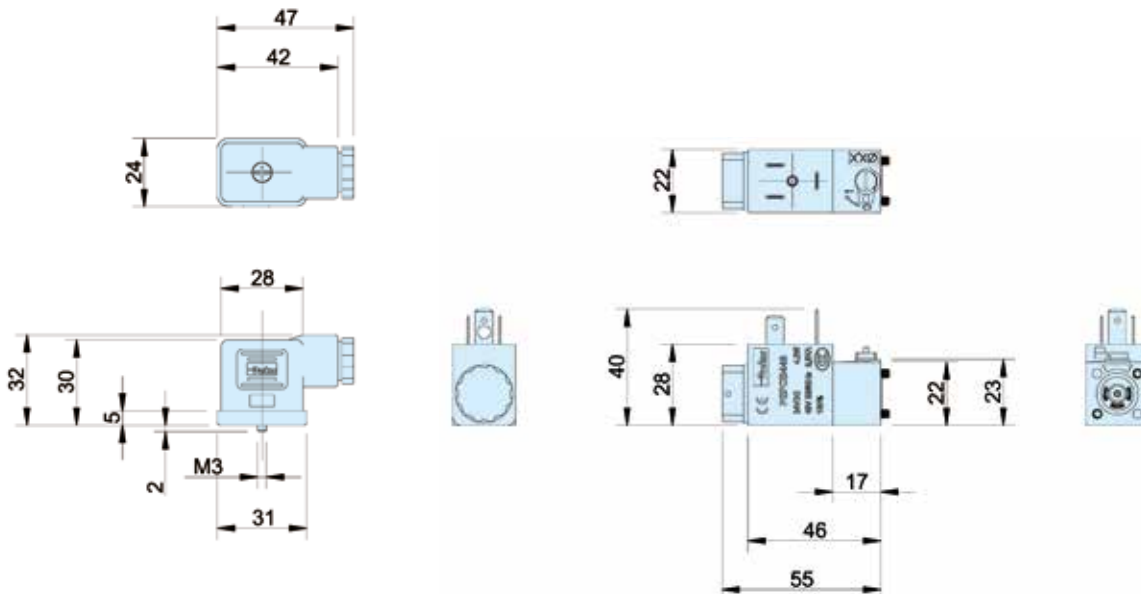







# Parker Worldwide

## Europe, Middle East, Africa

**AE – United Arab Emirates,**  
Dubai

Tel: +971 4 8127100  
parker.me@parker.com

**AT – Austria,** Wiener Neustadt

Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe,** Wiener  
Neustadt

Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

**AZ – Azerbaijan,** Baku

Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium,** Nivelles

Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BG – Bulgaria,** Sofia

Tel: +359 2 980 1344  
parker.bulgaria@parker.com

**BY – Belarus,** Minsk

Tel: +375 17 209 9399  
parker.belarus@parker.com

**CH – Switzerland,** Etoy

Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

**CZ – Czech Republic,** Klecany

Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany,** Kaarst

Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark,** Ballerup

Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain,** Madrid

Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland,** Vantaa

Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France,** Contamine s/Arve

Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece,** Athens

Tel: +30 210 933 6450  
parker.greece@parker.com

**HU – Hungary,** Budaörs

Tel: +36 23 885 470  
parker.hungary@parker.com

**IE – Ireland,** Dublin

Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IT – Italy,** Corsico (MI)

Tel: +39 02 45 19 21  
parker.italy@parker.com

**KZ – Kazakhstan,** Almaty

Tel: +7 7273 561 000  
parker.easteurope@parker.com

**NL – The Netherlands,** Oldenzaal

Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway,** Asker

Tel: +47 66 75 34 00  
parker.norway@parker.com

**PL – Poland,** Warsaw

Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal,** Leca da Palmeira

Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania,** Bucharest

Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia,** Moscow

Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden,** Spånga

Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SL – Slovenia,** Novo Mesto

Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TR – Turkey,** Istanbul

Tel: +90 216 4997081  
parker.turkey@parker.com

**UA – Ukraine,** Kiev

Tel: +380 44 494 2731  
parker.poland@parker.com

**UK – United Kingdom,** Warwick

Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**ZA – South Africa,** Kempton Park

Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

## North America

**CA – Canada,** Milton, Ontario

Tel: +1 905 693 3000

**US – USA,** Cleveland

Tel: +1 216 896 3000

## Asia Pacific

**AU – Australia,** Castle Hill

Tel: +61 (0)2-9634 7777

**CN – China,** Shanghai

Tel: +86 21 2899 5000

**HK – Hong Kong**

Tel: +852 2428 8008

**IN – India,** Mumbai

Tel: +91 22 6513 7081-85

**JP – Japan,** Tokyo

Tel: +81 (0)3 6408 3901

**KR – South Korea,** Seoul

Tel: +82 2 559 0400

**MY – Malaysia,** Shah Alam

Tel: +60 3 7849 0800

**NZ – New Zealand,** Mt Wellington

Tel: +64 9 574 1744

**SG – Singapore**

Tel: +65 6887 6300

**TH – Thailand,** Bangkok

Tel: +662 186 7000

**TW – Taiwan,** Taipei

Tel: +886 2 2298 8987

## South America

**AR – Argentina,** Buenos Aires

Tel: +54 3327 44 4129

**BR – Brazil,** Sao Jose dos Campos

Tel: +55 12 4009 3500

**CL – Chile,** Santiago

Tel: +562 2303 9640

**MX – Mexico,** Toluca

Tel: +52 72 2275 4200

European Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI,  
FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU,  
SE, SK, UK, ZA)

Catalogue PDE2658TCUK - V5 - October 2015

Your local authorized Parker distributor

© 2015 Parker Hannifin Corporation. All rights reserved.



### Parker Hannifin Ltd.

Tachbrook Park Drive  
Tachbrook Park,  
Warwick, CV34 6TU  
United Kingdom  
Tel.: +44 (0) 1926 317 878  
Fax: +44 (0) 1926 317 855  
parker.uk@parker.com  
www.parker.com

DYSTRYBUTOR PARKER PREMIUM

**ARA**<sup>®</sup>  
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCLAW  
pneumatyka@arapneumatik.pl  
TEL. 71 364 72 80

PARKER STORE KATOWICE  
katowice@arapneumatik.pl  
TEL. 32 779 76 40

