


5/2

VALVES FOR AIR PILOT OPERATED




Compact




Manual Override

ANODIZED ALUMINIUM PIPE MOUNTING


NORMALLY CLOSED



Port size	Orifice Ø	Flow factors	Seat Seal	Atex Zone	Operating Pressure Differential		Fluid Temp.		Power	Voltage	Solenoid Valve Order Number		
					Min bar	Max bar	Min °C	Max °C					
BSP	mm	Qn l/min							W				
1/4"	7	1250	NBR	-	2.5	10	-20	50	3	220-230V/50Hz	341P03-496131P9		
					2.5	10	-20	50	3	24 Vdc	341P03-496131C2		
				2-22	2.5	10	-20	50	3	230V/50-60Hz	341P03-496637P9		
					2.5	10	-20	50	3	24 Vdc	341P03-496637C2		
1/2"	12	3000		-	2.5	10	-20	50	3	220-230V/50Hz	341P04-496131P9		
					2.5	10	-20	50	3	24 Vdc	341P04-496131C2		
				2-22	2.5	10	-20	50	3	230V/50-60Hz	341P04-496637P9		
					2.5	10	-20	50	3	24 Vdc	341P04-496637C2		

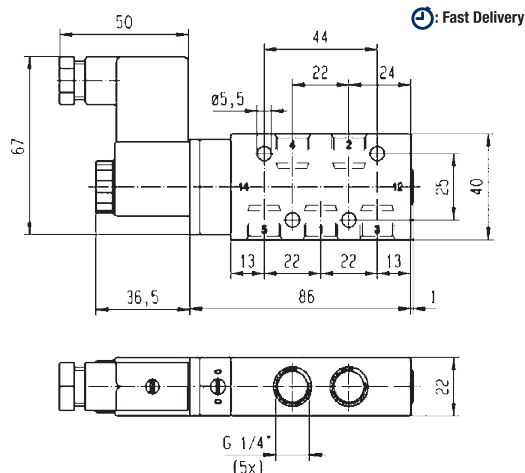

Fast Delivery

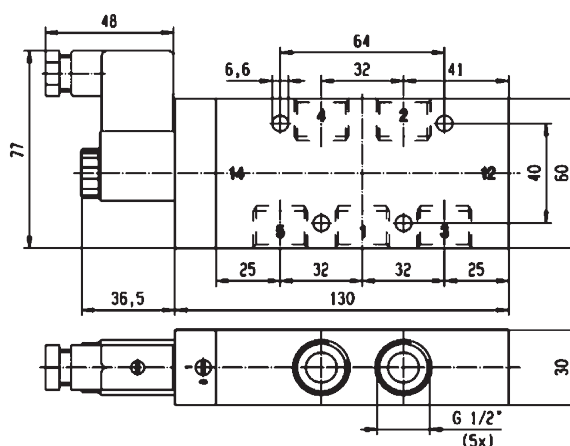

3 & 5 WAY VALVES


Air



Parker Hannifin Corporation
Fluid Control Division Europe
Distribution Catalogue FCDE/0120/UK/V1.0


5/2

VALVES FOR AIR PILOT OPERATED





ANODIZED ALUMINIUM PIPE MOUNTING

DUAL SOLENOIDS



Port size	Orifice Ø	Flow factors	Seat Seal	Atex Zone	Operating Pressure Differential		Fluid Temp.		Power	Voltage	Solenoid Valve Order Number	
					Min bar	Max bar	Min °C	Max °C				
BSP	mm	Qn l/min							W			
1/4"	7	1250	NBR	-	2.5	10	-20	50	3	220-230V/50Hz	347P03-496131P9	
					2.5	10	-20	50	3	24 Vdc	347P03-496131C2	
				2-22	2.5	10	-20	50	3	230V/50-60Hz	347P03-496637P9	
					2.5	10	-20	50	3	24 Vdc	347P03-496637C2	
1/2"	12	3000		-	2.5	10	-20	50	3	220-230V/50Hz	347P04-496131P9	
					2.5	10	-20	50	3	24 Vdc	347P04-496131C2	
				2-22	2.5	10	-20	50	3	230V/50-60Hz	347P04-496637P9	
					2.5	10	-20	50	3	24 Vdc	347P04-496637C2	

: Fast Delivery

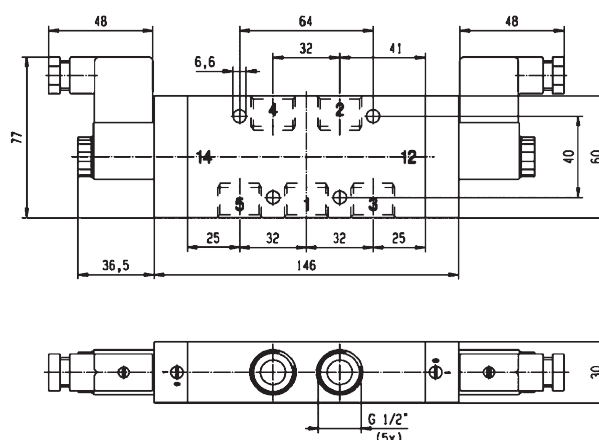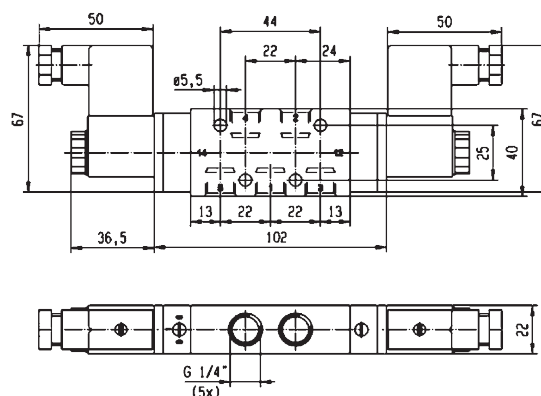

Parker Hannifin Corporation
Fluid Control Division Europe
Distribution Catalogue FCDE/0120/UK/V1.0