

Flow Control Regulators



Available with technical polymer, nickel-plated brass or aluminium bodies, with external or recessed adjustment screws, Flow Control Regulators offer precise adjustment, accuracy and compactness.

Ø metric:
3 to 14 mm

Technical Characteristics

- **Compatible Fluids:** Compressed air
Other fluids: contact us
- **Working Pressure:** 1 to 10 bar
- **Working Temperature:** 0°C to +70°C
-25°C to +70°C (metal version)

Max. Tightening Torques (external adjustment screw)	Threads	M3 x0.5	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m		0.06	0.16	0.8	1.2	3

Max. Tightening Torques (recessed adjustment screw)	Threads	-	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m		-	0.1	0.4	0.5	0.6

Reliable performance is dependent upon the type of fluid conveyed and component materials being used.

Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).


You will find all the flow rate characteristic curves (to 6 bar) for Flow Control Regulators at the end of the chapter.

Regulations

- RoHS
- REACH
- PED

Component Materials

Silicone-free

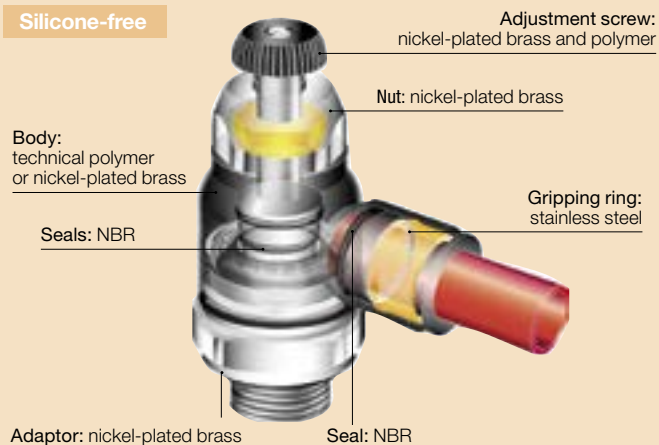

Advantages

Productivity:

- Higher maximum flow than standard regulators
- Optimal control of the cylinder rod speed

Accuracy:


- Precise adjustment for accurate flow regulation
- Long-term stability of flow

Ergonomics:

- External adjustment screw: easy to adjust ; Recessed adjustment screw: protects the adjustment mechanism
- Can be rotated 360° during assembly

7011 Flow Regulator Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



ØD	C		E	F	H	L	L1	Kg
4	M5x0.8	7011 04 19	4	8	17.5	17	5	0.006
	G1/8	7011 04 10	5	13	25	19	7	0.017
6	M5x0.8	7011 06 19	4	8	17.5	19	5	0.006
	G1/8	7011 06 10	5	13	25	21	7	0.018
	G1/4	7011 06 13	8	17	26.5	22	9.5	0.034
8	G1/8	7011 08 10	5	13	25	26	7	0.019
	G1/4	7011 08 13	8	17	26.5	27	9.5	0.034
	G3/8	7011 08 17	7.5	20	37.5	29	11	0.067
10	G1/4	7011 10 13	8	17	26.5	29	9.5	0.036
	G3/8	7011 10 17	7.5	20	37.5	31	11	0.068

DYSTRYBUTOR PARKER PREMIUM

ARA[®]
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCŁAW
pneumatyka@arapneumatik.pl
TEL. 71 364 72 80

PARKER STORE KATOWICE
katowice@arapneumatik.pl
TEL. 32 779 76 40

Parker Store