

Flow Control Regulators



Available with technical polymer, nickel-plated brass or aluminium bodies, with external or recessed adjustment screws, Flow Control Regulators offer precise adjustment, accuracy and compactness.

Ø metric:
3 to 14 mm

Technical Characteristics

- **Compatible Fluids:** Compressed air
Other fluids: contact us
- **Working Pressure:** 1 to 10 bar
- **Working Temperature:** 0°C to +70°C
-25°C to +70°C (metal version)

Max. Tightening Torques (external adjustment screw)	Threads	M3 x0.5	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m	0.06	0.16	0.8	1.2	3	3.5

Max. Tightening Torques (recessed adjustment screw)	Threads	-	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m	-	-	0.1	0.4	0.5	0.6

Reliable performance is dependent upon the type of fluid conveyed and component materials being used.

Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).


You will find all the flow rate characteristic curves (to 6 bar) for Flow Control Regulators at the end of the chapter.

Regulations

- RoHS
- REACH
- PED

Component Materials

Silicone-free

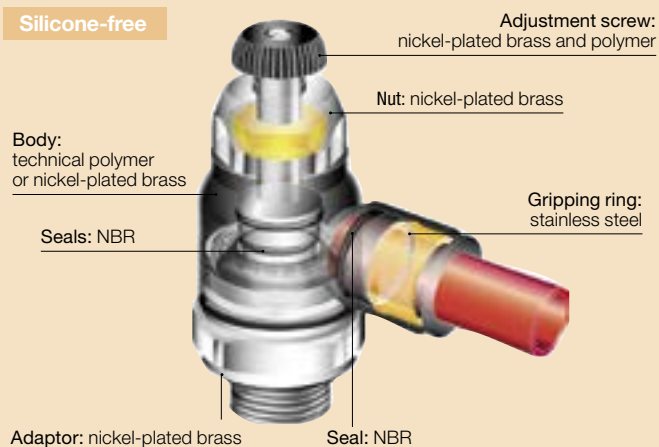

Advantages

Productivity:

- Higher maximum flow than standard regulators
- Optimal control of the cylinder rod speed

Accuracy:


- Precise adjustment for accurate flow regulation
- Long-term stability of flow

Ergonomics:

- External adjustment screw: easy to adjust ; Recessed adjustment screw: protects the adjustment mechanism
- Can be rotated 360° during assembly

7776 Panel-Mountable In-Line One-Way Flow Regulator

Technical polymer, Nickel-plated brass, NBR



ØD		F	F1	H	H max	H1	H2	K	L	ØT	Kg
4	7776 04 00*	14	38	41	6.5	11	6	36	10.5	0.015	
6	7776 06 00*	22	45.5	49	7.5	13.5	7	51	16.5	0.038	
8	7776 08 00	22	11	45.5	54	9	13.5	7	58	18.5	0.069
10	7776 10 00	30	14	54	62	11.5	13.5	7	73	24.5	0.136
12	7776 12 00	32	14	61	71	12.5	15.5	8	85	27.5	0.185

*Ultrafine adjustment

DYSTRYBUTOR PARKER PREMIUM

ARA[®]
PNEUMATIK

| arapneumatik.pl

PARKER STORE WROCLAW
pneumatyka@arapneumatik.pl
TEL. 71 364 72 80

PARKER STORE KATOWICE
katowice@arapneumatik.pl
TEL. 32 779 76 40

Parker Store