




ET-Module PF3SAAZTT

ET-Module with proximity switches Pepperl+Fuchs SJ 3,5-SN
in Aluminium-Housing 125 x 80 x 57 mm, Temperature range up to -50°C

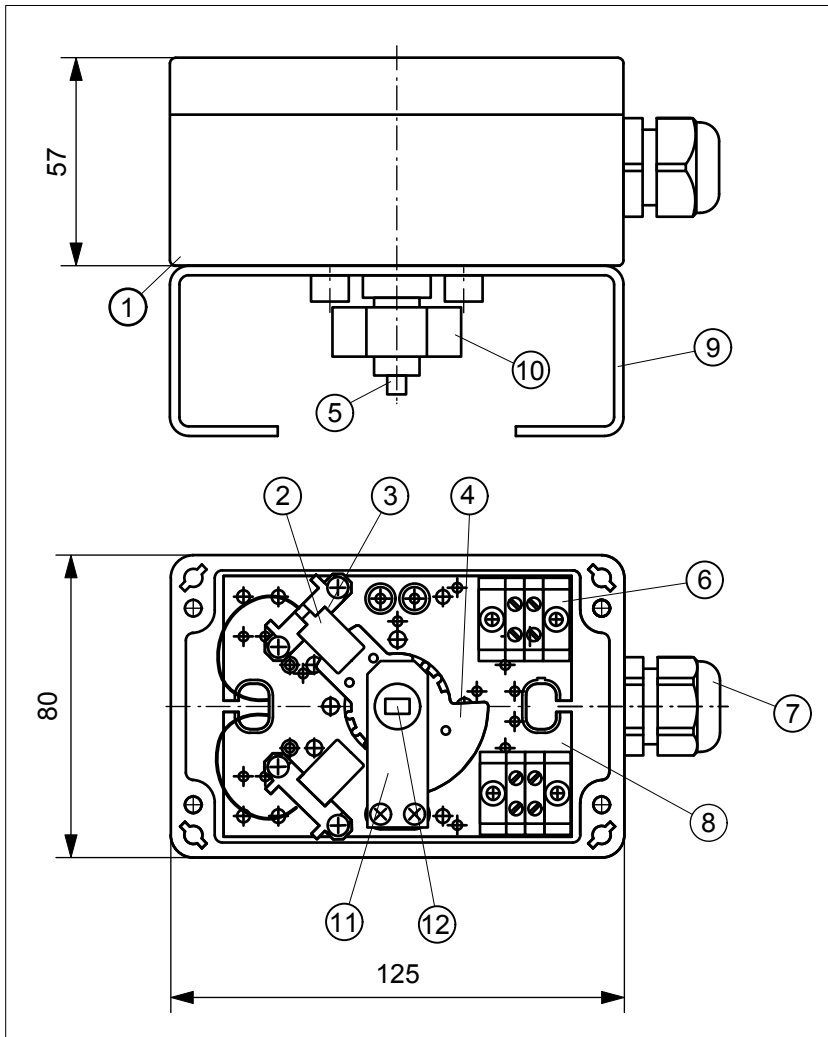

TECHNICAL DATA

Manufacturer: Pepperl+Fuchs
 Type: SJ 3,5-SN
 Slot type, NAMUR
 Normally closed contact
 with saftey function

Depth of immersion: 5-7 mm
 Nominal voltage: 8 V DC
 Switch. frequency: 0 ... 3000 Hz
 Current consumpt.: > 3 mA, inactive
 < 1 mA, active

Temperature: -50 ... +70°C
 Housing: Aluminium, light grey
 Sealing: Silicon
 Ingress protection: IP67 (Sensor)
 IP65 (Housing)


Switching precision: <0.5°
 System connection: Cable gland M20x1,5



OBJECT LIST

| Pos. | Pcs. | Description | Material |
|------|------|------------------------|-------------------|
| 1 | 1 | Housing | Aluminium |
| 2 | 2 | P+F SJ 3,5 SN | - |
| 3 | 2 | Fastener SJ | PA 6 |
| 4 | 2 | Switch plate | A2 |
| 5 | 1 | Axis Standard | A2 |
| 6 | 2 | Terminal block, 2-pole | - |
| 7 | 1 | Cable gland | Brass nick.-plat. |
| 8 | 1 | Mounting plate | PA 6 |
| 9 | 1 | Bracket size 1 - 4 | A2 |
| 10 | 1 | Position indicator | PE |
| 11 | 1 | Bearing plate, short | Steel nick.-plat. |
| 12 | 1 | Axis, long | PE |

WIRING DIAGRAM

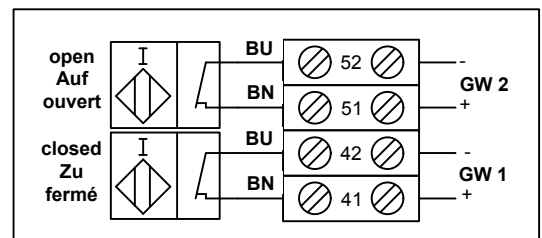

ARA

PNEUMATIK

53-012 Wrocław tel. 71 364 72 85
ul. Wysięgowa 38 fax 71 364 72 83

www.arapneumatik.pl

